


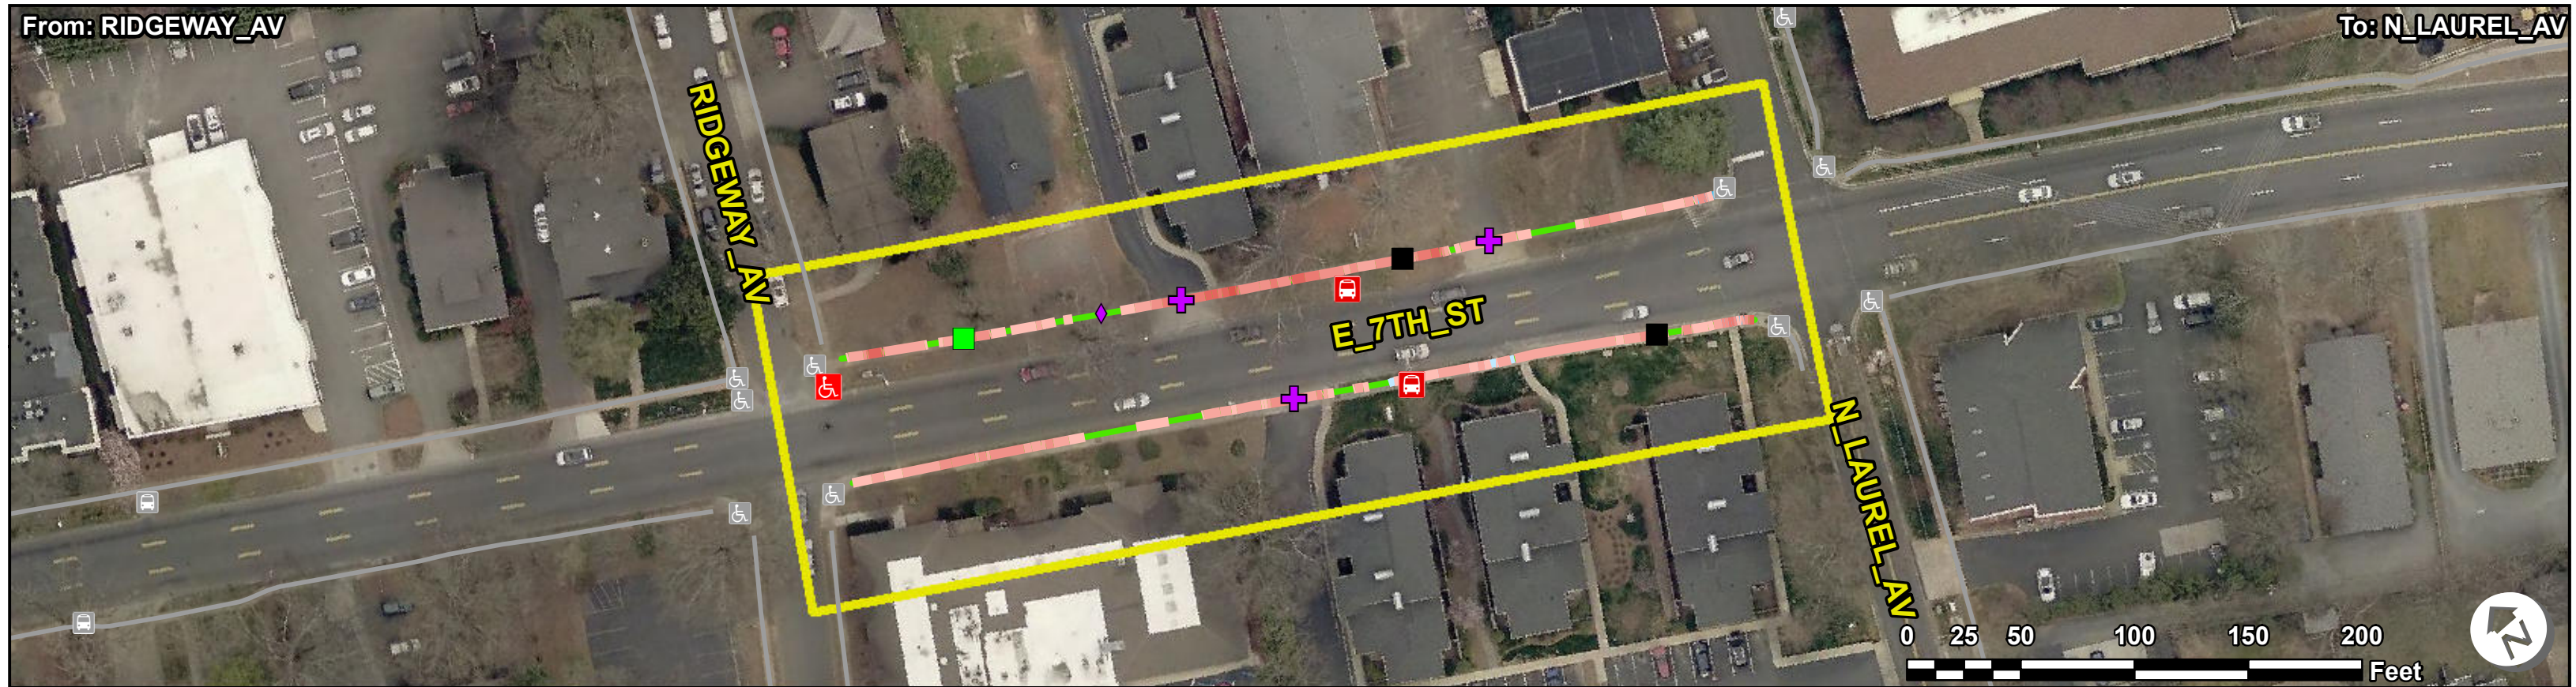

ADA Survey Summary				ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate							
Item Description		Quantity		Item Description		Quantity	Unit Price	Item Cost	Item Description		Total Count	Non Compliant Count	Cost		
1	Heavings less than 1"	19 EA		1	Heavings less than 1"	3 EA	\$ 100.00	\$ 300.00	Curb Ramps	1	1	\$ 1500.00	● Heavings < 1" (Excluded)***	● Heavings < 1"	
2	Heavings 1" or greater	2 EA		2	Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00	Island Curb Cuts	0	0	\$ 0.00	● Heavings ≥ 1" (Excluded)***	● Heavings ≥ 1"	
3	Uneven Heavings	0 EA		3	Uneven Heavings	0 EA	\$ 400.00	\$ 0.00	Signal Push Buttons	0	0	\$ 0.00	● Uneven Heaving (Excluded)***	● Uneven Heaving	
4	Heaving Clusters	4.351 SY		4	Heaving Clusters	0 SY	\$ 75.00	\$ 0.00	Transit Stops	2	2	\$ 4250.00	— Heaving Clusters (Excluded)	— Heaving Clusters	
5	Sidewalk Joint Gaps	0 EA		5	Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings	0	0	\$ 0.00	▲ Sidewalk Joint Gap (Excluded)***	▲ Sidewalk Joint Gap	
6	Miscellaneous Obstruction	0 EA		6	Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces	0	0	\$ 0.00	■ Miscellaneous Obstruction	◆ Commercial Entrance	
7	Missing Sidewalk Obstruction	0 EA		7	Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:		\$ 5750.00	■ Missing Sidewalk Obstruction	◆ Residential Entrance		
8	Other Obstruction	0 EA		8	Other Obstruction	0 EA	\$ 500.00	\$ 0.00	Corridor Total: \$ 46218.00				■ Other Obstruction	✚ Commercial Entrance (within slope violation)	
9	Pole Post Hydrant Obstruction	0 EA		9	Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00					■ Pole Post Hydrant Obstruction	✚ Residential Entrance (within slope violation)	
10	Ponding Obstruction	0 EA		10	Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00	Curb Ramps - Compliant Curb Ramps - Adjacent				■ Ponding Obstruction	Cross Slope	
11	Sidewalk Joint Obstruction	0 EA		11	Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00					Island Curb Cuts - Compliant Island Curb Cuts - Adjacent		
12	Sign Obstruction	0 EA		12	Sign Obstruction	0 EA	\$ 150.00	\$ 0.00	Island Curb Cuts - Non Compliant						
13	Storm Grate Obstruction	0 EA		13	Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00					Signals - Compliant Signals - Adjacent		
14	Transit Obstruction	0 EA		14	Transit Obstruction	0 EA	\$500.00	\$ 0.00	Signals - Non Compliant						
15	Traffic Obstruction	0 EA		15	Traffic Obstruction	0 EA	\$2000.00	\$ 0.00					Transit Stops - Compliant Transit Stops - Adjacent		
16	Tree Obstruction	0 EA		16	Tree Obstruction	0 EA	\$500.00	\$ 0.00	Transit Stops - Non Compliant						
17	Utility Obstruction	2 EA		17	Utility Obstruction	2 EA	\$1500.00	\$ 3000.00					Railroad Crossings - Compliant Railroad Crossings - Adjacent		
18	Vegetation Obstruction - Low	1 EA		18	Vegetation Obstruction - Low	1 EA	\$150.00	\$ 150.00	Railroad Crossings - Non Compliant						
19	Vegetation Obstruction - Overhead	0 EA		19	Vegetation Obstruction - Overhead	0 EA	\$150.00	\$ 0.00					Accessible Parking - Compliant Accessible Parking - Adjacent		
20	Commercial Entrance	4 EA		20	Commercial Entrance (within slope violation)	3 EA	\$ 5000.00	\$ 15000.00	Accessible Parking - Non Compliant						
21	Residential Entrance	0 EA		21	Residential Entrance (within slope violation)	0 EA	\$ 3000.00	\$ 0.00					Sidewalk SubTotal: \$ 40468.00		
22	Total Sidewalk Length Assessed	790.997 LF		22	Running Slope Violations**	1.332 SY	\$ 75.00	\$ 100.00	Buried Sidewalk						
23	Average Sidewalk Width	52 IN		23	Cross Slope Violations	263.218 SY	\$ 75.00	\$ 19741.00					Sidewalk Not Surveyed		
24	No Sidewalk on Block (Approx.)	0 LF		24	Running and Cross Slope Violations	29.026 SY	\$ 75.00	\$ 2177.00	Missing Sidewalk Gap						
25	Missing Sidewalk Gaps (Approx.)	0 LF		25	Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00					No Sidewalk on Block		
26	Poor Surface Condition (Approx.)	0 LF		26	Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00							
27	Buried Sidewalk (Approx.)	0 LF		27	Buried Sidewalk (Approx.)	0 LF	\$ 41.67	\$ 0.00							

*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.

**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.

***Note: Excluded items are violations that occur in areas with slope violations and have been excluded from the cost estimate.