


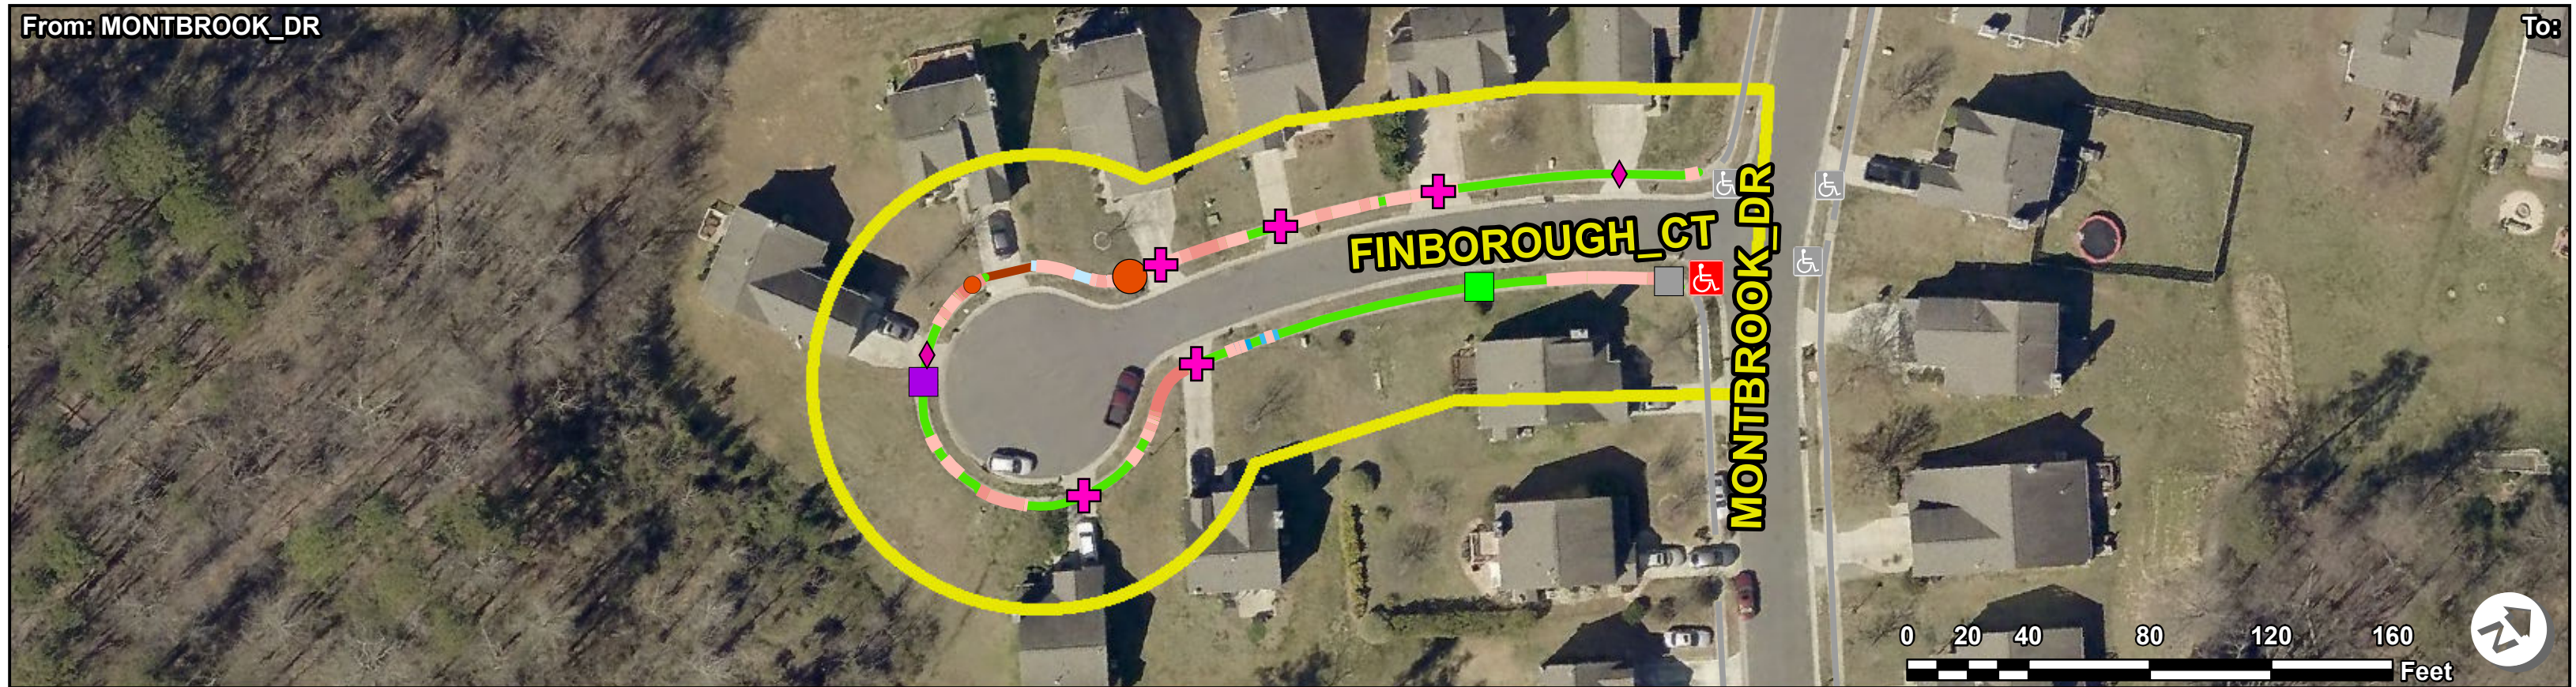

ADA Survey Summary		ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate										
Item	Description	Quantity	Item	Description	Quantity	Unit Price	Item Cost	Item	Description	Total Count	Non Compliant Count	Cost				
1	Heavings less than 1"	12 EA	1	Heavings less than 1"	4 EA	\$ 100.00	\$ 400.00	Curb Ramps		1	1	\$ 3200.00	●	Heavings < 1" (Excluded)***	●	Heavings < 1"
2	Heavings 1" or greater	0 EA	2	Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00	Island Curb Cuts		0	0	\$ 0.00	●	Heavings ≥ 1" (Excluded)***	●	Heavings ≥ 1"
3	Uneven Heavings	2 EA	3	Uneven Heavings	1 EA	\$ 400.00	\$ 400.00	Signal Push Buttons		0	0	\$ 0.00	●	Uneven Heaving (Excluded)***	●	Uneven Heaving
4	Heaving Clusters	7.104 SY	4	Heaving Clusters	1.776 SY	\$ 75.00	\$ 133.00	Transit Stops		0	0	\$ 0.00	—	Heaving Clusters (Excluded)	—	Heaving Clusters
5	Sidewalk Joint Gaps	0 EA	5	Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings		0	0	\$ 0.00	▲	Sidewalk Joint Gap (Excluded)***	▲	Sidewalk Joint Gap
6	Miscellaneous Obstruction	1 EA	6	Miscellaneous Obstruction	1 EA	\$ 1500.00	\$ 1500.00	Accessible Parking Spaces		0	0	\$ 0.00	■	Miscellaneous Obstruction	◆	Commercial Entrance
7	Missing Sidewalk Obstruction	0 EA	7	Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:			\$ 3200.00	■	Missing Sidewalk Obstruction	◆	Residential Entrance	
8	Other Obstruction	0 EA	8	Other Obstruction	0 EA	\$ 500.00	\$ 0.00					■	Other Obstruction	⊕	Commercial Entrance (within slope violation)	
9	Pole Post Hydrant Obstruction	0 EA	9	Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00					■	Pole Post Hydrant Obstruction	⊕	Residential Entrance (within slope violation)	
10	Ponding Obstruction	0 EA	10	Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00					■	Ponding Obstruction			
11	Sidewalk Joint Obstruction	0 EA	11	Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00					■	Sidewalk Joint Obstruction	—	2 - 3%	
12	Sign Obstruction	1 EA	12	Sign Obstruction	1 EA	\$ 150.00	\$ 150.00					■	Sign Obstruction	—	3.01 - 4%	
13	Storm Grate Obstruction	0 EA	13	Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00					■	Storm Grate Obstruction	—	4.01 - 5%	
14	Transit Obstruction	0 EA	14	Transit Obstruction	0 EA	\$500.00	\$ 0.00					■	Transit Obstruction	—	5.01% - 6%	
15	Traffic Obstruction	0 EA	15	Traffic Obstruction	0 EA	\$2000.00	\$ 0.00					■	Traffic Obstruction	—	6.01 - 7%	
16	Tree Obstruction	0 EA	16	Tree Obstruction	0 EA	\$500.00	\$ 0.00					■	Tree Obstruction			
17	Utility Obstruction	0 EA	17	Utility Obstruction	0 EA	\$1500.00	\$ 0.00					■	Utility Obstruction			
18	Vegetation Obstruction - Low	1 EA	18	Vegetation Obstruction - Low	1 EA	\$150.00	\$ 150.00					■	Vegetation Obstruction - Low	—	5 - 8.33%	
19	Vegetation Obstruction - Overhead	0 EA	19	Vegetation Obstruction - Overhead	0 EA	\$150.00	\$ 0.00					■	Vegetation Obstruction - Overhead	—	8.34% - 10%	
20	Commercial Entrance	0 EA	20	Commercial Entrance (within slope violation)	0 EA	\$ 5000.00	\$ 0.00					■	Sidewalk Collection Path	—	10.01 - 12.5%	
21	Residential Entrance	7 EA	21	Residential Entrance (within slope violation)	5 EA	\$ 3000.00	\$ 15000.00					—	Adjacent Sidewalk Collection Path	—	> 12.5%	
22	Total Sidewalk Length Assessed	566.177 LF	22	Running Slope Violations**	0 SY	\$ 75.00	\$ 0.00					—	Buried Sidewalk			
23	Average Sidewalk Width	48 IN	23	Cross Slope Violations	85.499 SY	\$ 75.00	\$ 6412.00					—	Sidewalk Not Surveyed			
24	No Sidewalk on Block (Approx.)	0 LF	24	Running and Cross Slope Violations	19.51 SY	\$ 75.00	\$ 1463.00					—	Missing Sidewalk Gap			
25	Missing Sidewalk Gaps (Approx.)	0 LF	25	Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00					—	No Sidewalk on Block			
26	Poor Surface Condition (Approx.)	0 LF	26	Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00									
27	Buried Sidewalk (Approx.)	0 LF	27	Buried Sidewalk (Approx.)	0 LF	\$ 41.67	\$ 0.00									
Sidewalk SubTotal:							\$ 25609.00									

Corridor Total:

\$ 28809.00

■ Curb Ramps - Compliant

■ Curb Ramps - Non Compliant

■ Island Curb Cuts - Compliant

■ Island Curb Cuts - Non Compliant

■ Signals - Compliant

■ Signals - Non Compliant

■ Transit Stops - Compliant

■ Transit Stops - Non Compliant

■ Railroad Crossings - Compliant

■ Railroad Crossings - Non Compliant

■ Accessible Parking - Compliant

■ Accessible Parking - Non Compliant

■ Curb Ramps - Adjacent

■ Island Curb Cuts - Adjacent

■ Signals - Adjacent

■ Transit Stops - Adjacent

■ Railroad Crossings - Adjacent

■ Accessible Parking - Adjacent

● Heavings < 1" (Excluded)***

● Heavings ≥ 1" (Excluded)***

● Uneven Heaving (Excluded)***

● Heaving Clusters (Excluded)

▲ Sidewalk Joint Gap (Excluded)***

■ Miscellaneous Obstruction

■ Missing Sidewalk Obstruction

■ Other Obstruction

■ Pole Post Hydrant Obstruction

■ Ponding Obstruction

■ Sidewalk Joint Obstruction

■ Sign Obstruction

■ Storm Grate Obstruction

■ Transit Obstruction

■ Traffic Obstruction

■ Tree Obstruction

■ Utility Obstruction

■ Vegetation Obstruction - Low

■ Vegetation Obstruction - Overhead

■ Sidewalk Collection Path

■ Adjacent Sidewalk Collection Path

■ Buried Sidewalk

■ Sidewalk Not Surveyed

■ Missing Sidewalk Gap

■ No Sidewalk on Block

● Heavings < 1"

● Heavings ≥ 1"

● Uneven Heaving

● Heaving Clusters

▲ Sidewalk Joint Gap

◆ Commercial Entrance

◆ Residential Entrance

◆ Commercial Entrance (within slope violation)

◆ Residential Entrance (within slope violation)

Cross Slope

2 - 3%

3.01 - 4%

4.01 - 5%

5.01% - 6%

6.01 - 7%

7.01 - 8%

8.01 - 9%

9.01 - 10%

10.01 - 12%

> 12%

Running Slope

5 - 8.33%

8.34% - 10%

10.01 - 12.5%

> 12.5%

*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.

**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.

***Note: Excluded items are violations that occur in areas with slope violations and have been excluded from the cost estimate.