


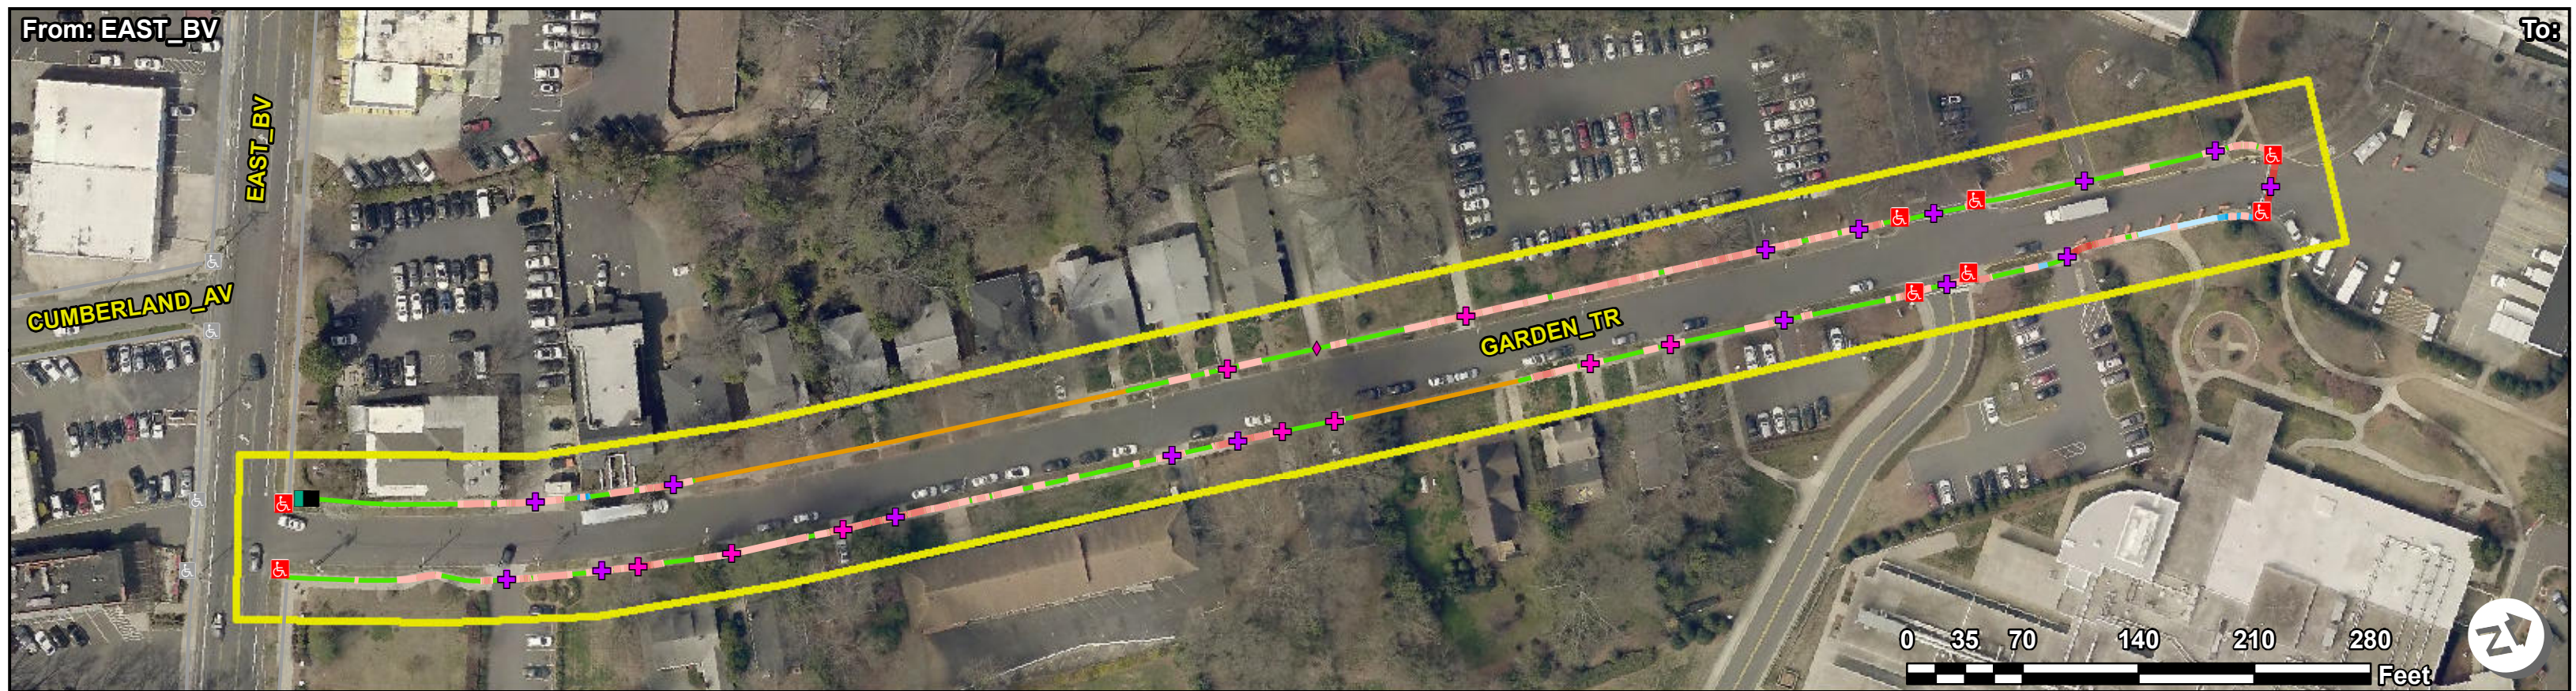

ADA Survey Summary			ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate													
Item	Description	Quantity	Item	Description	Quantity	Unit Price	Item Cost	Item	Description	Total Count	Non Compliant Count	Cost								
1	Heavings less than 1"	42 EA	1	Heavings less than 1"	15 EA	\$ 100.00	\$ 1500.00	Curb Ramps		8	8	\$ 21300.00	●	Heavings < 1" (Excluded)***	●	Heavings < 1"				
2	Heavings 1" or greater	2 EA	2	Heavings 1" or greater	1 EA	\$ 400.00	\$ 400.00	Island Curb Cuts		0	0	\$ 0.00	●	Heavings ≥ 1" (Excluded)***	●	Heavings ≥ 1"				
3	Uneven Heavings	0 EA	3	Uneven Heavings	0 EA	\$ 400.00	\$ 0.00	Signal Push Buttons		0	0	\$ 0.00	●	Uneven Heaving (Excluded)***	●	Uneven Heaving				
4	Heaving Clusters	9.765 SY	4	Heaving Clusters	0 SY	\$ 75.00	\$ 0.00	Transit Stops		0	0	\$ 0.00	—	Heaving Clusters (Excluded)	—	Heaving Clusters				
5	Sidewalk Joint Gaps	0 EA	5	Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings		0	0	\$ 0.00	▲	Sidewalk Joint Gap (Excluded)***	▲	Sidewalk Joint Gap				
6	Miscellaneous Obstruction	0 EA	6	Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces		0	0	\$ 0.00	■	Miscellaneous Obstruction	◆	Commercial Entrance				
7	Missing Sidewalk Obstruction	0 EA	7	Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:			\$ 21300.00		■	Missing Sidewalk Obstruction	◆	Residential Entrance				
8	Other Obstruction	0 EA	8	Other Obstruction	0 EA	\$ 500.00	\$ 0.00	Corridor Total:			\$ 168918.00		■	Other Obstruction	✚	Commercial Entrance (within slope violation)				
9	Pole Post Hydrant Obstruction	0 EA	9	Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00						■	Pole Post Hydrant Obstruction	✚	Residential Entrance (within slope violation)				
10	Ponding Obstruction	0 EA	10	Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00						■	Ponding Obstruction		Cross Slope				
11	Sidewalk Joint Obstruction	0 EA	11	Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00						■	Sidewalk Joint Obstruction	■	2 - 3%	■	7.01 - 8%		
12	Sign Obstruction	0 EA	12	Sign Obstruction	0 EA	\$ 150.00	\$ 0.00						■	Sign Obstruction	■	3.01 - 4%	■	8.01 - 9%		
13	Storm Grate Obstruction	0 EA	13	Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00						■	Storm Grate Obstruction	■	4.01 - 5%	■	9.01 - 10%		
14	Transit Obstruction	0 EA	14	Transit Obstruction	0 EA	\$500.00	\$ 0.00						■	Transit Obstruction	■	5.01% - 6%	■	10.01 - 12%		
15	Traffic Obstruction	0 EA	15	Traffic Obstruction	0 EA	\$2000.00	\$ 0.00						■	Traffic Obstruction	■	6.01 - 7%	■	> 12%		
16	Tree Obstruction	0 EA	16	Tree Obstruction	0 EA	\$500.00	\$ 0.00						■	Tree Obstruction		Running Slope				
17	Utility Obstruction	1 EA	17	Utility Obstruction	1 EA	\$1500.00	\$ 1500.00						■	Utility Obstruction	■	5 - 8.33%	■	8.34% - 10%		
18	Vegetation Obstruction - Low	0 EA	18	Vegetation Obstruction - Low	0 EA	\$150.00	\$ 0.00						■	Vegetation Obstruction - Low	■	10.01 - 12.5%	■	> 12.5%		
19	Vegetation Obstruction - Overhead	1 EA	19	Vegetation Obstruction - Overhead	1 EA	\$150.00	\$ 150.00						■	Vegetation Obstruction - Overhead	■		■			
20	Commercial Entrance	16 EA	20	Commercial Entrance (within slope violation)	16 EA	\$ 5000.00	\$ 80000.00						■	Sidewalk Collection Path	—		■			
21	Residential Entrance	10 EA	21	Residential Entrance (within slope violation)	9 EA	\$ 3000.00	\$ 27000.00						■	Adjacent Sidewalk Collection Path	—		■			
22	Total Sidewalk Length Assessed	2098.932 LF	22	Running Slope Violations**	3.386 SY	\$ 75.00	\$ 254.00						■	Buried Sidewalk	■		■			
23	Average Sidewalk Width	62.667 IN	23	Cross Slope Violations	475.92 SY	\$ 75.00	\$ 35694.00						■	Sidewalk Not Surveyed	■		■			
24	No Sidewalk on Block (Approx.)	0 LF	24	Running and Cross Slope Violations	14.931 SY	\$ 75.00	\$ 1120.00						■	Missing Sidewalk Gap	■		■			
25	Missing Sidewalk Gaps (Approx.)	0 LF	25	Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00						■	No Sidewalk on Block	■		■			
26	Poor Surface Condition (Approx.)	0 LF	26	Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00						■				■			
27	Buried Sidewalk (Approx.)	372.094 LF	27	Buried Sidewalk (Approx.)	372.094 LF	\$ 41.67	\$ 15400.00						■				■			
			Sidewalk SubTotal:				\$ 147618.00													
*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.																				
**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.																				