


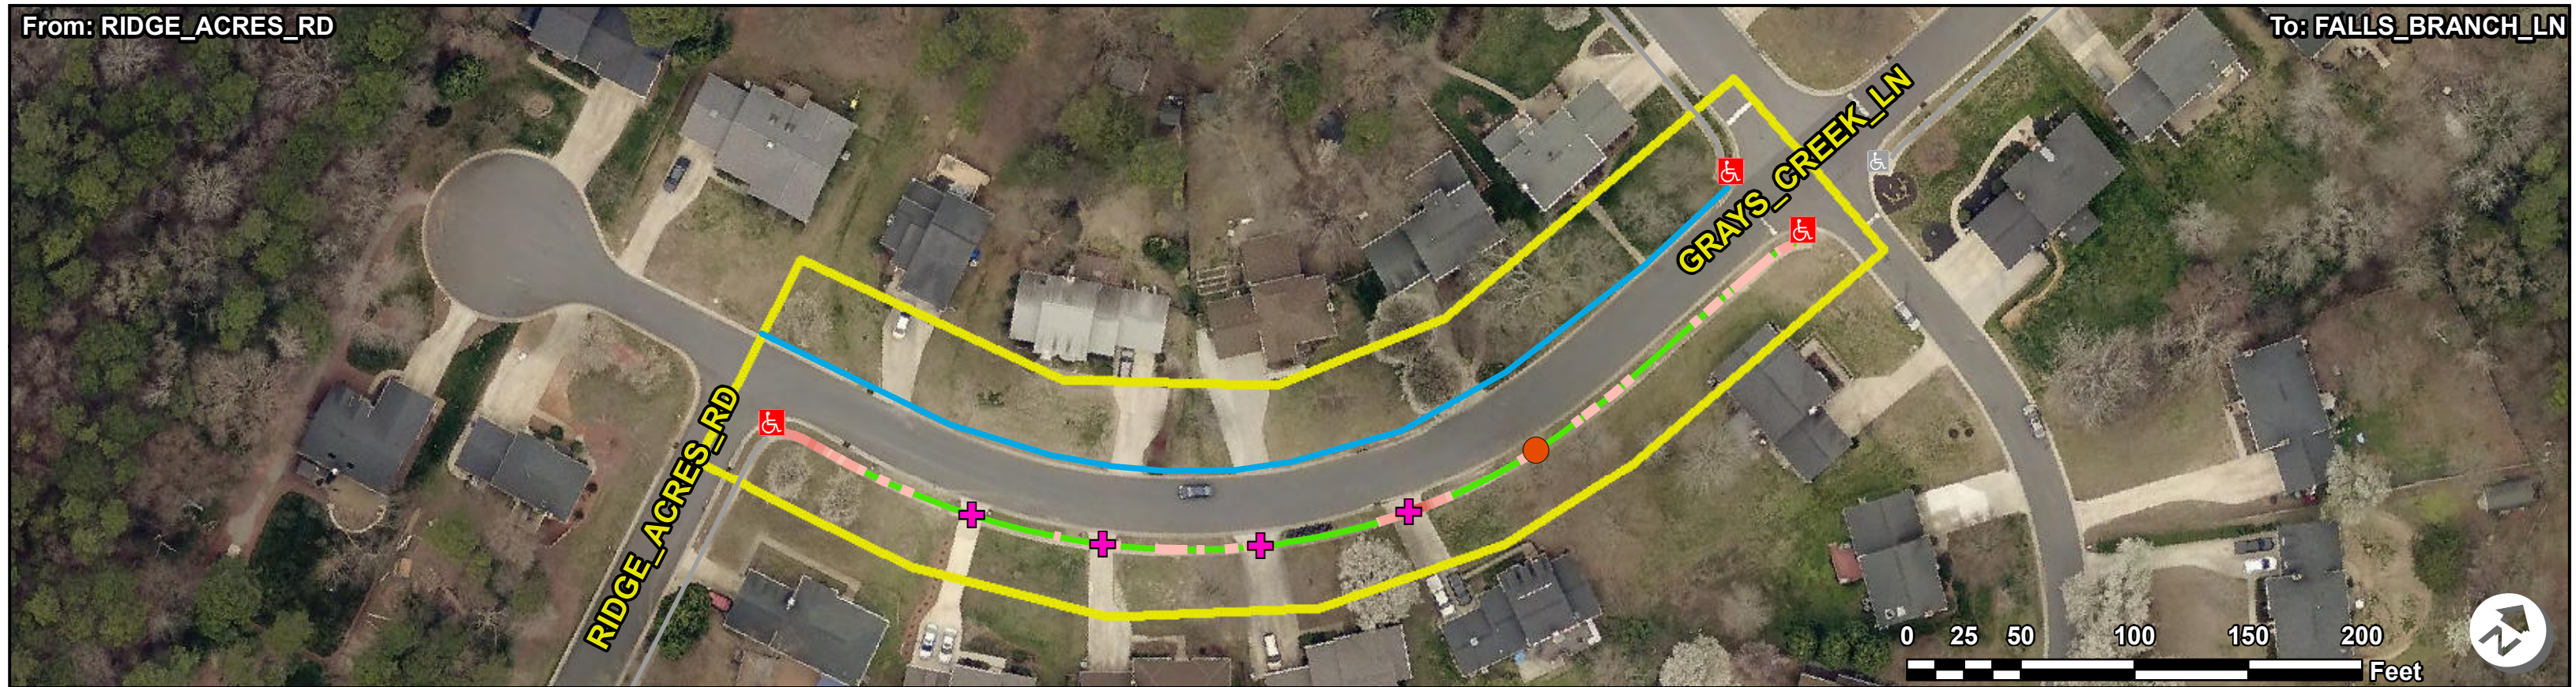

ADA Survey Summary		ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate									
Item	Description	Quantity	Item	Description	Quantity	Unit Price	Item Cost	Item	Description	Total Count	Non Compliant Count	Cost			
1	Heavings less than 1"	4 EA	1	Heavings less than 1"	2 EA	\$ 100.00	\$ 200.00	Curb Ramps		3	3	\$ 6900.00	●	Heavings < 1" (Excluded)***	● Heavings < 1"
2	Heavings 1" or greater	0 EA	2	Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00	Island Curb Cuts		0	0	\$ 0.00	●	Heavings ≥ 1" (Excluded)***	● Heavings ≥ 1"
3	Uneven Heavings	1 EA	3	Uneven Heavings	1 EA	\$ 400.00	\$ 400.00	Signal Push Buttons		0	0	\$ 0.00	●	Uneven Heaving (Excluded)***	● Uneven Heaving
4	Heaving Clusters	3.614 SY	4	Heaving Clusters	0 SY	\$ 75.00	\$ 0.00	Transit Stops		0	0	\$ 0.00	—	Heaving Clusters (Excluded)	— Heaving Clusters
5	Sidewalk Joint Gaps	0 EA	5	Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings		0	0	\$ 0.00	▲	Sidewalk Joint Gap (Excluded)***	▲ Sidewalk Joint Gap
6	Miscellaneous Obstruction	0 EA	6	Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces		0	0	\$ 0.00	■	Miscellaneous Obstruction	◆ Commercial Entrance
7	Missing Sidewalk Obstruction	0 EA	7	Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:				\$ 6900.00	■	Missing Sidewalk Obstruction	◆ Residential Entrance
8	Other Obstruction	0 EA	8	Other Obstruction	0 EA	\$ 500.00	\$ 0.00						■	Other Obstruction	✚ Commercial Entrance (within slope violation)
9	Pole Post Hydrant Obstruction	0 EA	9	Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00						■	Pole Post Hydrant Obstruction	✚ Residential Entrance (within slope violation)
10	Ponding Obstruction	0 EA	10	Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00						■	Ponding Obstruction	
11	Sidewalk Joint Obstruction	0 EA	11	Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00						■	Sidewalk Joint Obstruction	Cross Slope
12	Sign Obstruction	0 EA	12	Sign Obstruction	0 EA	\$ 150.00	\$ 0.00						■	Sign Obstruction	2 - 3%
13	Storm Grate Obstruction	0 EA	13	Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00						■	Storm Grate Obstruction	3.01 - 4%
14	Transit Obstruction	0 EA	14	Transit Obstruction	0 EA	\$500.00	\$ 0.00						■	Transit Obstruction	4.01 - 5%
15	Traffic Obstruction	0 EA	15	Traffic Obstruction	0 EA	\$2000.00	\$ 0.00						■	Traffic Obstruction	5.01% - 6%
16	Tree Obstruction	0 EA	16	Tree Obstruction	0 EA	\$500.00	\$ 0.00						■	Tree Obstruction	6.01 - 7%
17	Utility Obstruction	0 EA	17	Utility Obstruction	0 EA	\$1500.00	\$ 0.00						■	Utility Obstruction	> 12%
18	Vegetation Obstruction - Low	0 EA	18	Vegetation Obstruction - Low	0 EA	\$150.00	\$ 0.00						■	Vegetation Obstruction - Low	Running Slope
19	Vegetation Obstruction - Overhead	0 EA	19	Vegetation Obstruction - Overhead	0 EA	\$150.00	\$ 0.00						■	Vegetation Obstruction - Overhead	5 - 8.33%
20	Commercial Entrance	0 EA	20	Commercial Entrance (within slope violation)	0 EA	\$ 5000.00	\$ 0.00						—	Sidewalk Collection Path	8.34% - 10%
21	Residential Entrance	4 EA	21	Residential Entrance (within slope violation)	4 EA	\$ 3000.00	\$ 12000.00						—	Adjacent Sidewalk Collection Path	10.01 - 12.5%
22	Total Sidewalk Length Assessed	492.188 LF	22	Running Slope Violations**	0 SY	\$ 75.00	\$ 0.00						—	Buried Sidewalk	> 12.5%
23	Average Sidewalk Width	48 IN	23	Cross Slope Violations	78.424 SY	\$ 75.00	\$ 5882.00						—	Sidewalk Not Surveyed	
24	No Sidewalk on Block (Approx.)	474.257 LF	24	Running and Cross Slope Violations	0 SY	\$ 75.00	\$ 0.00						—	Missing Sidewalk Gap	
25	Missing Sidewalk Gaps (Approx.)	0 LF	25	Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00						—	No Sidewalk on Block	
26	Poor Surface Condition (Approx.)	0 LF	26	Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00								
27	Buried Sidewalk (Approx.)	0 LF	27	Buried Sidewalk (Approx.)	0 LF	\$ 41.67	\$ 0.00								
				Sidewalk SubTotal:			\$ 18482.00								

Corridor Total:

\$ 25382.00

■ Curb Ramps - Compliant

■ Curb Ramps - Non Compliant

■ Island Curb Cuts - Compliant

■ Island Curb Cuts - Non Compliant

■ Signals - Compliant

■ Signals - Non Compliant

■ Transit Stops - Compliant

■ Transit Stops - Non Compliant

■ Railroad Crossings - Compliant

■ Railroad Crossings - Non Compliant

■ Accessible Parking - Compliant

■ Accessible Parking - Non Compliant

■ Curb Ramps - Adjacent

■ Island Curb Cuts - Adjacent

■ Signals - Adjacent

■ Transit Stops - Adjacent

■ Railroad Crossings - Adjacent

■ Accessible Parking - Adjacent

● Heavings < 1" (Excluded)***

● Heavings ≥ 1" (Excluded)***

● Uneven Heaving (Excluded)***

— Heaving Clusters (Excluded)

▲ Sidewalk Joint Gap (Excluded)***

■ Miscellaneous Obstruction

■ Missing Sidewalk Obstruction

■ Other Obstruction

■ Pole Post Hydrant Obstruction

■ Ponding Obstruction

■ Sidewalk Joint Obstruction

■ Sign Obstruction

■ Storm Grate Obstruction

■ Transit Obstruction

■ Traffic Obstruction

■ Tree Obstruction

■ Utility Obstruction

■ Vegetation Obstruction - Low

■ Vegetation Obstruction - Overhead

— Sidewalk Collection Path

— Adjacent Sidewalk Collection Path

— Buried Sidewalk

— Sidewalk Not Surveyed

— Missing Sidewalk Gap

— No Sidewalk on Block

● Heavings < 1"

● Heavings ≥ 1"

● Uneven Heaving

— Heaving Clusters

▲ Sidewalk Joint Gap

◆ Commercial Entrance

◆ Residential Entrance

✚ Commercial Entrance (within slope violation)

✚ Residential Entrance (within slope violation)

Cross Slope

2 - 3%

3.01 - 4%

4.01 - 5%

5.01% - 6%

6.01 - 7%

7.01 - 8%

8.01 - 9%

9.01 - 10%

10.01 - 12%

> 12%

Running Slope

5 - 8.33%

8.34% - 10%

10.01 - 12.5%

> 12.5%

*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.

**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.

***Note: Excluded items are violations that occur in areas with slope violations and have been excluded from the cost estimate.