


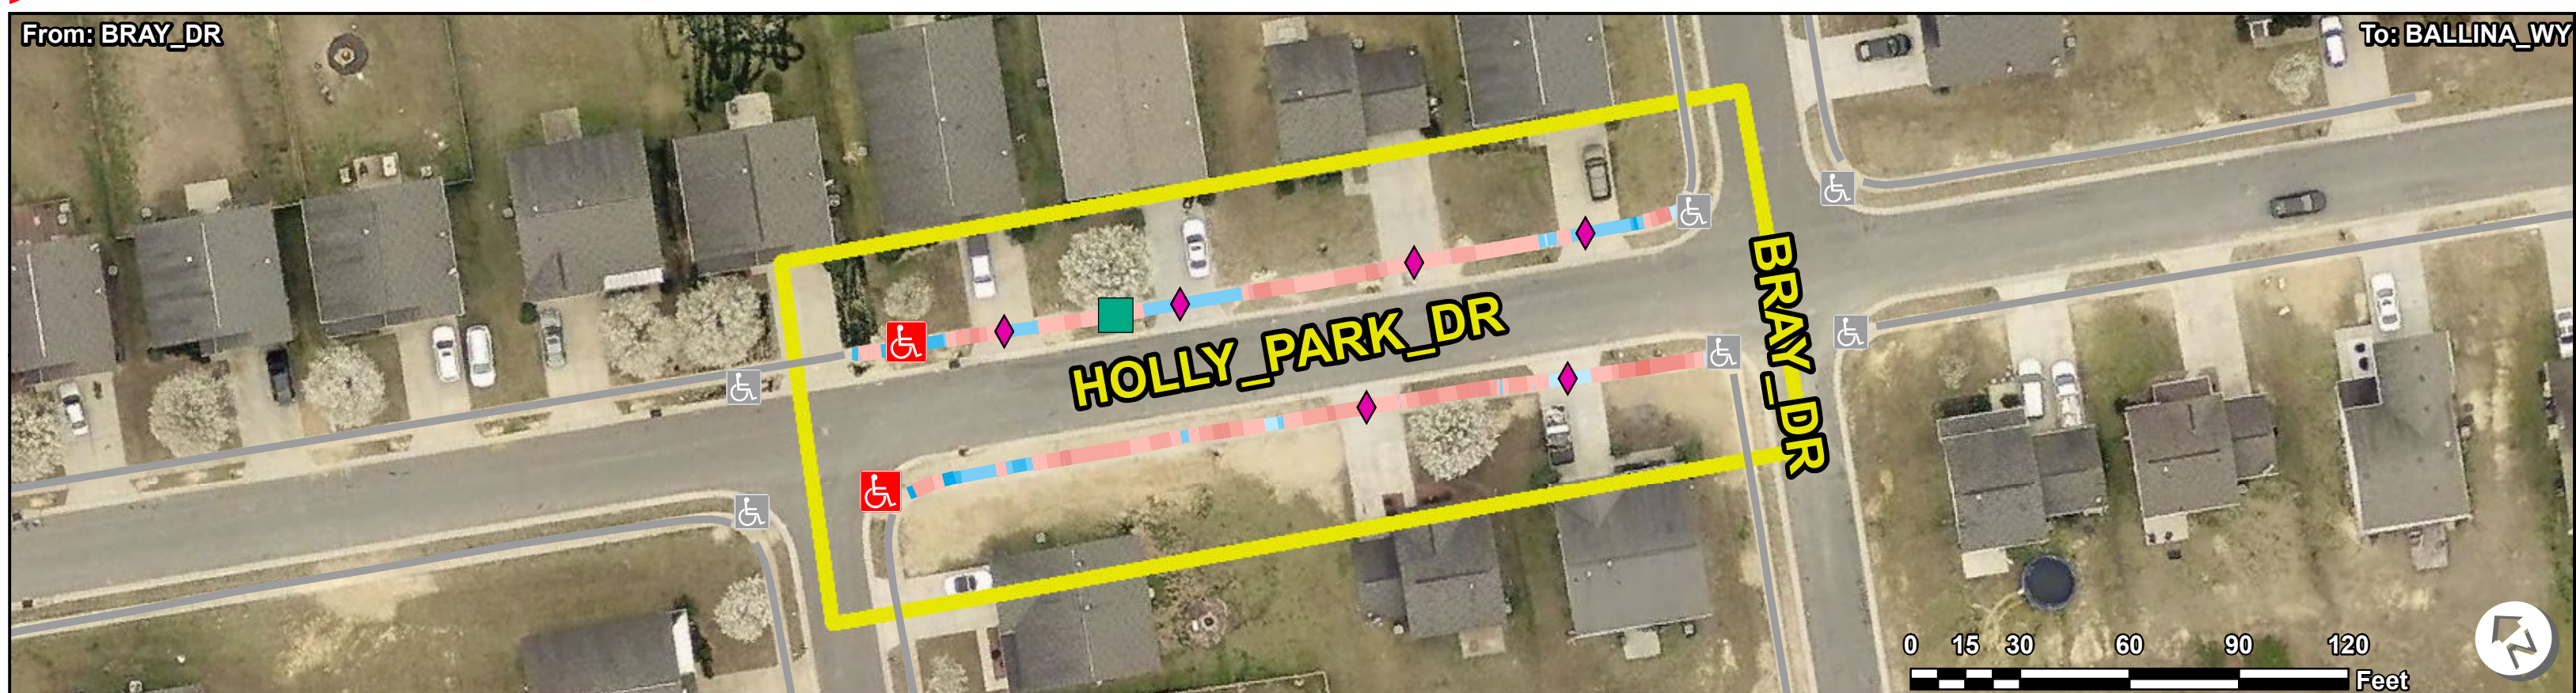

ADA Survey Summary				ADA Compliance Cost Estimate *			
Item Description	Quantity	Item Description	Quantity	Unit Price	Item Cost		
1 Heavings less than 1"	6 EA	1 Heavings less than 1"	6 EA	\$ 100.00	\$ 600.00		
2 Heavings 1" or greater	0 EA	2 Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00		
3 Uneven Heavings	0 EA	3 Uneven Heavings	0 EA	\$ 400.00	\$ 0.00		
4 Heaving Clusters	1.776 SY	4 Heaving Clusters	1.776 SY	\$ 75.00	\$ 133.00		
5 Sidewalk Joint Gaps	0 EA	5 Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00		
6 Miscellaneous Obstruction	0 EA	6 Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00		
7 Missing Sidewalk Obstruction	0 EA	7 Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00		
8 Other Obstruction	0 EA	8 Other Obstruction	0 EA	\$ 500.00	\$ 0.00		
9 Pole Post Hydrant Obstruction	0 EA	9 Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00		
10 Ponding Obstruction	0 EA	10 Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00		
11 Sidewalk Joint Obstruction	0 EA	11 Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00		
12 Sign Obstruction	0 EA	12 Sign Obstruction	0 EA	\$ 150.00	\$ 0.00		
13 Storm Grate Obstruction	0 EA	13 Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00		
14 Transit Obstruction	0 EA	14 Transit Obstruction	0 EA	\$500.00	\$ 0.00		
15 Traffic Obstruction	0 EA	15 Traffic Obstruction	0 EA	\$2000.00	\$ 0.00		
16 Tree Obstruction	0 EA	16 Tree Obstruction	0 EA	\$500.00	\$ 0.00		
17 Utility Obstruction	0 EA	17 Utility Obstruction	0 EA	\$1500.00	\$ 0.00		
18 Vegetation Obstruction - Low	0 EA	18 Vegetation Obstruction - Low	0 EA	\$150.00	\$ 0.00		
19 Vegetation Obstruction - Overhead	1 EA	19 Vegetation Obstruction - Overhead	1 EA	\$150.00	\$ 150.00		
20 Commercial Entrance	0 EA	20 Commercial Entrance (within slope violation)	0 EA	\$ 5000.00	\$ 0.00		
21 Residential Entrance	6 EA	21 Residential Entrance (within slope violation)	0 EA	\$ 3000.00	\$ 0.00		
22 Total Sidewalk Length Assessed	445.512 LF	22 Running Slope Violations**	0 SY	\$ 75.00	\$ 0.00		
23 Average Sidewalk Width	48 IN	23 Cross Slope Violations	0 SY	\$ 75.00	\$ 0.00		
24 No Sidewalk on Block (Approx.)	0 LF	24 Running and Cross Slope Violations	118.452 SY	\$ 75.00	\$ 8884.00		
25 Missing Sidewalk Gaps (Approx.)	0 LF	25 Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00		
26 Poor Surface Condition (Approx.)	0 LF	26 Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00		
27 Buried Sidewalk (Approx.)	0 LF	27 Buried Sidewalk (Approx.)	0 LF	\$ 41.67	\$ 0.00		
		Sidewalk SubTotal:			\$ 9767.00		

Intersection Inventory & Compliance Cost Estimate			
Item Description	Total Count	Non Compliant Count	Cost
Curb Ramps	2	2	\$ 4700.00
Island Curb Cuts	0	0	\$ 0.00
Signal Push Buttons	0	0	\$ 0.00
Transit Stops	0	0	\$ 0.00
Railroad Crossings	0	0	\$ 0.00
Accessible Parking Spaces	0	0	\$ 0.00
Intersection SubTotal:			\$ 4700.00

Corridor Total:

\$ 14467.00

 Curb Ramps - Compliant

 Curb Ramps - Non Compliant

 Island Curb Cuts - Compliant

 Island Curb Cuts - Non Compliant

 Signals - Compliant

 Signals - Non Compliant

 Transit Stops - Compliant

 Transit Stops - Non Compliant

 Railroad Crossings - Compliant

 Railroad Crossings - Non Compliant

 Accessible Parking - Compliant

 Accessible Parking - Non Compliant

Curb Ramps - Adjacent

Island Curb Cuts - Adjacent

Signals - Adjacent

Transit Stops - Adjacent

Railroad Crossings - Adjacent

Accessible Parking - Adjacent

 Heavings < 1" (Excluded)***

 Heavings ≥ 1" (Excluded)***

 Uneven Heaving (Excluded)***

 Heaving Clusters (Excluded)

 Sidewalk Joint Gap (Excluded)***

 Miscellaneous Obstruction

 Missing Sidewalk Obstruction

 Other Obstruction

 Pole Post Hydrant Obstruction

 Ponding Obstruction

 Sidewalk Joint Obstruction

 Sign Obstruction

 Storm Grate Obstruction

 Transit Obstruction

 Traffic Obstruction

 Tree Obstruction

 Utility Obstruction

 Vegetation Obstruction - Low

 Vegetation Obstruction - Overhead

 Sidewalk Collection Path

 Adjacent Sidewalk Collection Path

 Buried Sidewalk

 Sidewalk Not Surveyed

 Missing Sidewalk Gap

 No Sidewalk on Block

Cross Slope

2 - 3%

7.01 - 8%

3.01 - 4%

8.01 - 9%

4.01 - 5%

9.01 - 10%

5.01% - 6%

10.01 - 12%

6.01 - 7%

> 12%

Running Slope

5 - 8.33%

<