


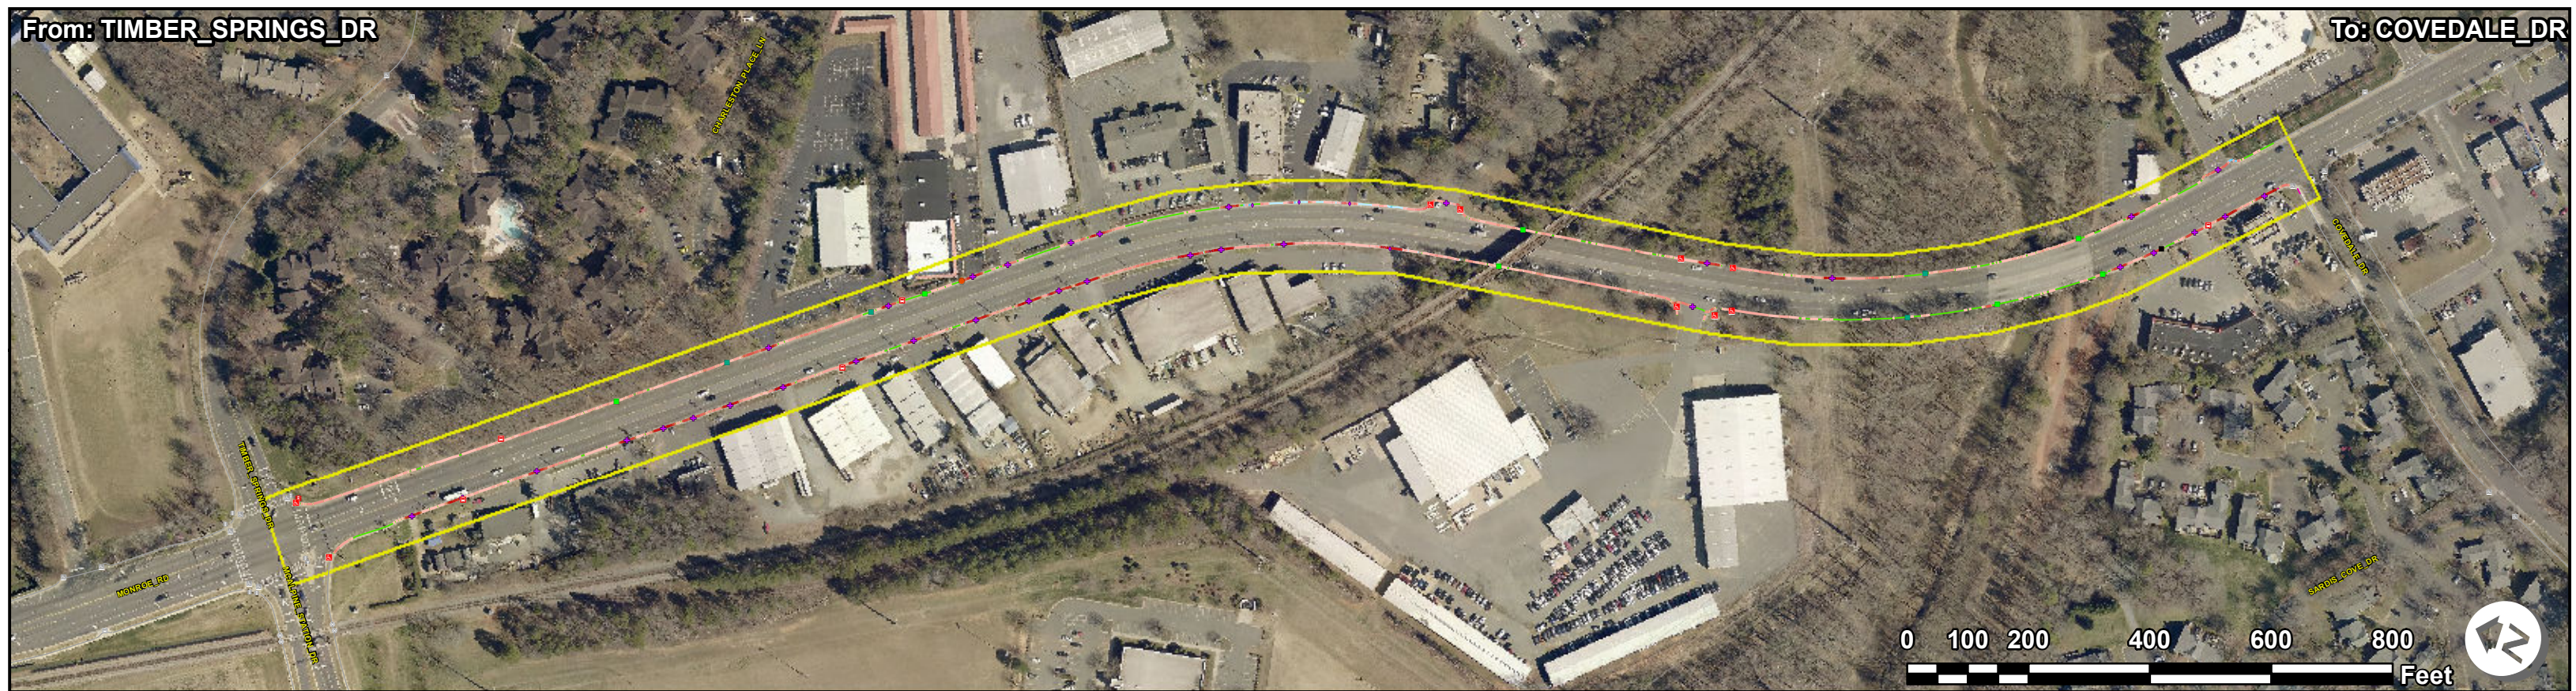

ADA Survey Summary				ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate							
Item Description	Quantity	Item Description	Quantity	Unit Price	Item Cost	Item Description	Total Count	Non Compliant Count	Cost						
1 Heavings less than 1"	113 EA	1 Heavings less than 1"	24 EA	\$ 100.00	\$ 2400.00	Curb Ramps	9	9	\$ 18900.00	● Heavings < 1" (Excluded)***	● Heavings < 1"				
2 Heavings 1" or greater	8 EA	2 Heavings 1" or greater	2 EA	\$ 400.00	\$ 800.00	Island Curb Cuts	0	0	\$ 0.00	● Heavings ≥ 1" (Excluded)***	● Heavings ≥ 1"				
3 Uneven Heavings	1 EA	3 Uneven Heavings	1 EA	\$ 400.00	\$ 400.00	Signal Push Buttons	1	1	\$ 700.00	● Uneven Heaving (Excluded)***	● Uneven Heaving				
4 Heaving Clusters	30.133 SY	4 Heaving Clusters	4.785 SY	\$ 75.00	\$ 359.00	Transit Stops	5	5	\$ 17050.00	— Heaving Clusters (Excluded)	— Heaving Clusters				
5 Sidewalk Joint Gaps	0 EA	5 Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings	0	0	\$ 0.00	▲ Sidewalk Joint Gap (Excluded)***	▲ Sidewalk Joint Gap				
6 Miscellaneous Obstruction	0 EA	6 Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces	0	0	\$ 0.00	■ Miscellaneous Obstruction	■ Miscellaneous Obstruction				
7 Missing Sidewalk Obstruction	0 EA	7 Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:			\$ 36650.00	■ Missing Sidewalk Obstruction	■ Missing Sidewalk Obstruction				
8 Other Obstruction	0 EA	8 Other Obstruction	0 EA	\$ 500.00	\$ 0.00					■ Other Obstruction	■ Other Obstruction				
9 Pole Post Hydrant Obstruction	0 EA	9 Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00					■ Pole Post Hydrant Obstruction	■ Pole Post Hydrant Obstruction				
10 Ponding Obstruction	0 EA	10 Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00					■ Ponding Obstruction	■ Ponding Obstruction				
11 Sidewalk Joint Obstruction	0 EA	11 Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00					■ Sidewalk Joint Obstruction	■ Sidewalk Joint Obstruction				
12 Sign Obstruction	0 EA	12 Sign Obstruction	0 EA	\$ 150.00	\$ 0.00					■ Sign Obstruction	■ Sign Obstruction				
13 Storm Grate Obstruction	0 EA	13 Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00					■ Storm Grate Obstruction	■ Storm Grate Obstruction				
14 Transit Obstruction	0 EA	14 Transit Obstruction	0 EA	\$500.00	\$ 0.00					■ Transit Obstruction	■ Transit Obstruction				
15 Traffic Obstruction	0 EA	15 Traffic Obstruction	0 EA	\$2000.00	\$ 0.00					■ Traffic Obstruction	■ Traffic Obstruction				
16 Tree Obstruction	0 EA	16 Tree Obstruction	0 EA	\$500.00	\$ 0.00					■ Tree Obstruction	■ Tree Obstruction				
17 Utility Obstruction	1 EA	17 Utility Obstruction	1 EA	\$1500.00	\$ 1500.00					■ Utility Obstruction	■ Utility Obstruction				
18 Vegetation Obstruction - Low	7 EA	18 Vegetation Obstruction - Low	7 EA	\$150.00	\$ 1050.00					■ Vegetation Obstruction - Low	■ Vegetation Obstruction - Low				
19 Vegetation Obstruction - Overhead	4 EA	19 Vegetation Obstruction - Overhead	4 EA	\$150.00	\$ 600.00					■ Vegetation Obstruction - Overhead	■ Vegetation Obstruction - Overhead				
20 Commercial Entrance	39 EA	20 Commercial Entrance (within slope violation)	35 EA	\$ 5000.00	\$ 175000.00					— Sidewalk Collection Path	— Sidewalk Collection Path				
21 Residential Entrance	0 EA	21 Residential Entrance (within slope violation)	0 EA	\$ 3000.00	\$ 0.00					— Adjacent Sidewalk Collection Path	— Adjacent Sidewalk Collection Path				
22 Total Sidewalk Length Assessed	6694.731 LF	22 Running Slope Violations**	0 SY	\$ 75.00	\$ 0.00					— Buried Sidewalk	— Buried Sidewalk				
23 Average Sidewalk Width	59.667 IN	23 Cross Slope Violations	2138.476 SY	\$ 75.00	\$ 160386.00					— Sidewalk Not Surveyed	— Sidewalk Not Surveyed				
24 No Sidewalk on Block (Approx.)	0 LF	24 Running and Cross Slope Violations	260.546 SY	\$ 75.00	\$ 19541.00					— Missing Sidewalk Gap	— Missing Sidewalk Gap				
25 Missing Sidewalk Gaps (Approx.)	14.877 LF	25 Missing Sidewalk Gaps (Approx.)	14.877 LF	\$ 41.67	\$ 660.00					— No Sidewalk on Block	— No Sidewalk on Block				
26 Poor Surface Condition (Approx.)	0 LF	26 Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00										
27 Buried Sidewalk (Approx.)	0 LF	27 Buried Sidewalk (Approx.)	0 LF	\$ 41.67	\$ 0.00										
		Sidewalk SubTotal:			\$ 362036.00										

Corridor Total:

\$ 399346.00

■ Curb Ramps - Compliant

■ Curb Ramps - Non Compliant

▲ Island Curb Cuts - Compliant

▲ Island Curb Cuts - Non Compliant

■ Signals - Compliant

■ Signals - Non Compliant

■ Transit Stops - Compliant

■ Transit Stops - Non Compliant

■ Railroad Crossings - Compliant

■ Railroad Crossings - Non Compliant

■ Accessible Parking - Compliant

■ Accessible Parking - Non Compliant

■ Curb Ramps - Adjacent

▲ Island Curb Cuts - Adjacent

■ Signals - Adjacent

■ Transit Stops - Adjacent

■ Railroad Crossings - Adjacent

■ Accessible Parking - Adjacent

Cross Slope

2 - 3% 3.01 - 4% 4.01 - 5% 5.01% - 6% 6.01 - 7% 7.01 - 8% 8.01 - 9% 9.01 - 10% 10.01 - 12% > 12%

Running Slope

5 - 8.33% 8.34% - 10% 10.01 - 12.5% > 12.5%

*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.

**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.

***Note: Excluded items are violations that occur in areas with slope violations and have been excluded from the cost estimate.