


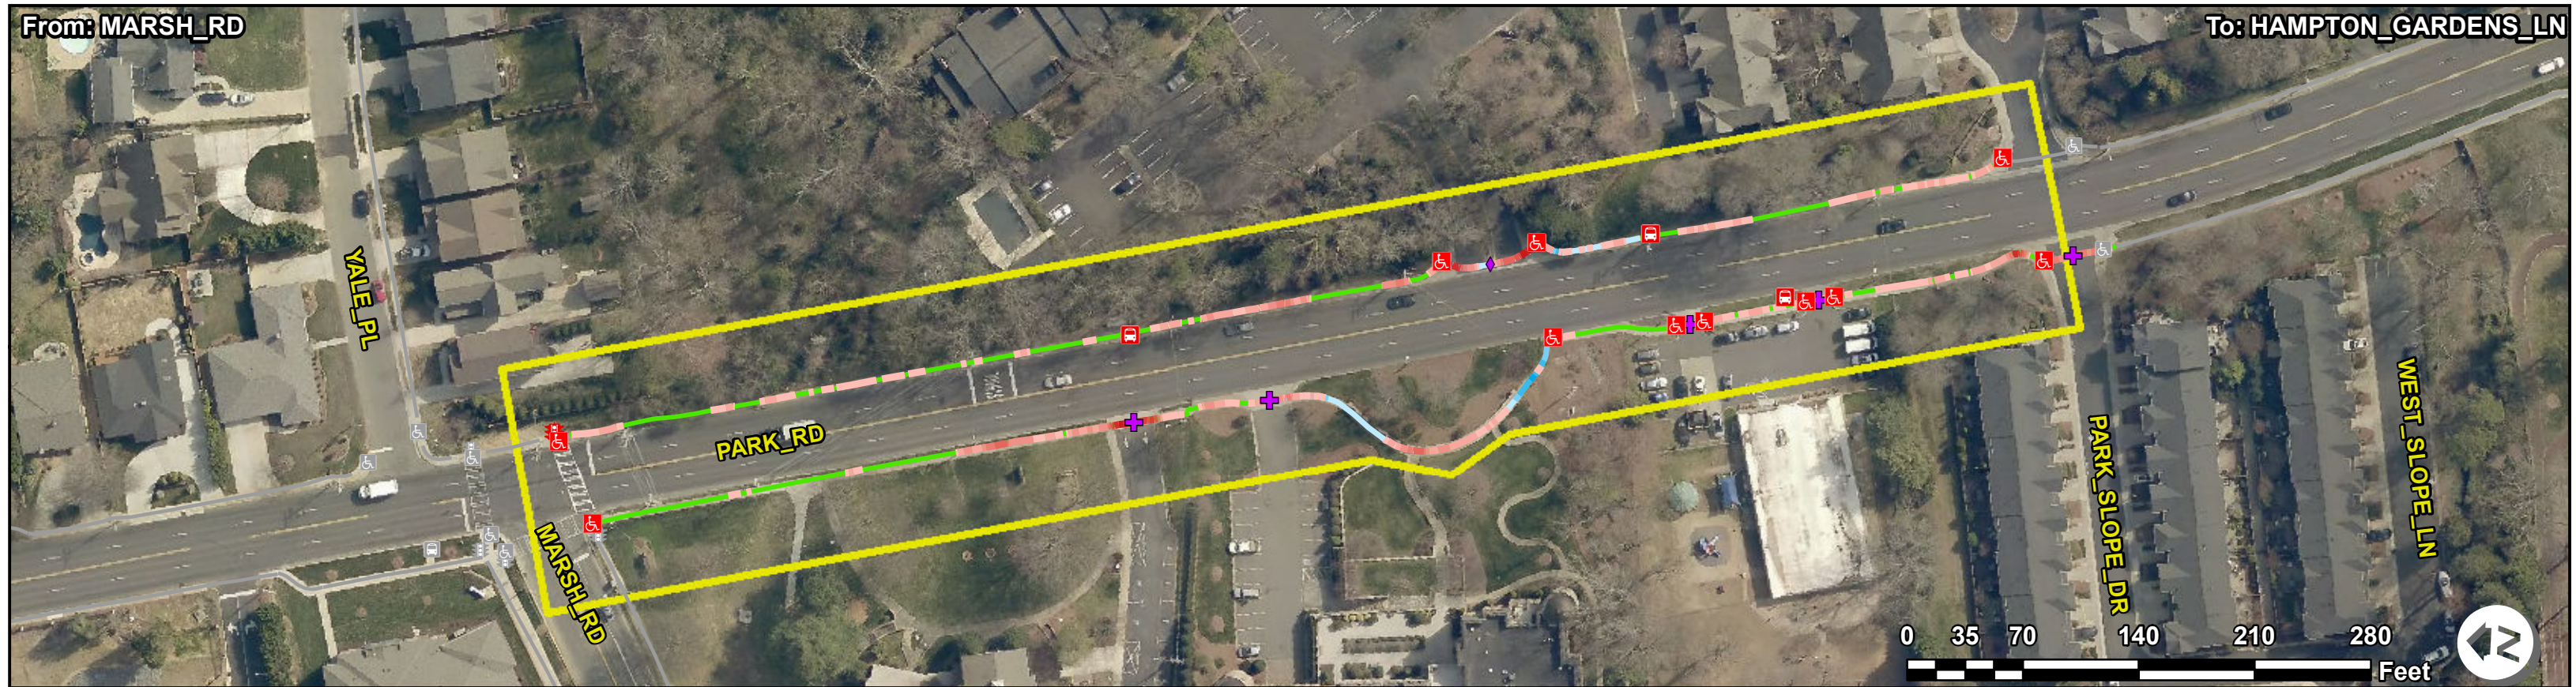

ADA Survey Summary			ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate				Corridor Total:			
Item Description	Quantity		Item Description	Quantity	Unit Price	Item Cost	Item Description	Total Count	Non Compliant Count	Cost				
1 Heavings less than 1"	19 EA		1 Heavings less than 1"	10 EA	\$ 100.00	\$ 1000.00	Curb Ramps	11	11	\$ 29100.00	● Heavings < 1" (Excluded)***	● Heavings < 1"		
2 Heavings 1" or greater	0 EA		2 Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00	Island Curb Cuts	0	0	\$ 0.00	● Heavings ≥ 1" (Excluded)***	● Heavings ≥ 1"		
3 Uneven Heavings	0 EA		3 Uneven Heavings	0 EA	\$ 400.00	\$ 0.00	Signal Push Buttons	1	1	\$ 650.00	● Uneven Heaving (Excluded)***	● Uneven Heaving		
4 Heaving Clusters	4.77 SY		4 Heaving Clusters	2.219 SY	\$ 75.00	\$ 166.00	Transit Stops	3	3	\$ 6850.00	● Heaving Clusters (Excluded)	● Heaving Clusters		
5 Sidewalk Joint Gaps	0 EA		5 Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings	0	0	\$ 0.00	▲ Sidewalk Joint Gap (Excluded)***	▲ Sidewalk Joint Gap		
6 Miscellaneous Obstruction	0 EA		6 Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces	0	0	\$ 0.00	■ Miscellaneous Obstruction	◆ Commercial Entrance		
7 Missing Sidewalk Obstruction	0 EA		7 Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:		\$ 36600.00		■ Missing Sidewalk Obstruction	◆ Residential Entrance		
8 Other Obstruction	0 EA		8 Other Obstruction	0 EA	\$ 500.00	\$ 0.00					■ Other Obstruction	◆ Commercial Entrance (within slope violation)		
9 Pole Post Hydrant Obstruction	0 EA		9 Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00					■ Pole Post Hydrant Obstruction	◆ Residential Entrance (within slope violation)		
10 Ponding Obstruction	0 EA		10 Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00					■ Ponding Obstruction			
11 Sidewalk Joint Obstruction	0 EA		11 Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00					■ Sidewalk Joint Obstruction	Cross Slope		
12 Sign Obstruction	0 EA		12 Sign Obstruction	0 EA	\$ 150.00	\$ 0.00					■ Sign Obstruction	2 - 3%	7.01 - 8%	
13 Storm Grate Obstruction	0 EA		13 Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00					■ Storm Grate Obstruction	3.01 - 4%	8.01 - 9%	
14 Transit Obstruction	0 EA		14 Transit Obstruction	0 EA	\$500.00	\$ 0.00					■ Transit Obstruction	4.01 - 5%	9.01 - 10%	
15 Traffic Obstruction	0 EA		15 Traffic Obstruction	0 EA	\$2000.00	\$ 0.00					■ Traffic Obstruction	5.01% - 6%	10.01 - 12%	
16 Tree Obstruction	0 EA		16 Tree Obstruction	0 EA	\$500.00	\$ 0.00					■ Tree Obstruction	6.01 - 7%	> 12%	
17 Utility Obstruction	0 EA		17 Utility Obstruction	0 EA	\$1500.00	\$ 0.00					■ Utility Obstruction	Running Slope		
18 Vegetation Obstruction - Low	0 EA		18 Vegetation Obstruction - Low	0 EA	\$150.00	\$ 0.00					■ Vegetation Obstruction - Low	5 - 8.33%		
19 Vegetation Obstruction - Overhead	0 EA		19 Vegetation Obstruction - Overhead	0 EA	\$150.00	\$ 0.00					■ Vegetation Obstruction - Overhead	8.34% - 10%		
20 Commercial Entrance	6 EA		20 Commercial Entrance (within slope violation)	5 EA	\$ 5000.00	\$ 25000.00					■ Sidewalk Collection Path	10.01 - 12.5%		
21 Residential Entrance	0 EA		21 Residential Entrance (within slope violation)	0 EA	\$ 3000.00	\$ 0.00					■ Adjacent Sidewalk Collection Path	> 12.5%		
22 Total Sidewalk Length Assessed	1839.667 LF		22 Running Slope Violations**	45.247 SY	\$ 75.00	\$ 3394.00					■ Buried Sidewalk			
23 Average Sidewalk Width	62 IN		23 Cross Slope Violations	460.54 SY	\$ 75.00	\$ 34541.00					■ Sidewalk Not Surveyed			
24 No Sidewalk on Block (Approx.)	0 LF		24 Running and Cross Slope Violations	69.545 SY	\$ 75.00	\$ 5216.00					■ Missing Sidewalk Gap			
25 Missing Sidewalk Gaps (Approx.)	0 LF		25 Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00					■ No Sidewalk on Block			
26 Poor Surface Condition (Approx.)	0 LF		26 Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00								
27 Buried Sidewalk (Approx.)	0 LF		27 Buried Sidewalk (Approx.)	0 LF	\$ 41.67	\$ 0.00								
			Sidewalk SubTotal:			\$ 69316.00								
*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.														
**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.														
***Note: Excluded items are violations that occur in areas with slope violations and have been excluded from the cost estimate.														