


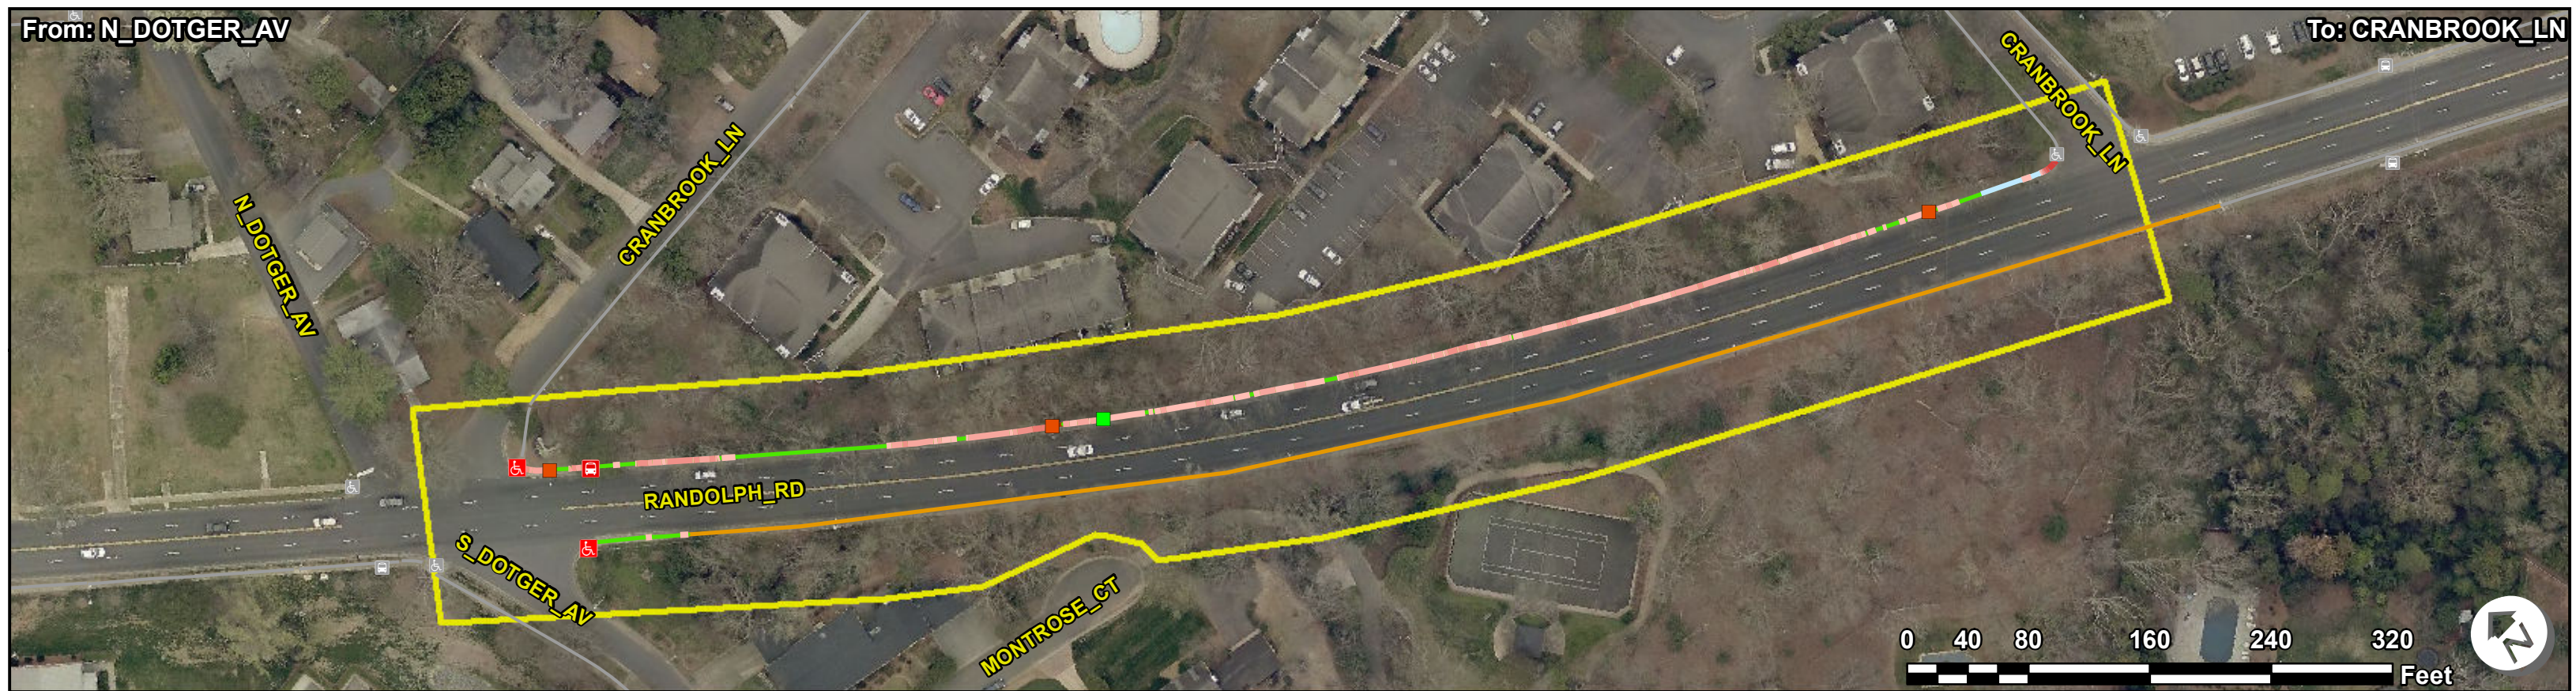

ADA Survey Summary		ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate								
Item	Description	Quantity	Item	Description	Quantity	Unit Price	Item Cost	Item	Description	Total Count	Non Compliant Count	Cost		
1	Heavings less than 1"	15 EA	1	Heavings less than 1"	4 EA	\$ 100.00	\$ 400.00	Curb Ramps		2	2	\$ 7150.00	● Heavings < 1" (Excluded)***	
2	Heavings 1" or greater	0 EA	2	Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00	Island Curb Cuts		0	0	\$ 0.00	● Heavings ≥ 1" (Excluded)***	
3	Uneven Heavings	0 EA	3	Uneven Heavings	0 EA	\$ 400.00	\$ 0.00	Signal Push Buttons		0	0	\$ 0.00	● Uneven Heaving (Excluded)***	
4	Heaving Clusters	1.776 SY	4	Heaving Clusters	1.776 SY	\$ 75.00	\$ 133.00	Transit Stops		1	1	\$ 1450.00	— Heaving Clusters (Excluded)	
5	Sidewalk Joint Gaps	0 EA	5	Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings		0	0	\$ 0.00	▲ Sidewalk Joint Gap (Excluded)***	
6	Miscellaneous Obstruction	0 EA	6	Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces		0	0	\$ 0.00	■ Miscellaneous Obstruction	
7	Missing Sidewalk Obstruction	0 EA	7	Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:				\$ 8600.00	■ Missing Sidewalk Obstruction	
8	Other Obstruction	0 EA	8	Other Obstruction	0 EA	\$ 500.00	\$ 0.00	Corridor Total: \$ 50808.00 ■ Curb Ramps - Compliant ■ Curb Ramps - Non Compliant ■ Island Curb Cuts - Compliant ■ Island Curb Cuts - Non Compliant ■ Signals - Compliant ■ Signals - Non Compliant ■ Transit Stops - Compliant ■ Transit Stops - Non Compliant ■ Railroad Crossings - Compliant ■ Railroad Crossings - Non Compliant ■ Accessible Parking - Compliant ■ Accessible Parking - Non Compliant ■ Curb Ramps - Adjacent ■ Island Curb Cuts - Adjacent ■ Signals - Adjacent ■ Transit Stops - Adjacent ■ Railroad Crossings - Adjacent ■ Accessible Parking - Adjacent						■ Other Obstruction
9	Pole Post Hydrant Obstruction	3 EA	9	Pole Post Hydrant Obstruction	3 EA	\$ 5000.00	\$ 15000.00							■ Pole Post Hydrant Obstruction
10	Ponding Obstruction	0 EA	10	Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00							■ Ponding Obstruction
11	Sidewalk Joint Obstruction	0 EA	11	Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00							■ Sidewalk Joint Obstruction
12	Sign Obstruction	0 EA	12	Sign Obstruction	0 EA	\$ 150.00	\$ 0.00							■ Sign Obstruction
13	Storm Grate Obstruction	0 EA	13	Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00							■ Storm Grate Obstruction
14	Transit Obstruction	0 EA	14	Transit Obstruction	0 EA	\$500.00	\$ 0.00							■ Transit Obstruction
15	Traffic Obstruction	0 EA	15	Traffic Obstruction	0 EA	\$2000.00	\$ 0.00							■ Traffic Obstruction
16	Tree Obstruction	0 EA	16	Tree Obstruction	0 EA	\$500.00	\$ 0.00							■ Tree Obstruction
17	Utility Obstruction	0 EA	17	Utility Obstruction	0 EA	\$1500.00	\$ 0.00							■ Utility Obstruction
18	Vegetation Obstruction - Low	1 EA	18	Vegetation Obstruction - Low	1 EA	\$150.00	\$ 150.00	■ Vegetation Obstruction - Low						
19	Vegetation Obstruction - Overhead	0 EA	19	Vegetation Obstruction - Overhead	0 EA	\$150.00	\$ 0.00	■ Vegetation Obstruction - Overhead						
20	Commercial Entrance	0 EA	20	Commercial Entrance (within slope violation)	0 EA	\$ 5000.00	\$ 0.00	■ Commercial Entrance						
21	Residential Entrance	0 EA	21	Residential Entrance (within slope violation)	0 EA	\$ 3000.00	\$ 0.00	■ Residential Entrance						
22	Total Sidewalk Length Assessed	1077.674 LF	22	Running Slope Violations**	0 SY	\$ 75.00	\$ 0.00	Cross Slope ■ 2 - 3% ■ 3.01 - 4% ■ 4.01 - 5% ■ 5.01% - 6% ■ 6.01 - 7% ■ 7.01 - 8% ■ 8.01 - 9% ■ 9.01 - 10% ■ 10.01 - 12% ■ > 12% Running Slope ■ 5 - 8.33% ■ 8.34% - 10% ■ 10.01 - 12.5% ■ > 12.5%						
23	Average Sidewalk Width	48 IN	23	Cross Slope Violations	344.718 SY	\$ 75.00	\$ 25854.00							
24	No Sidewalk on Block (Approx.)	0 LF	24	Running and Cross Slope Violations	8.943 SY	\$ 75.00	\$ 671.00							
25	Missing Sidewalk Gaps (Approx.)	0 LF	25	Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00							
26	Poor Surface Condition (Approx.)	0 LF	26	Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00							
27	Buried Sidewalk (Approx.)	1035.282 LF	27	Buried Sidewalk (Approx.)	1035.282 LF	\$ 41.67	\$ 43120.00							
			Sidewalk SubTotal:				\$ 42208.00							

*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.

**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.