


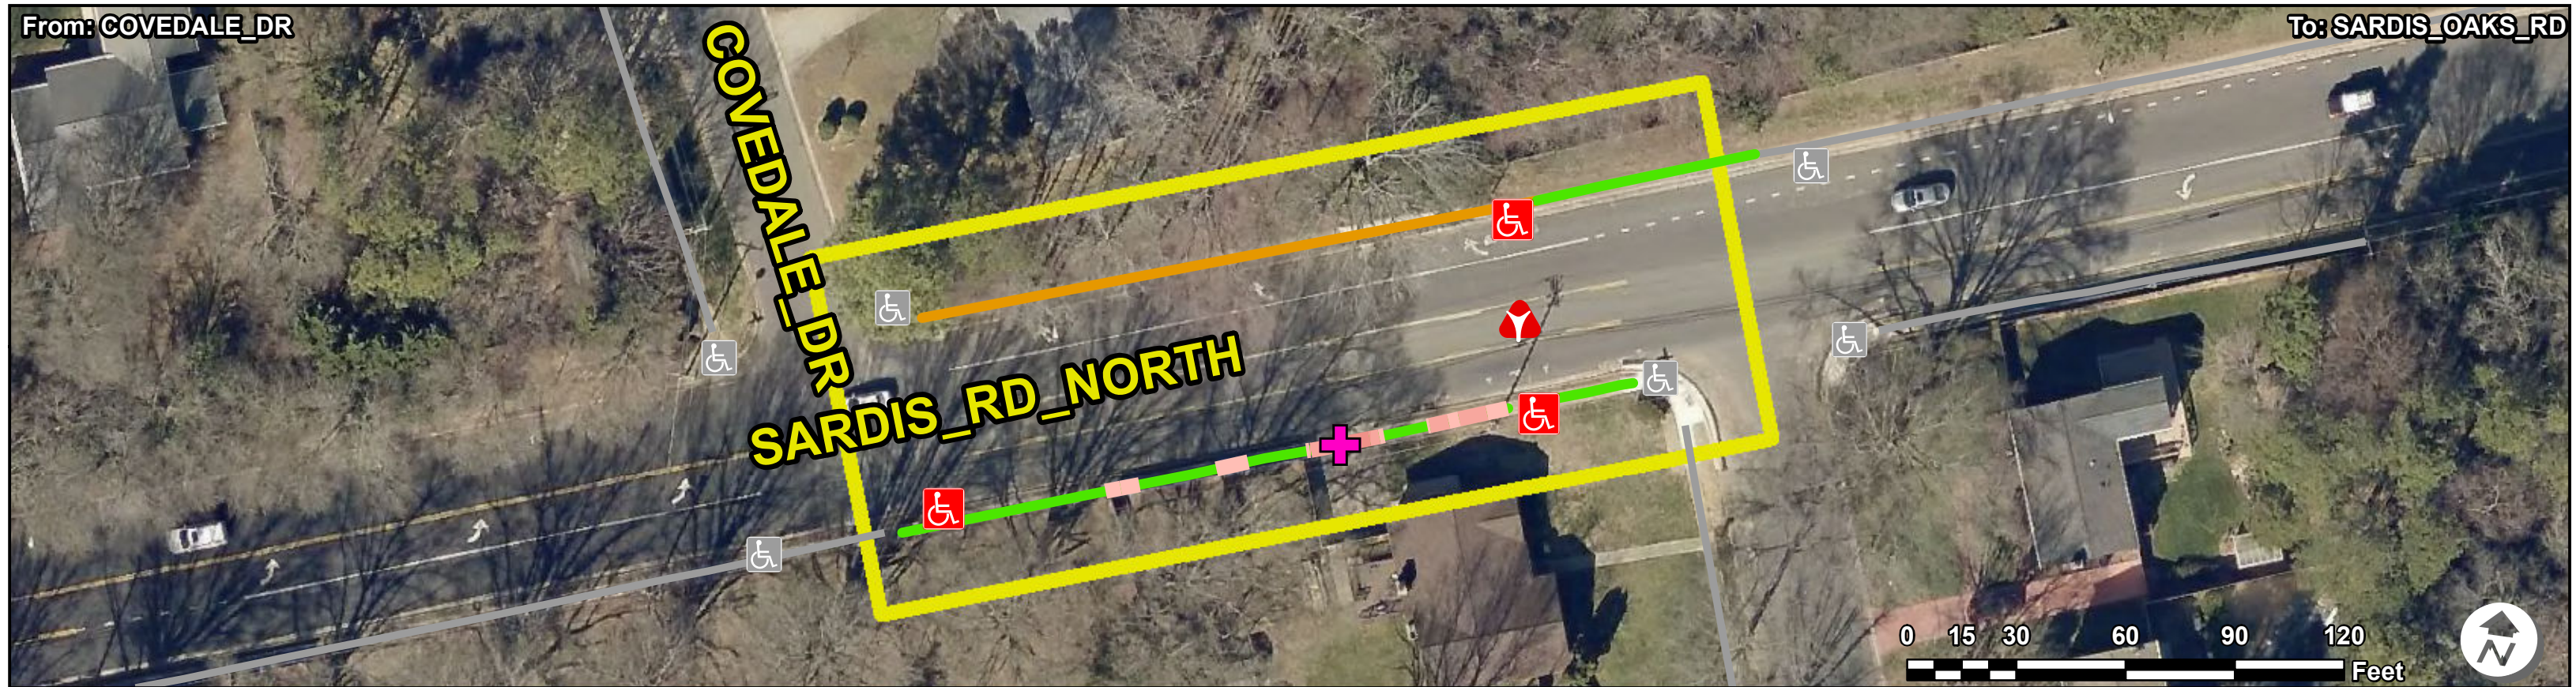

ADA Survey Summary			ADA Compliance Cost Estimate *			Intersection Inventory & Compliance Cost Estimate									
Item	Description	Quantity	Item	Description	Quantity	Unit Price	Item Cost	Item Description	Total Count	Non Compliant Count	Cost				
1	Heavings less than 1"	5 EA	1	Heavings less than 1"	4 EA	\$ 100.00	\$ 400.00	Curb Ramps	3	3	\$ 4700.00	●	Heavings < 1" (Excluded)***	●	Heavings < 1"
2	Heavings 1" or greater	0 EA	2	Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00	Island Curb Cuts	1	1	\$ 750.00	●	Heavings ≥ 1" (Excluded)***	●	Heavings ≥ 1"
3	Uneven Heavings	0 EA	3	Uneven Heavings	0 EA	\$ 400.00	\$ 0.00	Signal Push Buttons	0	0	\$ 0.00	●	Uneven Heaving (Excluded)***	●	Uneven Heaving
4	Heaving Clusters	0 SY	4	Heaving Clusters	0 SY	\$ 75.00	\$ 0.00	Transit Stops	0	0	\$ 0.00	—	Heaving Clusters (Excluded)	—	Heaving Clusters
5	Sidewalk Joint Gaps	0 EA	5	Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings	0	0	\$ 0.00	▲	Sidewalk Joint Gap (Excluded)***	▲	Sidewalk Joint Gap
6	Miscellaneous Obstruction	0 EA	6	Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces	0	0	\$ 0.00	■	Miscellaneous Obstruction	◆	Commercial Entrance
7	Missing Sidewalk Obstruction	0 EA	7	Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:			\$ 5450.00	■	Missing Sidewalk Obstruction	◆	Residential Entrance
8	Other Obstruction	0 EA	8	Other Obstruction	0 EA	\$ 500.00	\$ 0.00					■	Other Obstruction	✚	Commercial Entrance (within slope violation)
9	Pole Post Hydrant Obstruction	0 EA	9	Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00					■	Pole Post Hydrant Obstruction	✚	Residential Entrance (within slope violation)
10	Ponding Obstruction	0 EA	10	Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00					■	Ponding Obstruction		
11	Sidewalk Joint Obstruction	0 EA	11	Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00					■	Sidewalk Joint Obstruction	2 - 3%	7.01 - 8%
12	Sign Obstruction	0 EA	12	Sign Obstruction	0 EA	\$ 150.00	\$ 0.00					■	Sign Obstruction	3.01 - 4%	8.01 - 9%
13	Storm Grate Obstruction	0 EA	13	Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00					■	Storm Grate Obstruction	4.01 - 5%	9.01 - 10%
14	Transit Obstruction	0 EA	14	Transit Obstruction	0 EA	\$500.00	\$ 0.00					■	Transit Obstruction	5.01% - 6%	10.01 - 12%
15	Traffic Obstruction	0 EA	15	Traffic Obstruction	0 EA	\$2000.00	\$ 0.00					■	Traffic Obstruction	6.01 - 7%	> 12%
16	Tree Obstruction	0 EA	16	Tree Obstruction	0 EA	\$500.00	\$ 0.00					■	Tree Obstruction		
17	Utility Obstruction	0 EA	17	Utility Obstruction	0 EA	\$1500.00	\$ 0.00					■	Utility Obstruction	5 - 8.33%	
18	Vegetation Obstruction - Low	0 EA	18	Vegetation Obstruction - Low	0 EA	\$150.00	\$ 0.00					■	Vegetation Obstruction - Low	8.34% - 10%	
19	Vegetation Obstruction - Overhead	0 EA	19	Vegetation Obstruction - Overhead	0 EA	\$150.00	\$ 0.00					■	Vegetation Obstruction - Overhead	10.01 - 12.5%	
20	Commercial Entrance	0 EA	20	Commercial Entrance (within slope violation)	0 EA	\$ 5000.00	\$ 0.00					—	Sidewalk Collection Path	> 12.5%	
21	Residential Entrance	1 EA	21	Residential Entrance (within slope violation)	1 EA	\$ 3000.00	\$ 3000.00					—	Adjacent Sidewalk Collection Path		
22	Total Sidewalk Length Assessed	253.522 LF	22	Running Slope Violations**	0 SY	\$ 75.00	\$ 0.00					—	Buried Sidewalk		
23	Average Sidewalk Width	52 IN	23	Cross Slope Violations	20.696 SY	\$ 75.00	\$ 1552.00					—	Sidewalk Not Surveyed		
24	No Sidewalk on Block (Approx.)	0 LF	24	Running and Cross Slope Violations	0 SY	\$ 75.00	\$ 0.00					—	Missing Sidewalk Gap		
25	Missing Sidewalk Gaps (Approx.)	0 LF	25	Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00					—	No Sidewalk on Block		
26	Poor Surface Condition (Approx.)	0 LF	26	Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00								
27	Buried Sidewalk (Approx.)	171.791 LF	27	Buried Sidewalk (Approx.)	171.791 LF	\$ 41.67	\$ 7260.00								
				Sidewalk SubTotal:			\$ 4952.00								

Corridor Total:

\$ 10402.00

■ Curb Ramps - Compliant

■ Curb Ramps - Non Compliant

▲ Island Curb Cuts - Compliant

▲ Island Curb Cuts - Non Compliant

■ Signals - Compliant

■ Signals - Non Compliant

■ Transit Stops - Compliant

■ Transit Stops - Non Compliant

■ Railroad Crossings - Compliant

■ Railroad Crossings - Non Compliant

■ Accessible Parking - Compliant

■ Accessible Parking - Non Compliant

■ Curb Ramps - Adjacent

▲ Island Curb Cuts - Adjacent

■ Signals - Adjacent

■ Transit Stops - Adjacent

■ Railroad Crossings - Adjacent

■ Accessible Parking - Adjacent

● Heavings < 1" (Excluded)***

● Heavings ≥ 1" (Excluded)***

● Uneven Heaving (Excluded)***

— Heaving Clusters (Excluded)

▲ Sidewalk Joint Gap (Excluded)***

■ Miscellaneous Obstruction

■ Missing Sidewalk Obstruction

■ Other Obstruction

■ Pole Post Hydrant Obstruction

■ Ponding Obstruction

■ Sidewalk Joint Obstruction

■ Sign Obstruction

■ Storm Grate Obstruction

■ Transit Obstruction

■ Traffic Obstruction

■ Tree Obstruction

■ Utility Obstruction

■ Vegetation Obstruction - Low

■ Vegetation Obstruction - Overhead

— Sidewalk Collection Path

— Adjacent Sidewalk Collection Path

— Buried Sidewalk

— Sidewalk Not Surveyed

— Missing Sidewalk Gap

— No Sidewalk on Block

● Heavings < 1"

● Heavings ≥ 1"

● Uneven Heaving

— Heaving Clusters

▲ Sidewalk Joint Gap

◆ Commercial Entrance

◆ Residential Entrance

✚ Commercial Entrance (within slope violation)

✚ Residential Entrance (within slope violation)

Cross Slope

2 - 3% 7.01 - 8%

3.01 - 4% 8.01 - 9%

4.01 - 5% 9.01 - 10%

5.01% - 6% 10.01 - 12%

6.01 - 7% > 12%

Running Slope

5 - 8.33%

8.34% - 10%

10.01 - 12.5%

> 12.5%

*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.

**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.

***Note: Excluded items are violations that occur in areas with slope violations and have been excluded from the cost estimate.