


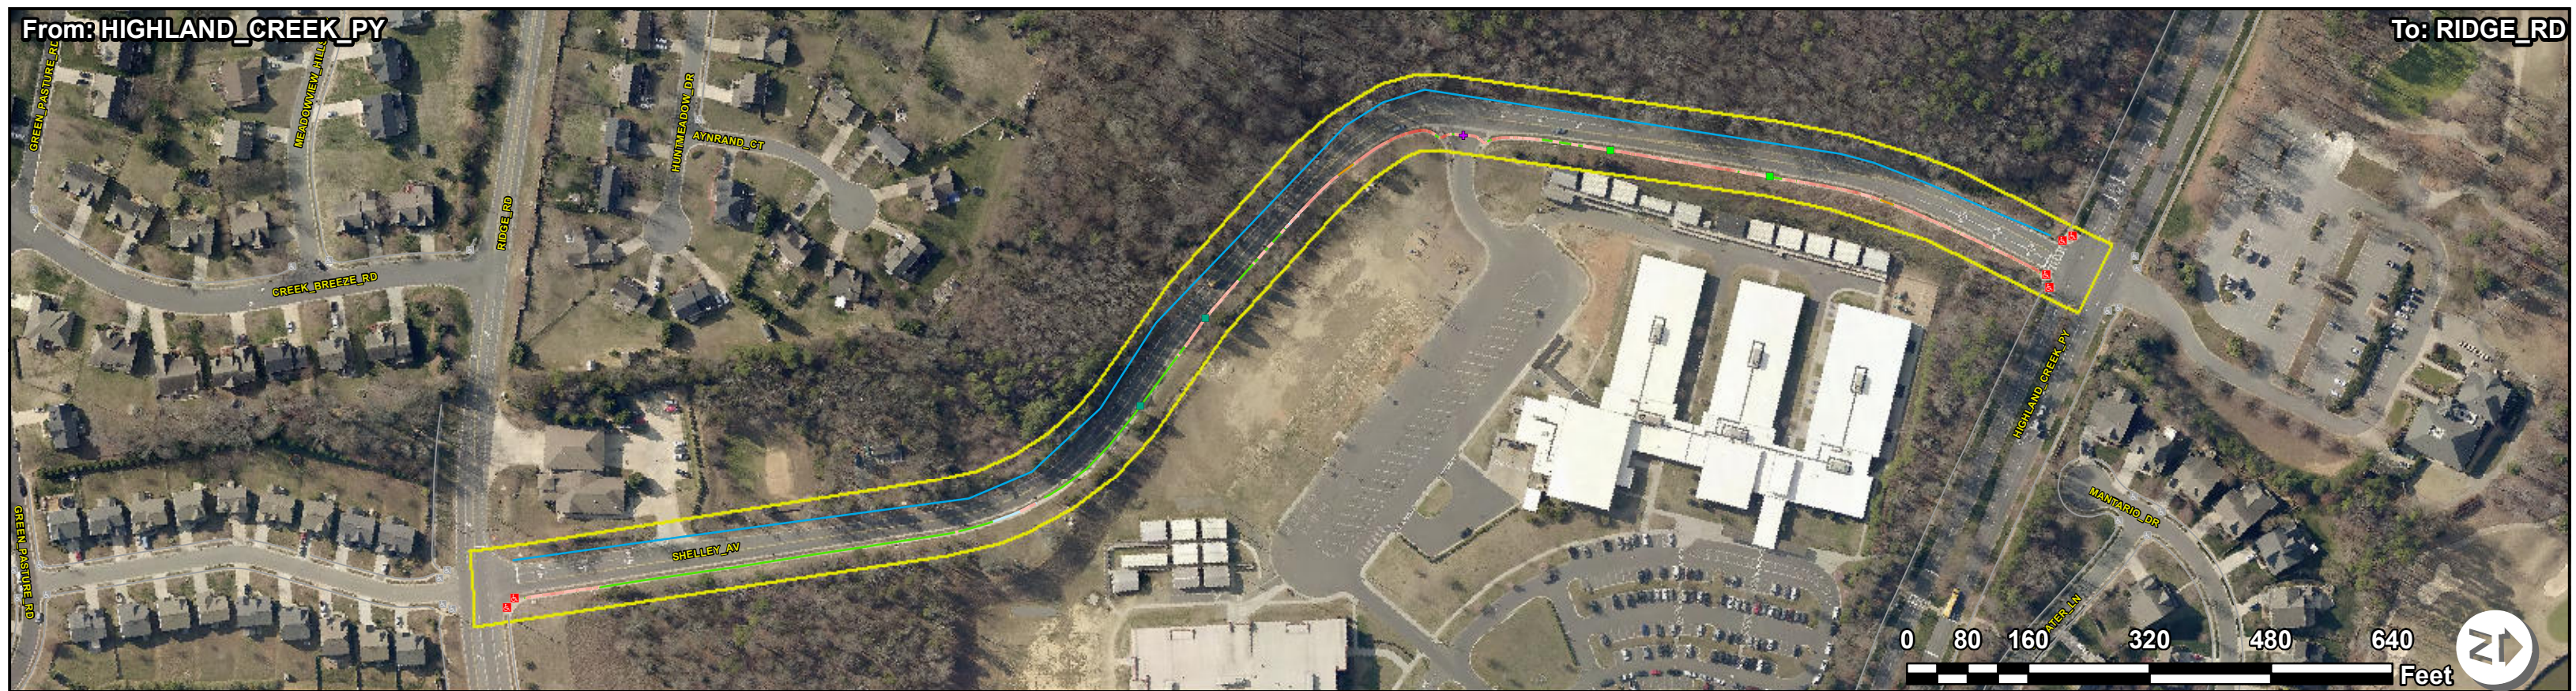

ADA Survey Summary			ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate				Corridor Total:			
Item Description	Quantity		Item Description	Quantity	Unit Price	Item Cost	Item Description	Total Count	Non Compliant Count	Cost				
1 Heavings less than 1"	11 EA		1 Heavings less than 1"	5 EA	\$ 100.00	\$ 500.00	Curb Ramps	6	6	\$ 11850.00	●	Heavings < 1" (Excluded)***	●	Heavings < 1"
2 Heavings 1" or greater	0 EA		2 Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00	Island Curb Cuts	0	0	\$ 0.00	●	Heavings ≥ 1" (Excluded)***	●	Heavings ≥ 1"
3 Uneven Heavings	0 EA		3 Uneven Heavings	0 EA	\$ 400.00	\$ 0.00	Signal Push Buttons	0	0	\$ 0.00	●	Uneven Heaving (Excluded)***	●	Uneven Heaving
4 Heaving Clusters	0 SY		4 Heaving Clusters	0 SY	\$ 75.00	\$ 0.00	Transit Stops	0	0	\$ 0.00	—	Heaving Clusters (Excluded)	—	Heaving Clusters
5 Sidewalk Joint Gaps	0 EA		5 Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings	0	0	\$ 0.00	▲	Sidewalk Joint Gap (Excluded)***	▲	Sidewalk Joint Gap
6 Miscellaneous Obstruction	0 EA		6 Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces	0	0	\$ 0.00	■	Miscellaneous Obstruction	◆	Commercial Entrance
7 Missing Sidewalk Obstruction	0 EA		7 Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:		\$ 11850.00		■	Missing Sidewalk Obstruction	◆	Residential Entrance
8 Other Obstruction	0 EA		8 Other Obstruction	0 EA	\$ 500.00	\$ 0.00					■	Other Obstruction	⊕	Commercial Entrance (within slope violation)
9 Pole Post Hydrant Obstruction	0 EA		9 Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00	Corridor Total:		\$ 59378.00		■	Pole Post Hydrant Obstruction	⊕	Residential Entrance (within slope violation)
10 Ponding Obstruction	0 EA		10 Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00					■	Ponding Obstruction		Cross Slope
11 Sidewalk Joint Obstruction	0 EA		11 Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00	■ Curb Ramps - Compliant				■	Sidewalk Joint Obstruction	■	2 - 3%
12 Sign Obstruction	0 EA		12 Sign Obstruction	0 EA	\$ 150.00	\$ 0.00	■ Curb Ramps - Non Compliant				■	Sign Obstruction	■	7.01 - 8%
13 Storm Grate Obstruction	0 EA		13 Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00	■ Island Curb Cuts - Compliant				■	Storm Grate Obstruction	■	3.01 - 4%
14 Transit Obstruction	0 EA		14 Transit Obstruction	0 EA	\$500.00	\$ 0.00	■ Island Curb Cuts - Non Compliant				■	Transit Obstruction	■	8.01 - 9%
15 Traffic Obstruction	0 EA		15 Traffic Obstruction	0 EA	\$2000.00	\$ 0.00	■ Island Curb Cuts - Non Compliant				■	Traffic Obstruction	■	4.01 - 5%
16 Tree Obstruction	0 EA		16 Tree Obstruction	0 EA	\$500.00	\$ 0.00	■ Signals - Compliant				■	Tree Obstruction	■	5.01% - 6%
17 Utility Obstruction	0 EA		17 Utility Obstruction	0 EA	\$1500.00	\$ 0.00	■ Signals - Non Compliant				■	Utility Obstruction	■	10.01 - 12%
18 Vegetation Obstruction - Low	2 EA		18 Vegetation Obstruction - Low	2 EA	\$150.00	\$ 300.00	■ Transit Stops - Compliant				■	Vegetation Obstruction - Low	■	> 12%
19 Vegetation Obstruction - Overhead	2 EA		19 Vegetation Obstruction - Overhead	2 EA	\$150.00	\$ 300.00	■ Transit Stops - Non Compliant				■	Vegetation Obstruction - Overhead	■	Running Slope
20 Commercial Entrance	1 EA		20 Commercial Entrance (within slope violation)	1 EA	\$ 5000.00	\$ 5000.00	■ Railroad Crossings - Compliant				■	Sidewalk Collection Path	■	5 - 8.33%
21 Residential Entrance	0 EA		21 Residential Entrance (within slope violation)	0 EA	\$ 3000.00	\$ 0.00	■ Railroad Crossings - Non Compliant				■	Adjacent Sidewalk Collection Path	■	8.34% - 10%
22 Total Sidewalk Length Assessed	2191.294 LF		22 Running Slope Violations**	22.026 SY	\$ 75.00	\$ 1652.00	■ Accessible Parking - Compliant				■	Buried Sidewalk	■	10.01 - 12.5%
23 Average Sidewalk Width	50 IN		23 Cross Slope Violations	483.862 SY	\$ 75.00	\$ 36290.00	■ Accessible Parking - Non Compliant				■	Sidewalk Not Surveyed	■	> 12.5%
24 No Sidewalk on Block (Approx.)	2279.391 LF		24 Running and Cross Slope Violations	46.481 SY	\$ 75.00	\$ 3486.00					■	Missing Sidewalk Gap	■	
25 Missing Sidewalk Gaps (Approx.)	0 LF		25 Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00					■	No Sidewalk on Block	■	
26 Poor Surface Condition (Approx.)	0 LF		26 Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00								
27 Buried Sidewalk (Approx.)	44.852 LF		27 Buried Sidewalk (Approx.)	44.852 LF	\$ 41.67	\$ 1760.00								
Sidewalk SubTotal:						\$ 47528.00								
*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.														
**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.														