


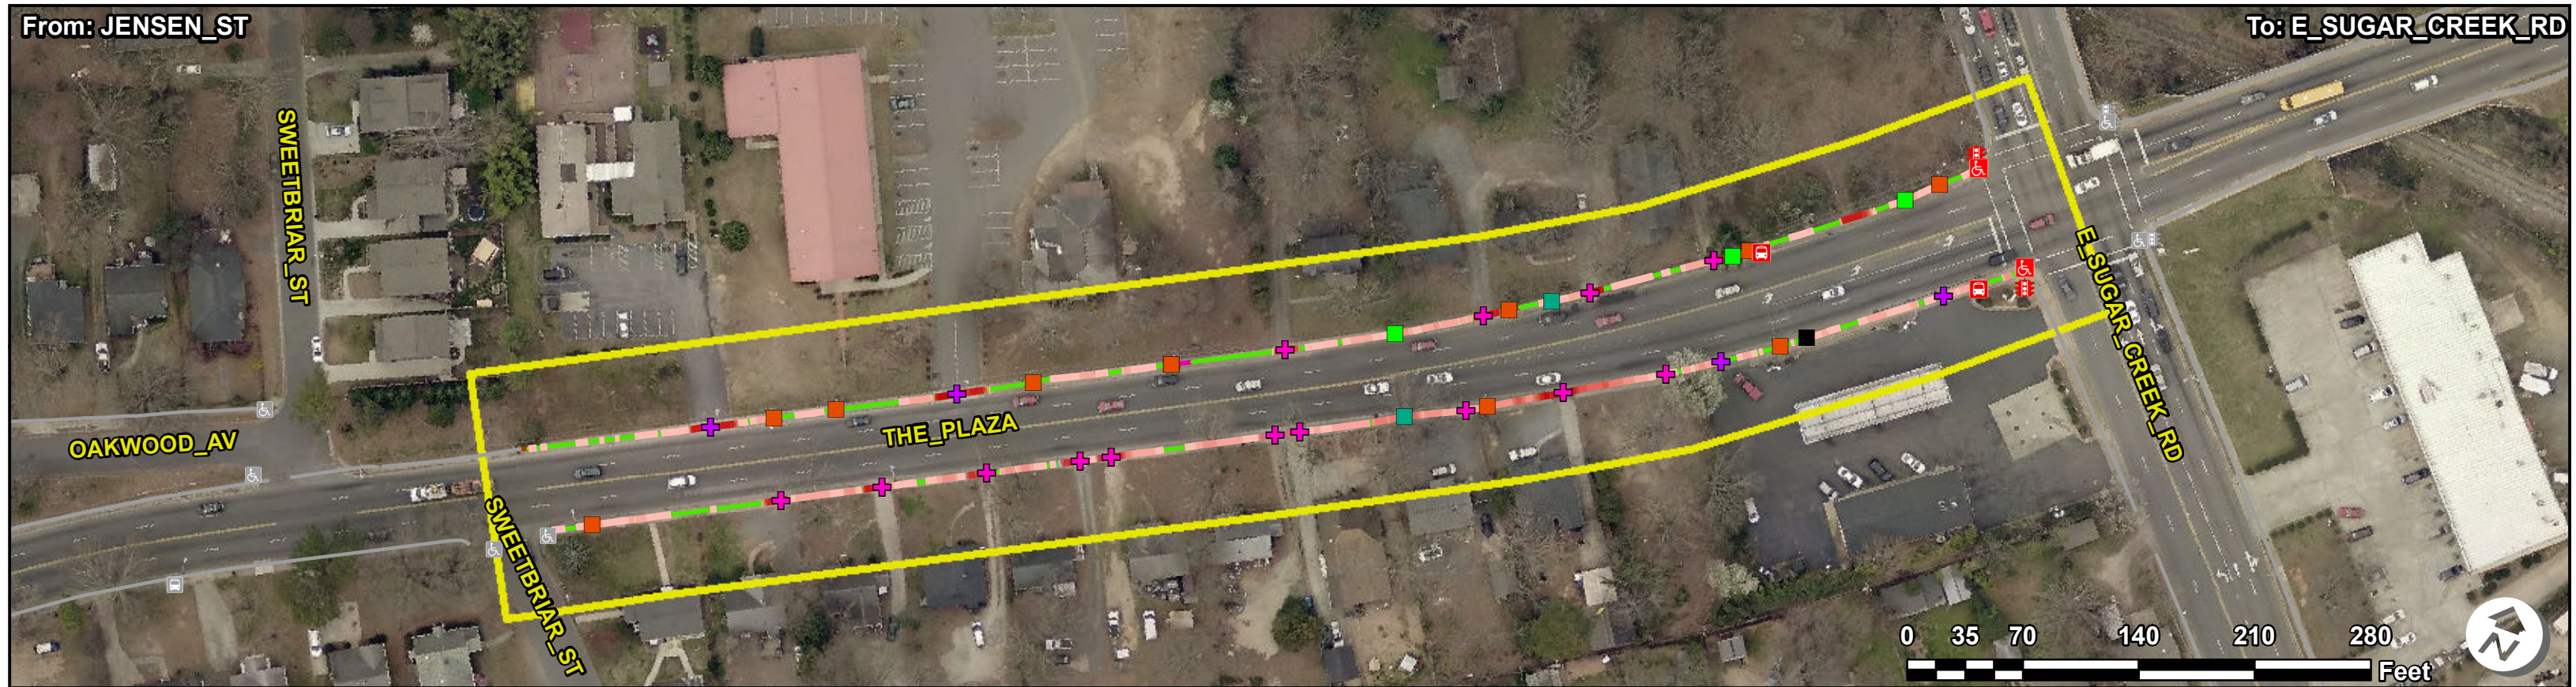

ADA Survey Summary		ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate							
Item Description	Quantity	Item Description	Quantity	Unit Price	Item Cost	Item Description	Total Count	Non Compliant Count	Cost				
1 Heavings less than 1"	46 EA	1 Heavings less than 1"	12 EA	\$ 100.00	\$ 1200.00	Curb Ramps	2	2	\$ 6900.00	● Heavings < 1" (Excluded)***	● Heavings < 1"		
2 Heavings 1" or greater	10 EA	2 Heavings 1" or greater	2 EA	\$ 400.00	\$ 800.00	Island Curb Cuts	0	0	\$ 0.00	● Heavings ≥ 1" (Excluded)***	● Heavings ≥ 1"		
3 Uneven Heavings	0 EA	3 Uneven Heavings	0 EA	\$ 400.00	\$ 0.00	Signal Push Buttons	2	2	\$ 2800.00	● Uneven Heaving (Excluded)***	● Uneven Heaving		
4 Heaving Clusters	36.033 SY	4 Heaving Clusters	0 SY	\$ 75.00	\$ 0.00	Transit Stops	2	2	\$ 4200.00	— Heaving Clusters (Excluded)	— Heaving Clusters		
5 Sidewalk Joint Gaps	0 EA	5 Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings	0	0	\$ 0.00	▲ Sidewalk Joint Gap (Excluded)***	▲ Sidewalk Joint Gap		
6 Miscellaneous Obstruction	0 EA	6 Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces	0	0	\$ 0.00	■ Miscellaneous Obstruction	◆ Commercial Entrance		
7 Missing Sidewalk Obstruction	0 EA	7 Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:			\$ 13900.00	■ Missing Sidewalk Obstruction	◆ Residential Entrance		
8 Other Obstruction	0 EA	8 Other Obstruction	0 EA	\$ 500.00	\$ 0.00					■ Other Obstruction	✚ Commercial Entrance (within slope violation)		
9 Pole Post Hydrant Obstruction	11 EA	9 Pole Post Hydrant Obstruction	11 EA	\$ 5000.00	\$ 55000.00					■ Pole Post Hydrant Obstruction	✚ Residential Entrance (within slope violation)		
10 Ponding Obstruction	0 EA	10 Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00					■ Ponding Obstruction			
11 Sidewalk Joint Obstruction	0 EA	11 Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00					■ Sidewalk Joint Obstruction			
12 Sign Obstruction	0 EA	12 Sign Obstruction	0 EA	\$ 150.00	\$ 0.00					■ Sign Obstruction			
13 Storm Grate Obstruction	0 EA	13 Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00					■ Storm Grate Obstruction			
14 Transit Obstruction	0 EA	14 Transit Obstruction	0 EA	\$500.00	\$ 0.00					■ Transit Obstruction			
15 Traffic Obstruction	0 EA	15 Traffic Obstruction	0 EA	\$2000.00	\$ 0.00					■ Traffic Obstruction			
16 Tree Obstruction	0 EA	16 Tree Obstruction	0 EA	\$500.00	\$ 0.00					■ Tree Obstruction			
17 Utility Obstruction	1 EA	17 Utility Obstruction	1 EA	\$1500.00	\$ 1500.00					■ Utility Obstruction			
18 Vegetation Obstruction - Low	3 EA	18 Vegetation Obstruction - Low	3 EA	\$150.00	\$ 450.00					■ Vegetation Obstruction - Low			
19 Vegetation Obstruction - Overhead	2 EA	19 Vegetation Obstruction - Overhead	2 EA	\$150.00	\$ 300.00					■ Vegetation Obstruction - Overhead			
20 Commercial Entrance	4 EA	20 Commercial Entrance (within slope violation)	4 EA	\$ 5000.00	\$ 20000.00					— Sidewalk Collection Path			
21 Residential Entrance	14 EA	21 Residential Entrance (within slope violation)	14 EA	\$ 3000.00	\$ 42000.00					— Adjacent Sidewalk Collection Path			
22 Total Sidewalk Length Assessed	1762.769 LF	22 Running Slope Violations**	0 SY	\$ 75.00	\$ 0.00					— Buried Sidewalk			
23 Average Sidewalk Width	64.5 IN	23 Cross Slope Violations	660.733 SY	\$ 75.00	\$ 49555.00					— Sidewalk Not Surveyed			
24 No Sidewalk on Block (Approx.)	0 LF	24 Running and Cross Slope Violations	9.681 SY	\$ 75.00	\$ 726.00					— Missing Sidewalk Gap			
25 Missing Sidewalk Gaps (Approx.)	14.92 LF	25 Missing Sidewalk Gaps (Approx.)	14.92 LF	\$ 41.67	\$ 660.00					— No Sidewalk on Block			
26 Poor Surface Condition (Approx.)	0 LF	26 Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00								
27 Buried Sidewalk (Approx.)	0 LF	27 Buried Sidewalk (Approx.)	0 LF	\$ 41.67	\$ 0.00								
		Sidewalk SubTotal:			\$ 171531.00								

Corridor Total:

\$ 186091.00

■ Curb Ramps - Compliant

■ Curb Ramps - Non Compliant

▲ Island Curb Cuts - Compliant

▲ Island Curb Cuts - Non Compliant

■ Signals - Compliant

■ Signals - Non Compliant

■ Transit Stops - Compliant

■ Transit Stops - Non Compliant

■ Railroad Crossings - Compliant

■ Railroad Crossings - Non Compliant

■ Accessible Parking - Compliant

■ Accessible Parking - Non Compliant

■ Curb Ramps - Adjacent

▲ Island Curb Cuts - Adjacent

■ Signals - Adjacent

■ Transit Stops - Adjacent

■ Railroad Crossings - Adjacent

■ Accessible Parking - Adjacent

Cross Slope

2 - 3% 3.01 - 4% 4.01 - 5% 5.01% - 6% 6.01 - 7% 7.01 - 8% 8.01 - 9% 9.01 - 10% 10.01 - 12% > 12%

Running Slope

5 - 8.33% 8.34% - 10% 10.01 - 12.5% > 12.5%

*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.

**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.

***Note: Excluded items are violations that occur in areas with slope violations and have been excluded from the cost estimate.