


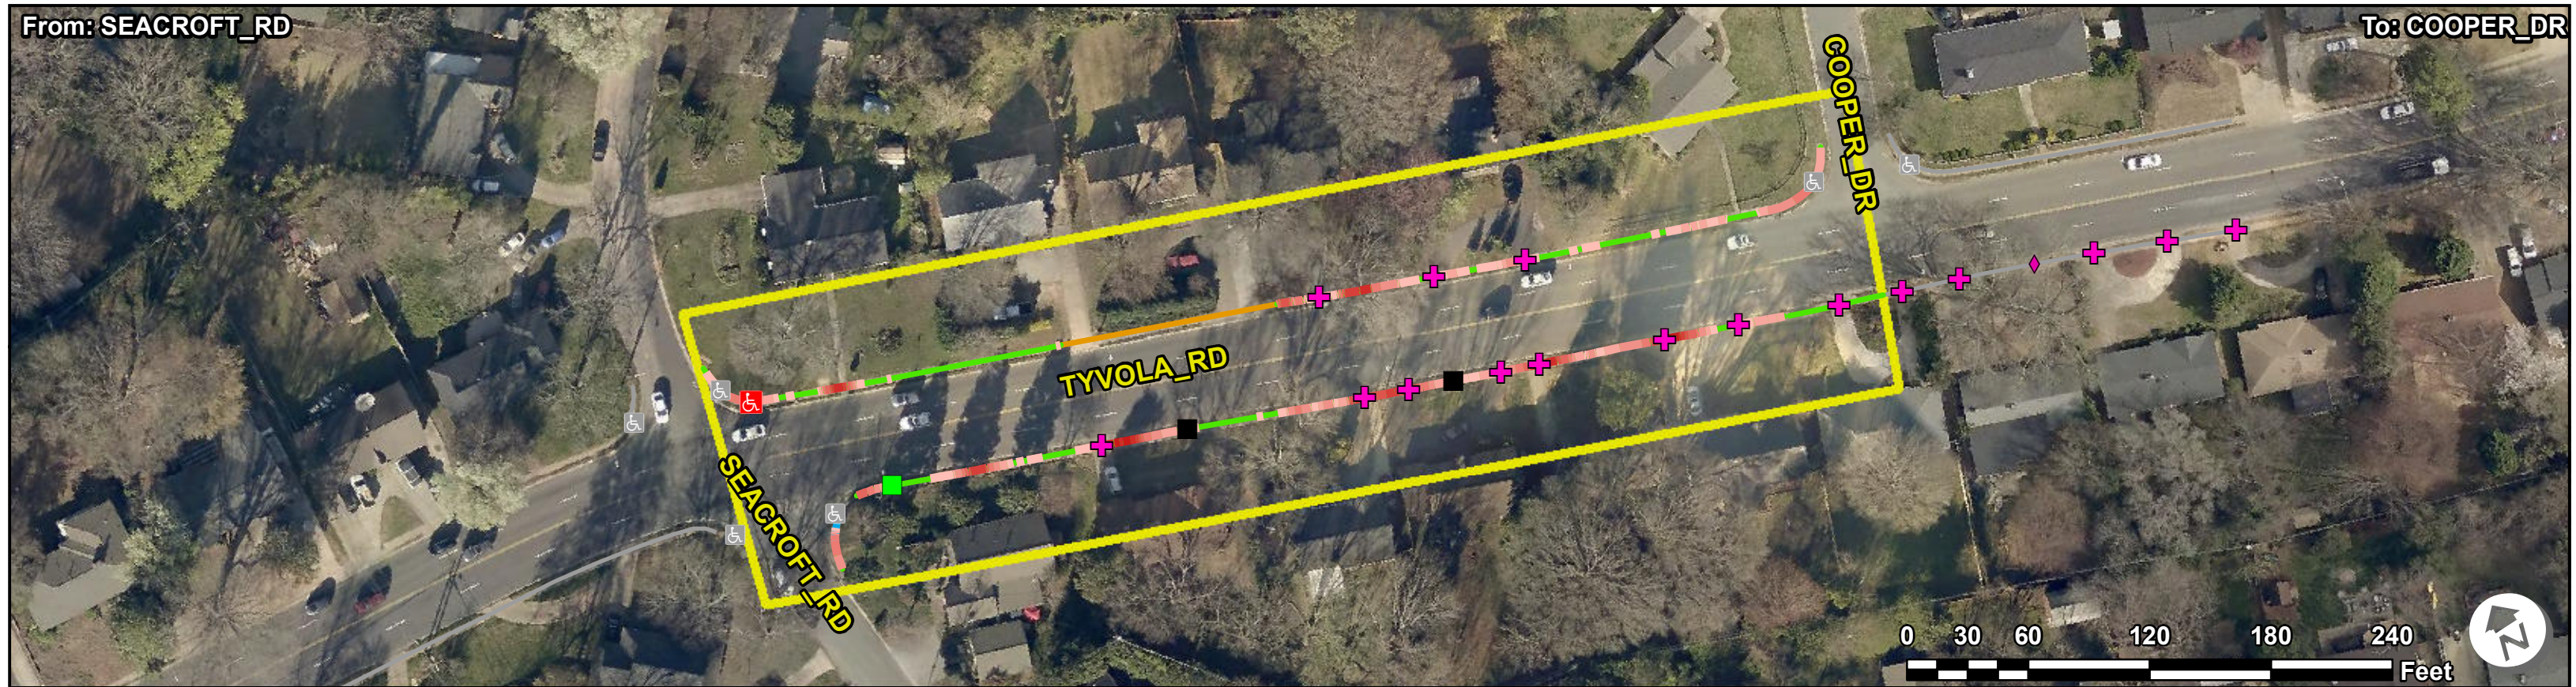

ADA Survey Summary		ADA Compliance Cost Estimate *				Intersection Inventory & Compliance Cost Estimate											
Item	Description	Quantity	Item	Description	Quantity	Unit Price	Item Cost	Item	Description	Total Count	Non Compliant Count	Cost					
1	Heavings less than 1"	23 EA	1	Heavings less than 1"	4 EA	\$ 100.00	\$ 400.00	Curb Ramps		1	1	\$ 1500.00		Heavings < 1" (Excluded)***			
2	Heavings 1" or greater	0 EA	2	Heavings 1" or greater	0 EA	\$ 400.00	\$ 0.00	Island Curb Cuts		0	0	\$ 0.00		Heavings ≥ 1" (Excluded)***			
3	Uneven Heavings	0 EA	3	Uneven Heavings	0 EA	\$ 400.00	\$ 0.00	Signal Push Buttons		0	0	\$ 0.00		Uneven Heaving (Excluded)***			
4	Heaving Clusters	1.776 SY	4	Heaving Clusters	0 SY	\$ 75.00	\$ 0.00	Transit Stops		0	0	\$ 0.00		Heaving Clusters (Excluded)			
5	Sidewalk Joint Gaps	0 EA	5	Sidewalk Joint Gaps	0 EA	\$ 200.00	\$ 0.00	Railroad Crossings		0	0	\$ 0.00		Sidewalk Joint Gap (Excluded)***			
6	Miscellaneous Obstruction	0 EA	6	Miscellaneous Obstruction	0 EA	\$ 1500.00	\$ 0.00	Accessible Parking Spaces		0	0	\$ 0.00		Miscellaneous Obstruction			
7	Missing Sidewalk Obstruction	0 EA	7	Missing Sidewalk Obstruction	0 EA	\$ 200.00	\$ 0.00	Intersection SubTotal:				\$ 1500.00		Missing Sidewalk Obstruction			
8	Other Obstruction	0 EA	8	Other Obstruction	0 EA	\$ 500.00	\$ 0.00	Corridor Total:							\$ 72475.00		Other Obstruction
9	Pole Post Hydrant Obstruction	0 EA	9	Pole Post Hydrant Obstruction	0 EA	\$ 5000.00	\$ 0.00	Curb Ramps - Compliant		Curb Ramps - Adjacent				Pole Post Hydrant Obstruction			
10	Ponding Obstruction	0 EA	10	Ponding Obstruction	0 EA	\$ 400.00	\$ 0.00	Curb Ramps - Non Compliant		Island Curb Cuts - Adjacent				Ponding Obstruction			
11	Sidewalk Joint Obstruction	0 EA	11	Sidewalk Joint Obstruction	0 EA	\$ 100.00	\$ 0.00	Island Curb Cuts - Compliant		Island Curb Cuts - Adjacent				Sidewalk Joint Obstruction			
12	Sign Obstruction	0 EA	12	Sign Obstruction	0 EA	\$ 150.00	\$ 0.00	Island Curb Cuts - Non Compliant		Signals - Adjacent				Sign Obstruction			
13	Storm Grate Obstruction	0 EA	13	Storm Grate Obstruction	0 EA	\$700.00	\$ 0.00	Signals - Compliant		Signals - Adjacent				Storm Grate Obstruction			
14	Transit Obstruction	0 EA	14	Transit Obstruction	0 EA	\$500.00	\$ 0.00	Signals - Non Compliant		Transit Stops - Adjacent				Transit Obstruction			
15	Traffic Obstruction	0 EA	15	Traffic Obstruction	0 EA	\$2000.00	\$ 0.00	Transit Stops - Compliant		Transit Stops - Adjacent				Traffic Obstruction			
16	Tree Obstruction	0 EA	16	Tree Obstruction	0 EA	\$500.00	\$ 0.00	Transit Stops - Non Compliant		Railroad Crossings - Adjacent				Tree Obstruction			
17	Utility Obstruction	2 EA	17	Utility Obstruction	2 EA	\$1500.00	\$ 3000.00	Railroad Crossings - Compliant		Accessible Parking - Adjacent				Utility Obstruction			
18	Vegetation Obstruction - Low	1 EA	18	Vegetation Obstruction - Low	1 EA	\$150.00	\$ 150.00	Railroad Crossings - Non Compliant						Vegetation Obstruction - Low			
19	Vegetation Obstruction - Overhead	0 EA	19	Vegetation Obstruction - Overhead	0 EA	\$150.00	\$ 0.00	Accessible Parking - Compliant						Vegetation Obstruction - Overhead			
20	Commercial Entrance	0 EA	20	Commercial Entrance (within slope violation)	0 EA	\$ 5000.00	\$ 0.00	Accessible Parking - Non Compliant						Sidewalk Collection Path			
21	Residential Entrance	17 EA	21	Residential Entrance (within slope violation)	16 EA	\$ 3000.00	\$ 48000.00							Adjacent Sidewalk Collection Path			
22	Total Sidewalk Length Assessed	1004.792 LF	22	Running Slope Violations**	0.466 SY	\$ 75.00	\$ 35.00							Buried Sidewalk			
23	Average Sidewalk Width	48 IN	23	Cross Slope Violations	255.766 SY	\$ 75.00	\$ 19182.00							Sidewalk Not Surveyed			
24	No Sidewalk on Block (Approx.)	0 LF	24	Running and Cross Slope Violations	2.763 SY	\$ 75.00	\$ 207.00							Missing Sidewalk Gap			
25	Missing Sidewalk Gaps (Approx.)	0 LF	25	Missing Sidewalk Gaps (Approx.)	0 LF	\$ 41.67	\$ 0.00							No Sidewalk on Block			
26	Poor Surface Condition (Approx.)	0 LF	26	Poor Surface Condition (Approx.)	0 LF	\$ 41.67	\$ 0.00										
27	Buried Sidewalk (Approx.)	108.656 LF	27	Buried Sidewalk (Approx.)	108.656 LF	\$ 41.67	\$ 4620.00										
			Sidewalk SubTotal:				\$ 70975.00										
															Cross Slope		
															2 - 3%	7.01 - 8%	
															3.01 - 4%	8.01 - 9%	
															4.01 - 5%	9.01 - 10%	
															5.01% - 6%	10.01 - 12%	
															6.01 - 7%	> 12%	
															Running Slope		
															5 - 8.33%		
															8.34% - 10%		
															10.01 - 12.5%		
															> 12.5%		

Heavings < 1"Heavings ≥ 1"Uneven HeavingHeaving ClustersSidewalk Joint GapCommercial EntranceResidential EntranceCommercial Entrance (within slope violation)Residential Entrance (within slope violation)Cross Slope2 - 3%3.01 - 4%4.01 - 5%5.01% - 6%6.01 - 7%7.01 - 8%8.01 - 9%9.01 - 10%10.01 - 12%> 12%Running Slope5 - 8.33%8.34% - 10%10.01 - 12.5%> 12.5%

*Note: ADA pedestrian issues have been identified and quantified in the ADA Survey Summary. There are instances where multiple issues can be resolved with a single corrective measure. The ADA Compliance Cost Estimate reflects the best estimation of quantities and cost to resolve all identified ADA issues.

**Note: Additional investigation may be warranted when sidewalk running slope issues exist within the right-of-way.

***Note: Excluded items are violations that occur in areas with slope violations and have been excluded from the cost estimate.