


Access Compliance Report

Public Rights-of-Way

(Curb Ramps)

Intersection ID: 13854	Main Street: E_PARK_AV	Cross Street: SOUTH_BV	Location: NW
ADA ID: 3F084626E588	Ramp Type: BlendTrans1	Initial Pass/Fail: Pass	Overall Compliance: No
Severity Score: 5.25			
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

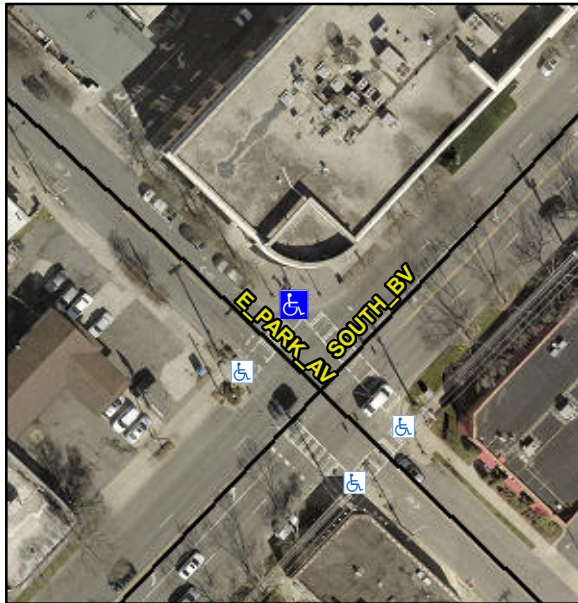

Possible Solutions:

Remove & Replace Curb Ramp With Two New Directional Ramps or Equivalent. Restripe Crosswalk(s) To Provide Clear space. Remove & Replace Gutter.

Surveyor Notes:

N/A

PROW/ADA:

Not Found, R304.5.3, R207.1, R304.5.4

Street 1 Name **E PARK AV**
 Stop Condition-Street 1 **Signal**
 Street 2 Name **SOUTH BV**
 Stop Condition-Street 2 **Signal**

Total Cost: \$ **4450.00**

Compliance	Description	Data	Compliance	Description	Data
N/A	Ramp Length (in)	24.0	Yes	BlendTrans Slope (%)	1.3
Yes	Ramp Width (in)	48.0	No	BlendTrans XSlope (%)	2.1
N/A	Flare Type LT	Sloped	N/A	Flare Type RT	Sloped
Yes	Flare Slope LT (%)	4.6	Yes	Flare Slope RT (%)	3.5
N/A	Flare Traversable LT?	Yes	N/A	Flare Traversable RT?	Yes
Yes	Landing Length (in)	48.0	Yes	DWS Provided?	Yes
Yes	Landing Width (in)	48.0	Yes	DWS Contrast?	Yes
Yes	Landing Slope (%)	1.0	Yes	DWS Length (in)	24.0
Yes	Landing X Slope (%)	1.3	Yes	DWS Full Width?	Yes
N/A	Landing Curb? (Y/N)	No	Yes	DWS Offset (in)	1.0
N/A	Shared Landing?	No			
Yes	Gutter Ponding?	No	No	Gutter Slope (%)	6.3
Yes	Gutter Lip Ht (in)	0.0	Yes	Gutter X Slope (%)	1.6
N/A	Painted X Walk1?	Yes	N/A	Painted X Walk2?	Yes
	X Walk 1 Direction	To SW		X Walk 2 Direction	To SE
	X Walk 1 Width (in)	111.0		X Walk 2 Width (in)	102.0
	X Walk 1 Slope (%)	4.0		X Walk 2 Slope (%)	5.4
	X Walk 1 X Slope (%)	4.0		X Walk 2 X Slope (%)	0.7
Yes	Ramp inside XWalk1?	Yes	No	Ramp inside XWalk2?	No
	Road Slope (%)	1.6		Clear Space?	Yes
	Road X Slope (%)	5.5	No	Clear Space to XWalk (in)	30.0
Yes	Any Obstructions?	No	Yes	Storm Grate/Utility Hazard?	No
	Obstruction Type			Storm Grate/Utility Type	
		N/A			N/A
			Yes	Surface Condition? (G/P)	Good
			No	Curb Slope (%)	5.6

