

Access Compliance Report


Public Rights-of-Way

(Curb Ramps)

Intersection ID: 26590	Main Street: PROVIDENCE_RD	Cross Street: COUNTRY_LN	Location: SW
ADA ID: 5610A80A823B	Ramp Type: PerpDiag	Initial Pass/Fail: Pass	Overall Compliance: No
		Severity Score: 10	

Codes/Mitigation Info/Possible Solution

Field Measurements/Component Compliance

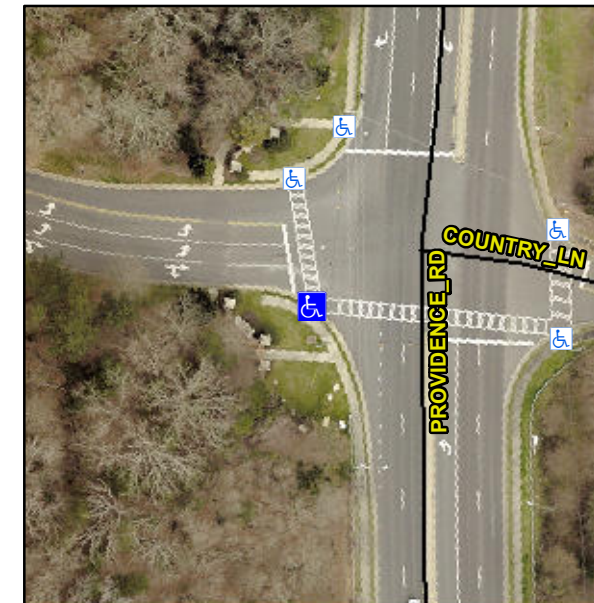

Possible Solutions:

Remove & Replace Curb Ramp With Two New Directional Ramps or Equivalent.

Surveyor Notes:

N/A

PROW/ADA:

R304.2.1, R304.2.2-Perp, R304.3.2-Para, R304.5.3, R305.2

Total Cost: \$ 3200.00

Compliance	Description	Data	Compliance	Description	Data
N/A	Ramp Length (in)	85.0	Yes	Ramp Slope (%)	6.3
Yes	Ramp Width (in)	48.5	Yes	Ramp XSlope (%)	0.7
N/A	Flare Type LT	Sloped	N/A	Flare Type RT	N/A
N/A	Flare Slope LT (%)	4.3	Yes	Flare Slope RT (%)	5.3
N/A	Flare Traversable LT?	Yes	N/A	Flare Traversable RT?	Yes
No	Landing Length (in)	N/A	Yes	DWS Provided?	Yes
No	Landing Width (in)	N/A	Yes	DWS Contrast?	Yes
No	Landing Slope (%)	N/A	Yes	DWS Length (in)	24.0
No	Landing X Slope (%)	N/A	Yes	DWS Full Width?	Yes
N/A	Landing Curb? (Y/N)	No	No	DWS Offset (in)	5.0
N/A	Shared Landing?	N/A			
Yes	Gutter Ponding?	No	Yes	Gutter Slope (%)	4.7
Yes	Gutter Lip Ht (in)	0.0	Yes	Gutter X Slope (%)	0.6
N/A	Painted X Walk1?	Yes	N/A	Painted X Walk2?	Yes
	X Walk 1 Direction	To SE		X Walk 2 Direction	To N
N/A	X Walk 1 Width (in)	78.5	N/A	X Walk 2 Width (in)	80.0
	X Walk 1 Slope (%)	2.1		X Walk 2 Slope (%)	3.9
	X Walk 1 X Slope (%)	2.6		X Walk 2 X Slope (%)	4.5
Yes	Ramp inside XWalk1?	Yes	Yes	Ramp inside XWalk2?	Yes
	Road Slope (%)	0.3	N/A	Clear Space?	Yes
	Road X Slope (%)	3.6	Yes	Clear Space to XWalk (in)	76.0
Yes	Any Obstructions?	No	Yes	Storm Grate/Utility Hazard?	No
	Obstruction Type			Storm Grate/Utility Type	
		N/A			N/A
			Yes	Surface Condition? (G/P)	Good

Street 1 Name PROVIDENCE RD
 Stop Condition-Street 2 Signal
 Street 2 Name COUNTRY LN
 Stop Condition-Street 1 Signal

