


Access Compliance Report

Public Rights-of-Way

(Curb Ramps)

Intersection ID: 12170	Main Street: S_POPLAR_ST	Cross Street: W_4TH_ST	Location:	N
ADA ID: 83EE530B67A4	Ramp Type: PerpDiag	Initial Pass/Fail: Pass	Overall Compliance: No	Severity Score: 0
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance		

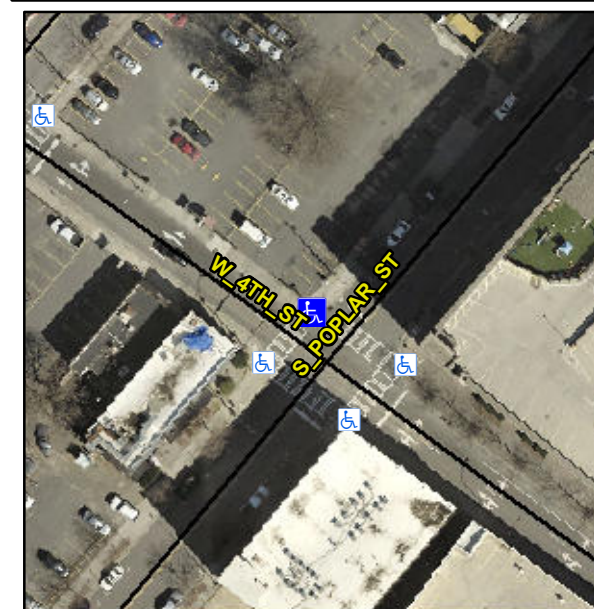

Possible Solutions:

Remove & Replace Curb Ramp With Two New Directional Ramps or Equivalent.

Surveyor Notes:

N/A

PROW/ADA:

R304.2.1, R304.2.2-Perp, R304.3.2-Para, R304.5.3, R305.2

Total Cost: \$ 3200.00

Compliance	Description	Data	Compliance	Description	Data
N/A	Ramp Length (in)	70.0	Yes	Ramp Slope (%)	6.3
Yes	Ramp Width (in)	48.0	Yes	Ramp XSlope (%)	1.1
N/A	Flare Type LT	Sloped	N/A	Flare Type RT	N/A
N/A	Flare Slope LT (%)	2.6	Yes	Flare Slope RT (%)	8.5
N/A	Flare Traversable LT?	Yes	N/A	Flare Traversable RT?	Yes
No	Landing Length (in)	34.0	Yes	DWS Provided?	Yes
Yes	Landing Width (in)	54.0	Yes	DWS Contrast?	Yes
No	Landing Slope (%)	4.3	Yes	DWS Length (in)	24.0
No	Landing X Slope (%)	3.7	Yes	DWS Full Width?	Yes
N/A	Landing Curb? (Y/N)	No	No	DWS Offset (in)	6.0
N/A	Shared Landing?	No			
Yes	Gutter Ponding?	No	Yes	Gutter Slope (%)	2.2
Yes	Gutter Lip Ht (in)	0.0	Yes	Gutter X Slope (%)	0.8
N/A	Painted X Walk1?	Yes	N/A	Painted X Walk2?	Yes
	X Walk 1 Direction	To SW		X Walk 2 Direction	To SE
N/A	X Walk 1 Width (in)	112.0	N/A	X Walk 2 Width (in)	113.0
	X Walk 1 Slope (%)	0.7		X Walk 2 Slope (%)	0.3
	X Walk 1 X Slope (%)	2.1		X Walk 2 X Slope (%)	0.8
Yes	Ramp inside XWalk1?	Yes	Yes	Ramp inside XWalk2?	Yes
	Road Slope (%)	2.2	N/A	Clear Space?	Yes
	Road X Slope (%)	0.9	Yes	Clear Space to XWalk (in)	93.0
Yes	Any Obstructions?	No	Yes	Storm Grate/Utility Hazard?	No
	Obstruction Type			Storm Grate/Utility Type	
		N/A			N/A
			Yes	Surface Condition? (G/P)	Good

