


Access Compliance Report

Public Rights-of-Way

(Curb Ramps)

Intersection ID: 54154	Main Street: DEWEY_CREEK_LN	Cross Street: MAPLE_CREEK_CT	Location: NE
ADA ID: 9B9076CF008E	Ramp Type: Perp	Initial Pass/Fail: Pass	Overall Compliance: No
Severity Score: 15			
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

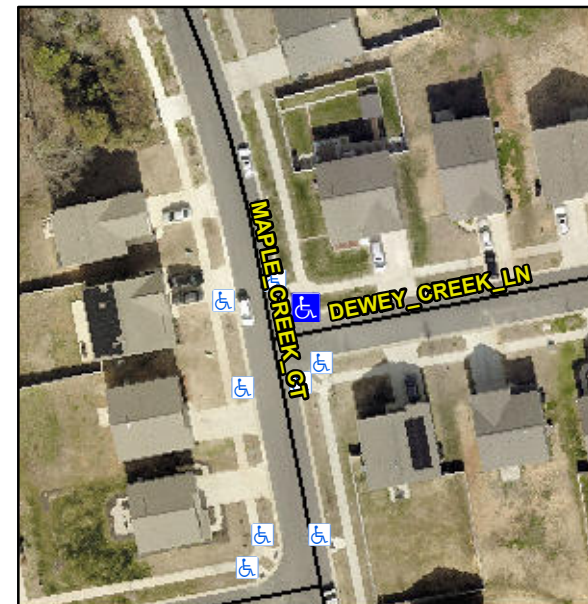

Possible Solutions:

Remove & Replace Detectable Warning System. Remove & Replace Gutter.

Surveyor Notes:

N/A

PROW/ADA:

R305.2, R302.7.2, R304.5.3

Street 1 Name **DEWEY CREEK LN**
 Stop Condition-Street 2 **StopSign**
 Street 2 Name **N/A**
 Stop Condition-Street 1 **N/A**

Total Cost: \$ **1550.00**

Compliance	Description	Data	Compliance	Description	Data
N/A	Ramp Length (in)	93.5	Yes	Ramp Slope (%)	5.8
Yes	Ramp Width (in)	59.0	Yes	Ramp XSlope (%)	0.6
N/A	Flare Type LT	Sloped	N/A	Flare Type RT	N/A
N/A	Flare Slope LT (%)	9.3	N/A	Flare Slope RT (%)	9.2
N/A	Flare Traversable LT?	Yes	N/A	Flare Traversable RT?	No
Yes	Landing Length (in)	60.0	Yes	DWS Provided?	Yes
Yes	Landing Width (in)	62.0	Yes	DWS Contrast?	Yes
Yes	Landing Slope (%)	0.8	Yes	DWS Length (in)	24.0
Yes	Landing X Slope (%)	0.8	Yes	DWS Full Width?	Yes
N/A	Landing Curb? (Y/N)	No	No	DWS Offset (in)	3.5
N/A	Shared Landing?	No			
Yes	Gutter Ponding?	No	Yes	Gutter Slope (%)	1.1
No	Gutter Lip Ht (in)	1.5	No	Gutter X Slope (%)	2.5
N/A	Painted X Walk1?	No	N/A	Painted X Walk2?	N/A
	X Walk 1 Direction	To S		X Walk 2 Direction	N/A
N/A	X Walk 1 Width (in)	N/A	N/A	X Walk 2 Width (in)	N/A
	X Walk 1 Slope (%)	1.7		X Walk 2 Slope (%)	N/A
	X Walk 1 X Slope (%)	1.9		X Walk 2 X Slope (%)	N/A
N/A	Ramp inside XWalk1?	N/A	N/A	Ramp inside XWalk2?	N/A
	Road Slope (%)	N/A	N/A	Clear Space?	Yes
	Road X Slope (%)	N/A	N/A	Clear Space to XWalk (in)	N/A
Yes	Any Obstructions?	No	Yes	Storm Grate/Utility Hazard?	No
	Obstruction Type			Storm Grate/Utility Type	
		N/A			N/A
			Yes	Surface Condition? (G/P)	Good

