


# Access Compliance Report

## Public Rights-of-Way

### (Curb Ramps)

Intersection ID: 14294	Main Street: EAST_BV	Cross Street: EUCLID_AV	Location: NE
ADA ID: F1F06BADE824	Ramp Type: Directional1	Initial Pass/Fail: Pass	Overall Compliance: No
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	
Severity Score: 0.25			

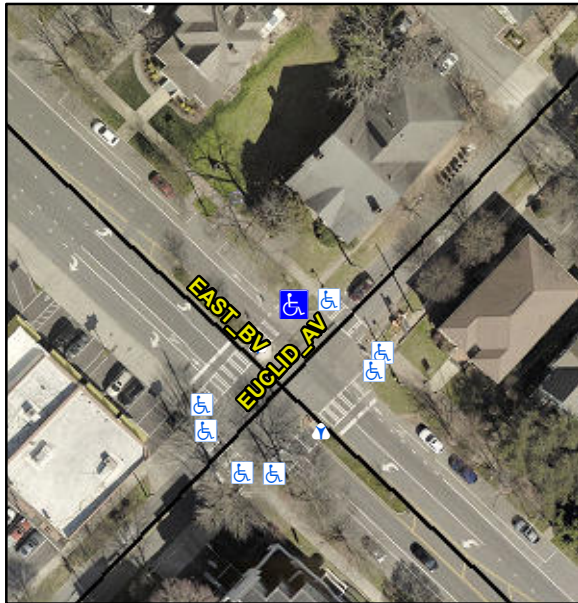

Possible Solutions:

**Remove & Replace Landing.**

Surveyor Notes:

**LNDG SLOPE NEGATIVE**

PROW/ADA:

**R304.2.2-Perp, R304.3.2-Para**

Compliance	Description	Data	Compliance	Description	Data
N/A	Ramp Length (in)	70.0	Yes	Grade Break?	Yes
Yes	Ramp Width (in)	72.0	Yes	Grade Break Slope (%)	1.3
Yes	Ramp Slope (%)	2.7	Yes	Grade Break XSlope (%)	2.3
Yes	Ramp XSlope (%)	2.9			
Yes	Flare Type LT	N/A	Yes	Flare Type RT	N/A
N/A	Flare Slope LT (%)	N/A	N/A	Flare Slope RT (%)	N/A
N/A	Flare Traversable LT?	No	N/A	Flare Traversable RT?	No
Yes	Landing Length (in)	69.0	Yes	DWS Provided?	Yes
Yes	Landing Width (in)	72.0	Yes	DWS Contrast?	Yes
No	Landing Slope (%)	4.6	Yes	DWS Length (in)	25.0
Yes	Landing X Slope (%)	2.0	Yes	DWS Full Width?	Yes
N/A	Landing Curb? (Y/N)	No	Yes	DWS Offset LT (in)	22.0
N/A	Shared Landing?	No	Yes	DWS Offset RT (in)	0.0
Yes	Gutter Ponding?	No	Yes	Gutter Slope (%)	0.7
Yes	Gutter Lip Ht (in)	0.0	Yes	Gutter X Slope (%)	2.9
N/A	Painted X Walk1?	Yes		Road Slope (%)	1.5
	X Walk 1 Direction	To SW		Road X Slope (%)	3.2
	X Walk 1 Width (in)	112.0		Clear Space?	Yes
	X Walk 1 Slope (%)	1.5	N/A	Clear Space to XWalk (in)	N/A
	X Walk 1 X Slope (%)	3.2	Yes	Storm Grate/Utility Hazard?	No
Yes	Ramp inside XWalk1?	Yes		Storm Grate/Utility Type	
Yes	Any Obstructions?	No			N/A
	Obstruction Type		Yes	Surface Condition? (G/P)	Good
			N/A	Curb Slope (%)	1.7

Total Cost: \$ 500.00

