

# Access Compliance Report


## Public Rights-of-Way

### (Curb Ramps)

Intersection ID: 10140	Main Street: E_36TH_ST	Cross Street: N_ALEXANDER_ST	Location: N
ADA ID: F2E0A88D6B5B	Ramp Type: PerpDiag	Initial Pass/Fail: Pass	Overall Compliance: No
		Severity Score: 0.25	

#### Codes/Mitigation Info/Possible Solution

#### Field Measurements/Component Compliance

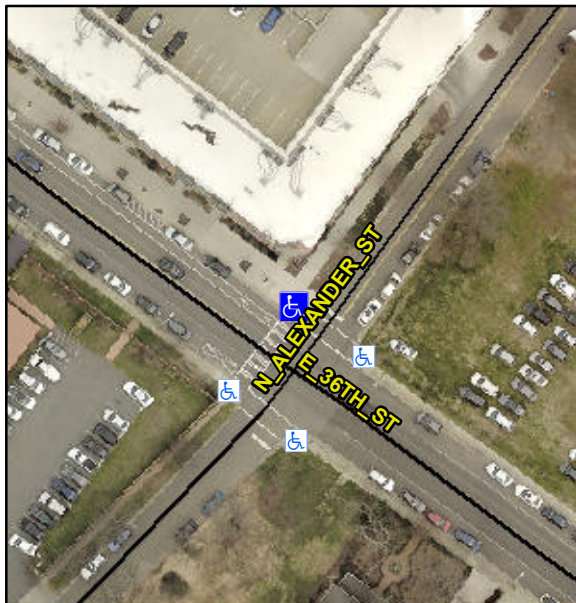

Possible Solutions:

**Remove & Replace Curb Ramp With Two New Directional Ramps or Equivalent. Remove & Replace Gutter.**

Surveyor Notes:

**N/A**

PROW/ADA:

**Not Found, R304.5.3, R305.2**

Street 1 Name **E 36TH ST**  
 Stop Condition-Street 2 **None**  
 Street 2 Name **N ALEXANDER ST**  
 Stop Condition-Street 1 **StopSign**

Total Cost: \$ **3950.00**

Compliance	Description	Data	Compliance	Description	Data
N/A	Ramp Length (in)	96.0	Yes	Ramp Slope (%)	5.2
Yes	Ramp Width (in)	48.0	No	Ramp XSlope (%)	3.0
N/A	Flare Type LT	Sloped	N/A	Flare Type RT	N/A
N/A	Flare Slope LT (%)	9.5	Yes	Flare Slope RT (%)	1.2
N/A	Flare Traversable LT?	Yes	N/A	Flare Traversable RT?	Yes
Yes	Landing Length (in)	48.0	Yes	DWS Provided?	Yes
Yes	Landing Width (in)	48.0	Yes	DWS Contrast?	Yes
Yes	Landing Slope (%)	0.3	Yes	DWS Length (in)	24.0
Yes	Landing X Slope (%)	1.5	Yes	DWS Full Width?	Yes
N/A	Landing Curb? (Y/N)	No	No	DWS Offset (in)	5.0
N/A	Shared Landing?	No			
Yes	Gutter Ponding?	No	Yes	Gutter Slope (%)	2.2
Yes	Gutter Lip Ht (in)	0.0	No	Gutter X Slope (%)	5.5
N/A	Painted X Walk1?	Yes	N/A	Painted X Walk2?	Yes
	X Walk 1 Direction	To SW		X Walk 2 Direction	To SE
N/A	X Walk 1 Width (in)	110.0	N/A	X Walk 2 Width (in)	103.0
	X Walk 1 Slope (%)	4.0		X Walk 2 Slope (%)	4.0
	X Walk 1 X Slope (%)	1.6		X Walk 2 X Slope (%)	4.9
Yes	Ramp inside XWalk1?	Yes	Yes	Ramp inside XWalk2?	Yes
	Road Slope (%)	1.8	N/A	Clear Space?	Yes
	Road X Slope (%)	4.5	Yes	Clear Space to XWalk (in)	57.0
Yes	Any Obstructions?	No	Yes	Storm Grate/Utility Hazard?	No
	Obstruction Type			Storm Grate/Utility Type	
		N/A			N/A
			Yes	Surface Condition? (G/P)	Good

