


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10020730	Main Street: BEATTIES_FORD_RD	Cross Street: N/A	Location: SW
ADA ID: 008F4672330B	Overall Compliance: No	Severity Score: 20	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

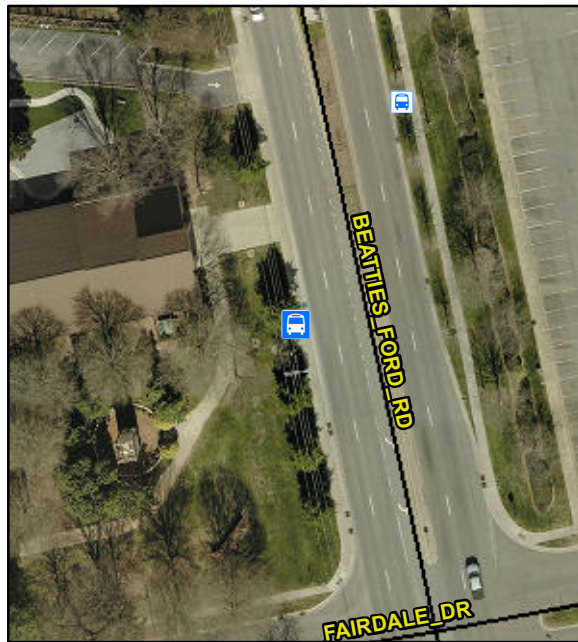

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, R302, R302.5,
R308.1.1.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	115.0
No	Boarding Area Slope %	4.3
Yes	Boarding Area XSlope %	0.0
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	0.5
No	PAR 1 XSlope %	2.9
N/A	PAR 1 XSlope Location	Perp
N/A	PAR 2 Exist?	No
N/A	PAR 2 Width (in)	N/A
N/A	PAR 2 Slope %	N/A
N/A	PAR 2 XSlope %	N/A
N/A	PAR 2 XSlope Location	N/A
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	0.0
N/A	Shelter	No
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	48.0
Yes	Clear Floor Space Length (in)	56.0
Yes	Clear Floor Space Slope %	0.7
Yes	Clear Floor Space XSlope %	1.0
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	87.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

CATS Stop ID: 02760

CATS Stop Description: **Beatties Ford Rd & Fairdale Dr**

CATS Route ID: 7

CATS Route Name: **Beatties Ford**

Total Cost: \$ 1450.00

