


# Access Compliance Report Public Rights-of-Way (Transit Stops)

|                                         |                        |                                         |              |
|-----------------------------------------|------------------------|-----------------------------------------|--------------|
| Intersection ID: 10037872               | Main Street: SHARON_RD | Cross Street: N/A                       | Location: NE |
| ADA ID: 020B6358B45D                    | Overall Compliance: No | Severity Score: 40                      |              |
| Codes/Mitigation Info/Possible Solution |                        | Field Measurements/Component Compliance |              |

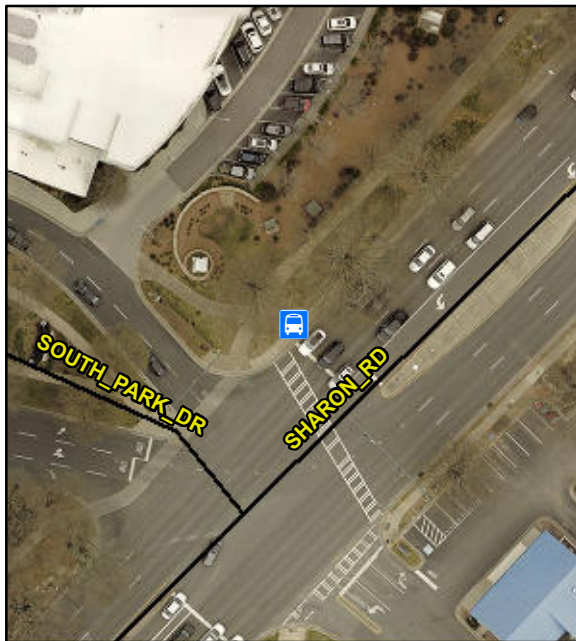

Possible Solutions:

**Remove & Replace Boarding Area.  
Remove & Replace Sidewalk To  
Boarding Area.**

Surveyor Notes:

**N/A**

PROW/ADA:

**402.2, 810.2.2, 810.2.3, R302, R302.5,  
R308.1.1.1**

| Compliance | Description                     | Data |
|------------|---------------------------------|------|
| Yes        | Boarding Area                   | Yes  |
| Yes        | Boarding Area Width (in)        | 71.0 |
| No         | Boarding Area Length (in)       | 65.0 |
| Yes        | Boarding Area Slope %           | 2.0  |
| Yes        | Boarding Area XSlope %          | 0.9  |
| No         | PAR 1 Exist?                    | Yes  |
| Yes        | PAR 1 Width (in)                | 60.0 |
| Yes        | PAR 1 Slope %                   | 0.2  |
| No         | PAR 1 XSlope %                  | 2.1  |
| N/A        | PAR 1 XSlope Location           | Perp |
| Yes        | PAR 2 Exist?                    | Yes  |
| Yes        | PAR 2 Width (in)                | 60.0 |
| Yes        | PAR 2 Slope %                   | 0.6  |
| Yes        | PAR 2 XSlope %                  | 1.0  |
| N/A        | PAR 2 XSlope Location           | Perp |
| Yes        | Boarding Area Connected to PAR? | Yes  |
| N/A        | Road Slope %                    | 0.8  |
| N/A        | Shelter                         | No   |
| N/A        | Clear Floor Space               | No   |
| N/A        | Clear Floor Space Shelter       | No   |
| N/A        | Clear Floor Space Width (in)    | N/A  |
| N/A        | Clear Floor Space Length (in)   | N/A  |
| N/A        | Clear Floor Space Slope %       | N/A  |
| N/A        | Clear Floor Space XSlope %      | N/A  |
| N/A        | Alcove Condition?               | No   |
| Yes        | Transit Sign?                   | Yes  |
| Yes        | Transit Sign Height (in)        | 93.0 |
| N/A        | Bench?                          | No   |
| Yes        | Protruding Objects?             | No   |

CATS Stop ID: 28760

CATS Stop Description: Sharon Rd @ SouthPark Mall Entrance

CATS Route ID: 19, 28

CATS Route Name: Multiple

Total Cost: \$ 1450.00

