


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10011126	Main Street: EASTWAY_DR	Cross Street: N/A	Location: E
ADA ID: 13059EB48E7A	Overall Compliance: No	Severity Score: 20	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

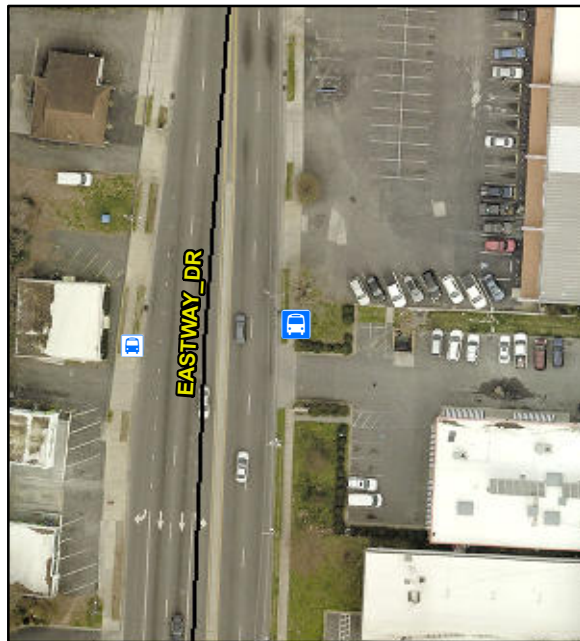

Possible Solutions:

Remove & Replace Boarding Area.

Surveyor Notes:

N/A

PROW/ADA:

**810.2.2, 810.2.4, R308.1.1.1,
R308.1.1.2**

CATS Stop ID: **09250**

CATS Stop Description: **Eastway Dr & Central Ave**

CATS Route ID: **17, 39**

CATS Route Name: **Multiple**

Total Cost: \$ **750.00**

Compliance	Description	Data
Yes	Boarding Area	Yes
No	Boarding Area Width (in)	55.0
Yes	Boarding Area Length (in)	108.0
No	Boarding Area Slope %	3.0
Yes	Boarding Area XSlope %	1.1
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	1.9
Yes	PAR 1 XSlope %	1.6
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	1.9
Yes	PAR 2 XSlope %	0.7
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	2.2
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	47.0
Yes	Clear Floor Space Length (in)	66.0
Yes	Clear Floor Space Slope %	1.5
Yes	Clear Floor Space XSlope %	1.4
N/A	Alcove Condition?	Yes
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	94.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

