


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10035412	Main Street: RANDOLPH_RD	Cross Street: N/A	Location: E
ADA ID: 16FF17EF21C6	Overall Compliance: No	Severity Score: 20	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

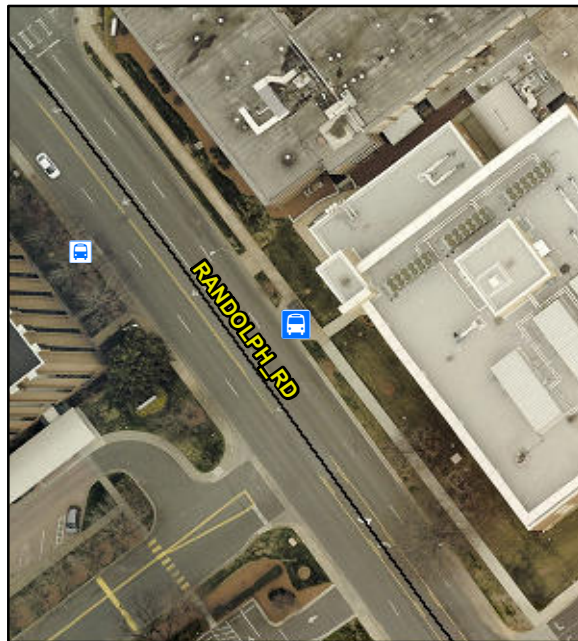

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove & Replace
Clear Floor Space. Remove or
Relocate Protruding
Objects/Obstructions.**

Surveyor Notes:

N/A

PROW/ADA:

**305.2, 402.2, 810.2.3, 810.2.4, 810.3,
R302, R302.6, R308.1.1.2, R404.1,
R404.2**

CATS Stop ID: 23590

CATS Stop Description: **Randolph Rd & Caswell Rd**

CATS Route ID: 15, 61x, 62x

CATS Route Name: **Multiple**

Total Cost: \$ 3950.00

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	96.0
No	Boarding Area Slope %	4.0
No	Boarding Area XSlope %	2.3
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	77.5
No	PAR 1 Slope %	2.6
Yes	PAR 1 XSlope %	2.0
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	77.5
Yes	PAR 2 Slope %	0.8
Yes	PAR 2 XSlope %	1.9
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.8
N/A	Shelter	Yes
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	60.0
Yes	Clear Floor Space Length (in)	64.0
No	Clear Floor Space Slope %	2.7
Yes	Clear Floor Space XSlope %	1.3
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	88.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

