


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 16132	Main Street: S_TRYON_ST	Cross Street: W_CAMA_ST	Location: W
ADA ID: 220277176F35	Overall Compliance: No	Severity Score: 35	

Codes/Mitigation Info/Possible Solution	Field Measurements/Component Compliance
---	---

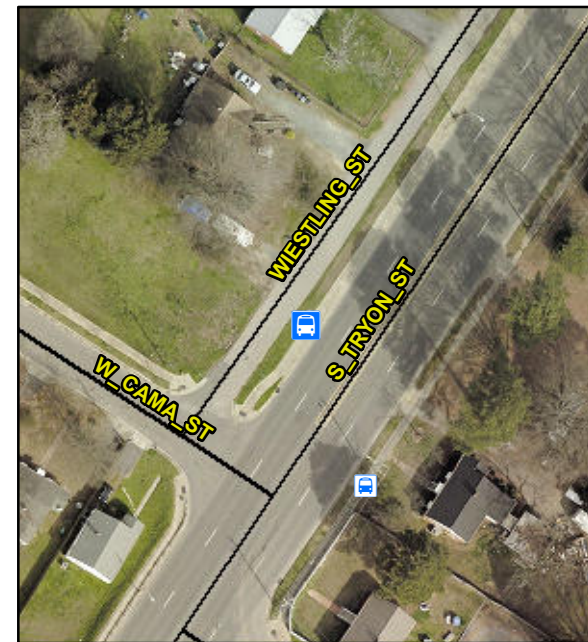

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove & Replace
Clear Floor Space.**

Surveyor Notes:

N/A

PROW/ADA:

**305.2, 305.3, 402.2, 810.2.3, 810.2.4,
810.3, R302, R302.5, R302.6,
R308.1.1.2, R404.1, R404.2, R404.3**

CATS Stop ID: **26140**

CATS Stop Description: **Tryon St & Cama St**

CATS Route ID: **12, 16**

CATS Route Name: **Multiple**

Total Cost: \$ **2650.00**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	63.0
Yes	Boarding Area Length (in)	96.0
No	Boarding Area Slope %	3.7
Yes	Boarding Area XSlope %	3.1
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	72.0
Yes	PAR 1 Slope %	3.3
No	PAR 1 XSlope %	3.5
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	72.0
No	PAR 2 Slope %	4.6
No	PAR 2 XSlope %	3.2
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	3.7
N/A	Shelter	No
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	60
No	Clear Floor Space Length (in)	30
Yes	Clear Floor Space Slope %	1.9
No	Clear Floor Space XSlope %	3.3
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	97.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

