


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10041342	Main Street: WEST_BV	Cross Street: N/A	Location: N
ADA ID: 25B730EC87F3	Overall Compliance: No	Severity Score: 50	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

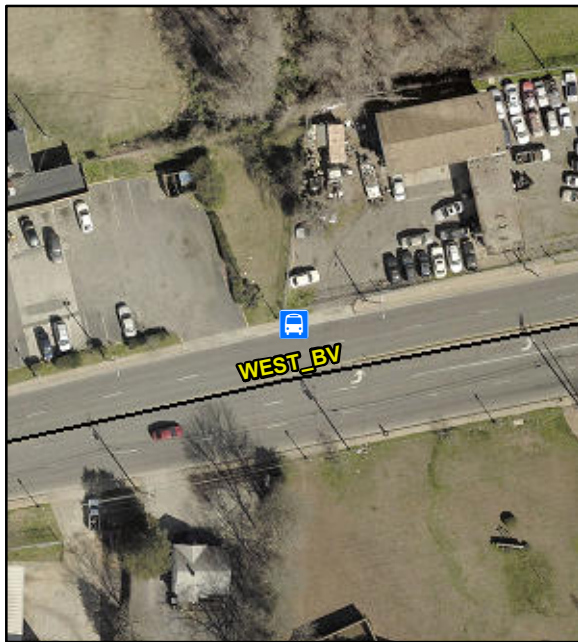

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 403.5.1, 810.2.2, 810.2.3,
810.2.4, R302, R302.3, R302.5,
R302.6, R308.1.1.1, R308.1.1.2**

CATS Stop ID: **34670**

CATS Stop Description: **West Blvd & Kenhill Dr**

CATS Route ID: **10, 235**

CATS Route Name: **Multiple**

Total Cost: \$ **2150.00**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
No	Boarding Area Length (in)	54.0
No	Boarding Area Slope %	8.3
Yes	Boarding Area XSlope %	0.3
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	48.0
Yes	PAR 1 Slope %	0.1
No	PAR 1 XSlope %	8.7
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
No	PAR 2 Width (in)	42.0
Yes	PAR 2 Slope %	1.3
No	PAR 2 XSlope %	2.8
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	0.2
N/A	Shelter	No
N/A	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	100.0
N/A	Bench?	No
Yes	Protruding Objects?	No

