


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10016181	Main Street: CENTRAL_AV	Cross Street: N/A	Location: N
ADA ID: 28FCD494C9A7	Overall Compliance: No	Severity Score: 25	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

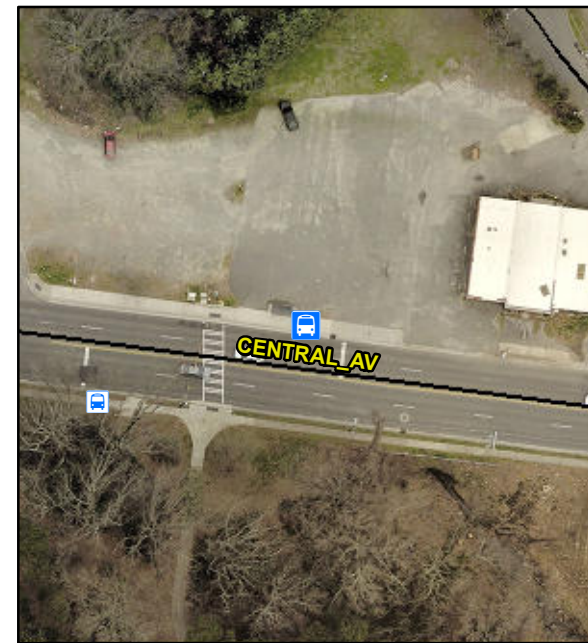

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove & Replace
Clear Floor Space.**

Surveyor Notes:

NO CATS ID LISTED

PROW/ADA:

**305.2, 305.3, 402.2, 810.2.3, 810.2.4,
810.3, R302, R302.5, R302.6,
R308.1.1.2, R404.1, R404.2, R404.3**

CATS Stop ID: 05240

CATS Stop Description: Central Ave & Tippah Park Ct

CATS Route ID: 9

CATS Route Name: Central Avenue

Total Cost: \$ 2650.00

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	96.0
Yes	Boarding Area Slope %	0.1
No	Boarding Area XSlope %	2.5
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	84.0
No	PAR 1 Slope %	2.5
Yes	PAR 1 XSlope %	0.1
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	84.0
No	PAR 2 Slope %	3.1
Yes	PAR 2 XSlope %	0.8
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	2.2
N/A	Shelter	Yes
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	49.0
No	Clear Floor Space Length (in)	39.0
Yes	Clear Floor Space Slope %	0.8
No	Clear Floor Space XSlope %	2.9
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	97.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

