


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10039773	Main Street: TODDVILLE_RD	Cross Street: N/A	Location: N
ADA ID: 2C7E53CBF89C	Overall Compliance: No	Severity Score: 45	

Codes/Mitigation Info/Possible Solution	Field Measurements/Component Compliance
---	---

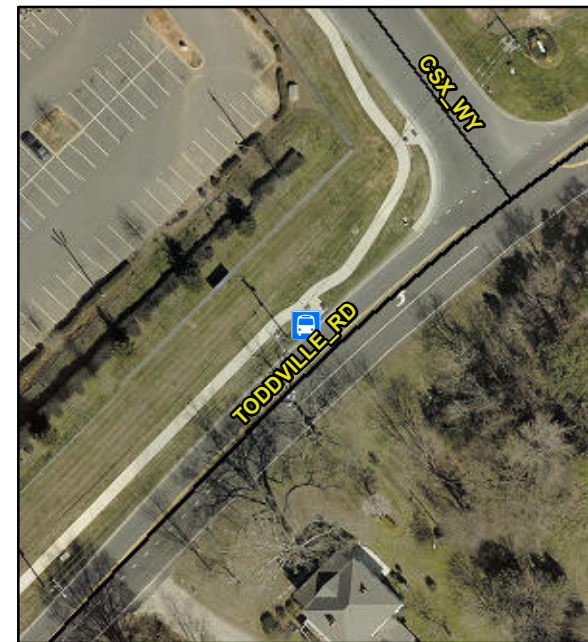

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Provide Clear Floor
Space. Remove or Relocate
Protruding Objects/Obstructions.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, 810.3, R302,
R302.5, R302.6, R308.1.1.2, R404.1**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	82.0
Yes	Boarding Area Length (in)	98.0
No	Boarding Area Slope %	3.3
No	Boarding Area XSlope %	2.3
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	73.0
No	PAR 1 Slope %	2.6
No	PAR 1 XSlope %	2.1
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	73.0
Yes	PAR 2 Slope %	1.4
Yes	PAR 2 XSlope %	1.9
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.0
N/A	Shelter	No
No	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	97.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: **46449**

CATS Stop Description: **Toddville Rd & CSX Way**

CATS Route ID: **18**

CATS Route Name: **Paw Creek / Rosa Parks**

Total Cost: \$ **3900.00**

