


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 16974	Main Street: PROVIDENCE_RD	Cross Street: SCOTLAND_AV	Location: SE
ADA ID: 414A8F14D279	Overall Compliance: No	Severity Score: 20	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

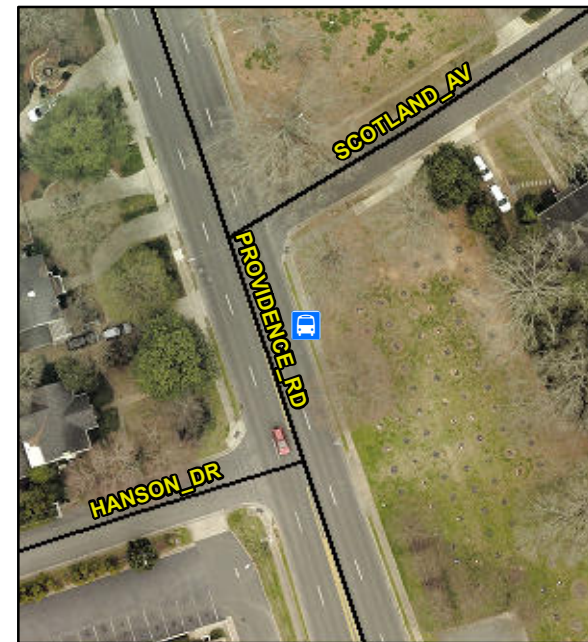

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Clear Floor
Space. Remove or Relocate
Protruding Objects/Obstructions.**

Surveyor Notes:

N/A

PROW/ADA:

**305.2, 810.2.4, 810.3, R308.1.1.2,
R404.1, R404.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	72.0
Yes	Boarding Area Length (in)	96.0
No	Boarding Area Slope %	2.5
Yes	Boarding Area XSlope %	1.4
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	48.0
Yes	PAR 1 Slope %	2.8
Yes	PAR 1 XSlope %	0.9
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	48.0
Yes	PAR 2 Slope %	3.0
Yes	PAR 2 XSlope %	0.6
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	4.9
N/A	Shelter	No
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	69.0
Yes	Clear Floor Space Length (in)	55.0
No	Clear Floor Space Slope %	3.3
Yes	Clear Floor Space XSlope %	1.1
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	94.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: 22370

CATS Stop Description: **Providence Rd & Scotland Ave**

CATS Route ID: 14

CATS Route Name: **Providence Road**

Total Cost: \$ 3250.00

