


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10025933	Main Street: ELLINGTON_ST	Cross Street: N/A	Location: W
ADA ID: 43DAC82188B6	Overall Compliance: No	Severity Score: 35	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

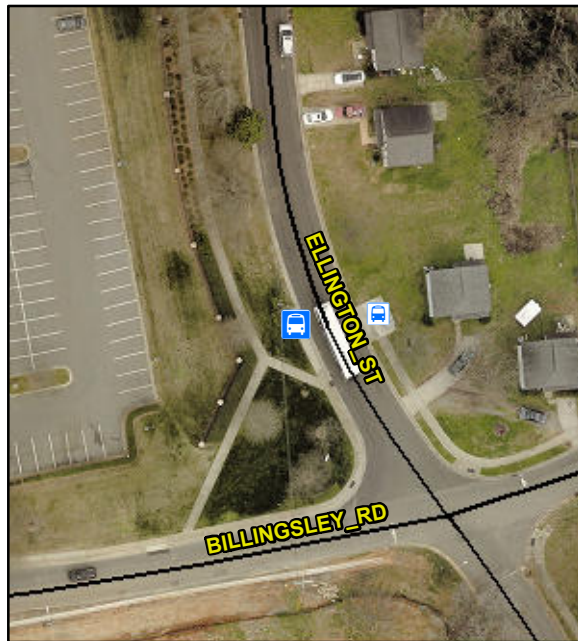

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove & Replace
Clear Floor Space.**

Surveyor Notes:

N/A

PROW/ADA:

**305.2, 402.2, 403.5.1, 810.2.3,
810.2.4, 810.3, R302, R302.3, R302.5,
R302.6, R308.1.1.2, R404.1, R404.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	96.0
No	Boarding Area Slope %	2.7
Yes	Boarding Area XSlope %	2.3
No	PAR 1 Exist?	Yes
No	PAR 1 Width (in)	47.0
No	PAR 1 Slope %	2.9
No	PAR 1 XSlope %	3.3
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
No	PAR 2 Width (in)	47.0
Yes	PAR 2 Slope %	1.1
No	PAR 2 XSlope %	2.9
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	2.5
N/A	Shelter	No
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	66.0
Yes	Clear Floor Space Length (in)	48.0
No	Clear Floor Space Slope %	4.6
Yes	Clear Floor Space XSlope %	1.4
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	98.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

CATS Stop ID: 09990

CATS Stop Description: Ellington St & Billingsley Rd

CATS Route ID: 15

CATS Route Name: Randolph Road

Total Cost: \$ 2650.00

