


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10035421	Main Street: RANDOLPH_RD	Cross Street: N/A	Location: W
ADA ID: 44C0ACEFCAA5	Overall Compliance: No	Severity Score: 15	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

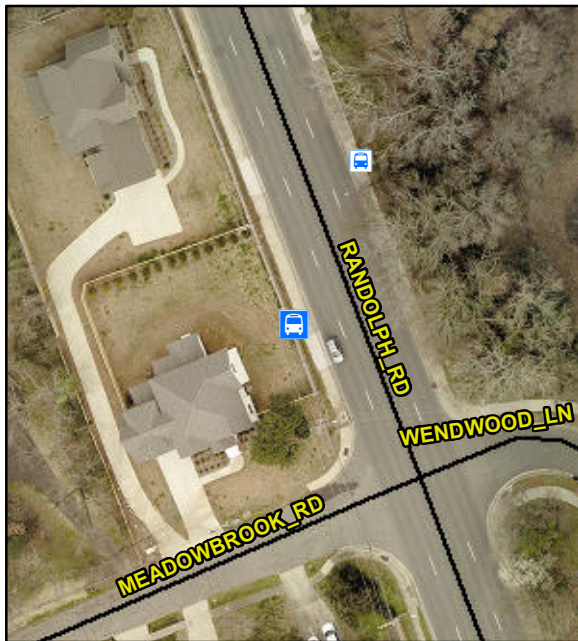

Possible Solutions:

Remove & Replace Clear Floor Space.

Surveyor Notes:

N/A

PROW/ADA:

305.2, 810.3, R404.1, R404.2

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	96.0
Yes	Boarding Area Slope %	1.0
Yes	Boarding Area XSlope %	0.5
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	65.0
Yes	PAR 1 Slope %	0.1
Yes	PAR 1 XSlope %	0.8
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	65.0
Yes	PAR 2 Slope %	0.9
Yes	PAR 2 XSlope %	1.8
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.0
N/A	Shelter	No
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	67.0
Yes	Clear Floor Space Length (in)	48.0
No	Clear Floor Space Slope %	3.3
Yes	Clear Floor Space XSlope %	0.3
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	97.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

CATS Stop ID: 23800

CATS Stop Description: **Randolph Rd & Meadowbrook Rd**

CATS Route ID: 15, 62x

CATS Route Name: **Multiple**

Total Cost: \$ 500.00

