


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10040201	Main Street: TYVOLA_RD	Cross Street: N/A	Location: S
ADA ID: 45544C72E71D	Overall Compliance: No	Severity Score: 10	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

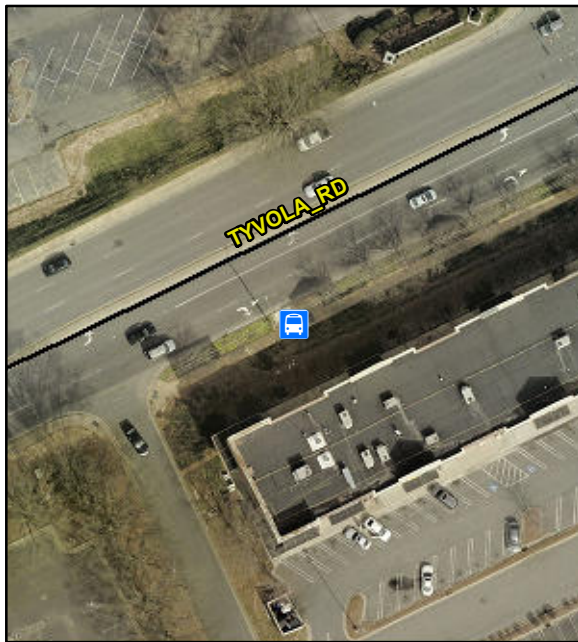

Possible Solutions:

Remove & Replace Sidewalk To Boarding Area. Remove or Relocate Protruding Objects/Obstructions.

Surveyor Notes:

N/A

PROW/ADA:

402.2, 810.2.3, R302, R302.5

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	101.0
Yes	Boarding Area Length (in)	102.0
Yes	Boarding Area Slope %	0.9
Yes	Boarding Area XSlope %	2.2
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	72.0
Yes	PAR 1 Slope %	2.1
Yes	PAR 1 XSlope %	1.1
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	72.0
No	PAR 2 Slope %	3.1
Yes	PAR 2 XSlope %	0.2
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	3.0
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	50.0
Yes	Clear Floor Space Length (in)	60.0
Yes	Clear Floor Space Slope %	1.9
Yes	Clear Floor Space XSlope %	0.2
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	93.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: 32890

CATS Stop Description: Tyvola Rd & 77 Center Dr

CATS Route ID: 60

CATS Route Name: Tyvola Road

Total Cost: \$ 2700.00

