


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 11659	Main Street: E_16TH_ST	Cross Street: N_DAVIDSON_ST	Location: W
ADA ID: 4A31A33B9025	Overall Compliance: No	Severity Score: 25	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

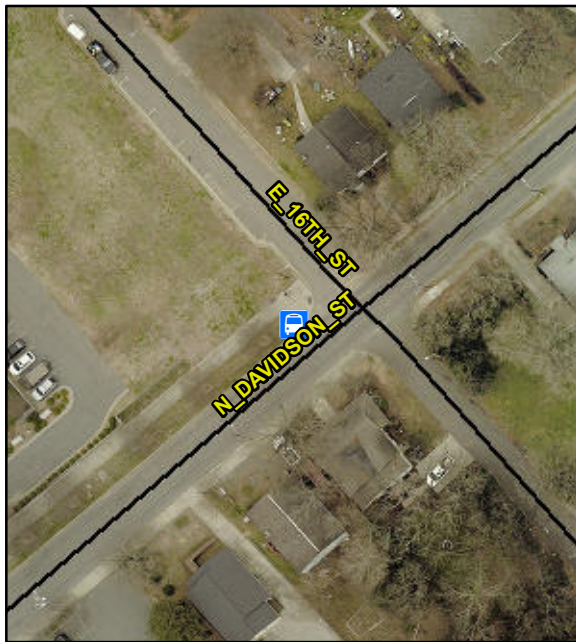

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove & Replace
Clear Floor Space. Remove or
Relocate Protruding
Objects/Obstructions.**

Surveyor Notes:

**FIRE HYDRANT IN BOARDING
AREA**

PROW/ADA:

**305.2, 402.2, 810.2.2, 810.2.3,
810.2.4, 810.3, R302, R302.5, R302.6,
R308.1.1.1, R308.1.1.2, R404.1,
R404.2**

CATS Stop ID: 17340
CATS Stop Description: Davidson St & 16th St
CATS Route ID: 23
CATS Route Name: Shamrock Drive

Total Cost: \$ 4650.00

Compliance	Description	Data
Yes	Boarding Area	Yes
No	Boarding Area Width (in)	57.0
Yes	Boarding Area Length (in)	96.0
No	Boarding Area Slope %	6.7
Yes	Boarding Area XSlope %	1.5
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	96.0
Yes	PAR 1 Slope %	1.0
No	PAR 1 XSlope %	2.4
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	96.0
Yes	PAR 2 Slope %	0.0
No	PAR 2 XSlope %	2.5
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.8
N/A	Shelter	No
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	48.0
Yes	Clear Floor Space Length (in)	48.0
No	Clear Floor Space Slope %	3.3
Yes	Clear Floor Space XSlope %	1.4
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	96.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

