


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10032791	Main Street: N_WENDOVER_RD	Cross Street: N/A	Location: N
ADA ID: 4B5B361F2D24	Overall Compliance: No	Severity Score: 5	

Codes/Mitigation Info/Possible Solution	Field Measurements/Component Compliance
---	---

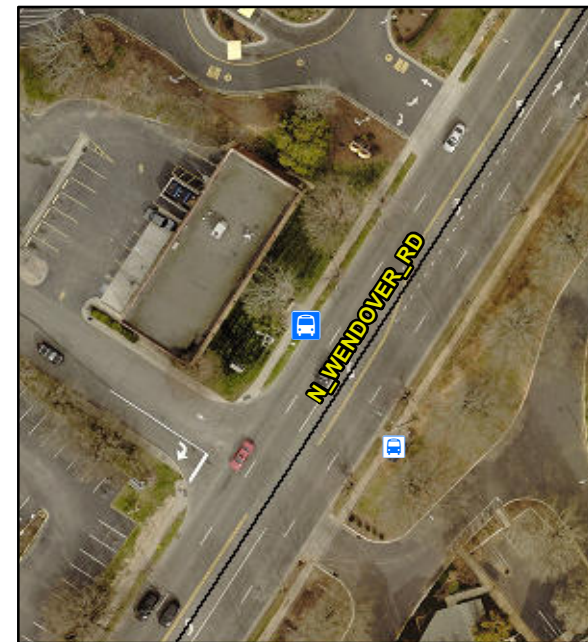

Possible Solutions:

Remove & Replace Sidewalk To Boarding Area. Remove or Relocate Protruding Objects/Obstructions.

Surveyor Notes:

N/A

PROW/ADA:

402.2, 810.2.3, R302, R302.5, R302.6

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	120.0
Yes	Boarding Area Length (in)	96.0
Yes	Boarding Area Slope %	0.7
Yes	Boarding Area XSlope %	0.1
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	0.0
No	PAR 1 XSlope %	2.4
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	0.6
No	PAR 2 XSlope %	3.1
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	0.2
N/A	Shelter	No
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	48.0
Yes	Clear Floor Space Length (in)	65.0
Yes	Clear Floor Space Slope %	1.8
Yes	Clear Floor Space XSlope %	0.5
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	89.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: 43530

CATS Stop Description: **Wendover Rd & Latrobe Dr**

CATS Route ID: 39

CATS Route Name: **Eastway Drive**

Total Cost: \$ 3400.00

