


# Access Compliance Report Public Rights-of-Way (Transit Stops)

|                                         |                         |                                         |             |
|-----------------------------------------|-------------------------|-----------------------------------------|-------------|
| Intersection ID: 10037024               | Main Street: S_TRYON_ST | Cross Street: N/A                       | Location: W |
| ADA ID: 4C6524230D58                    | Overall Compliance: No  | Severity Score: 45                      |             |
| Codes/Mitigation Info/Possible Solution |                         | Field Measurements/Component Compliance |             |

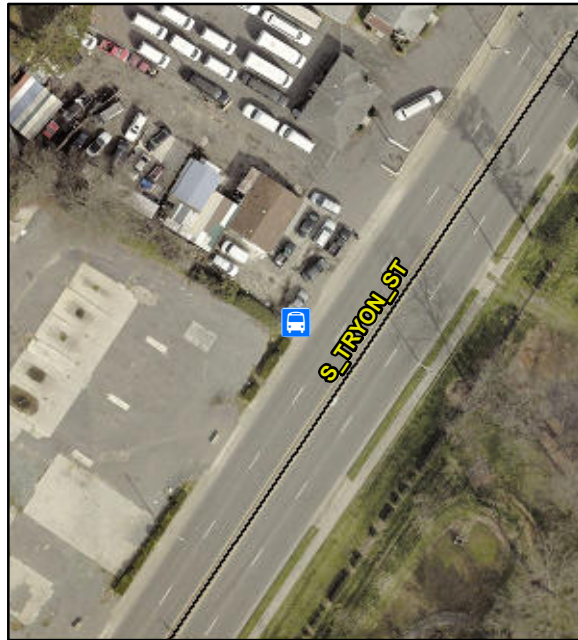

Possible Solutions:

**Remove & Replace Boarding Area.  
Remove & Replace Sidewalk To  
Boarding Area.**

Surveyor Notes:

**N/A**

PROW/ADA:

**402.2, 403.5.1, 810.2.2, 810.2.3, R302,  
R302.3, R302.6, R308.1.1.1**

| Compliance | Description                     | Data  |
|------------|---------------------------------|-------|
| Yes        | Boarding Area                   | Yes   |
| Yes        | Boarding Area Width (in)        | 60.0  |
| No         | Boarding Area Length (in)       | 45.0  |
| Yes        | Boarding Area Slope %           | 1.2   |
| Yes        | Boarding Area XSlope %          | 1.6   |
| No         | PAR 1 Exist?                    | Yes   |
| No         | PAR 1 Width (in)                | 45.0  |
| Yes        | PAR 1 Slope %                   | 0.6   |
| Yes        | PAR 1 XSlope %                  | 1.5   |
| N/A        | PAR 1 XSlope Location           | Perp  |
| No         | PAR 2 Exist?                    | Yes   |
| No         | PAR 2 Width (in)                | 45.0  |
| Yes        | PAR 2 Slope %                   | 1.8   |
| No         | PAR 2 XSlope %                  | 2.8   |
| N/A        | PAR 2 XSlope Location           | Perp  |
| Yes        | Boarding Area Connected to PAR? | Yes   |
| N/A        | Road Slope %                    | 1.7   |
| N/A        | Shelter                         | No    |
| N/A        | Clear Floor Space               | No    |
| N/A        | Clear Floor Space Shelter       | No    |
| N/A        | Clear Floor Space Width (in)    | N/A   |
| N/A        | Clear Floor Space Length (in)   | N/A   |
| N/A        | Clear Floor Space Slope %       | N/A   |
| N/A        | Clear Floor Space XSlope %      | N/A   |
| N/A        | Alcove Condition?               | No    |
| Yes        | Transit Sign?                   | Yes   |
| Yes        | Transit Sign Height (in)        | 100.0 |
| N/A        | Bench?                          | No    |
| Yes        | Protruding Objects?             | No    |

CATS Stop ID: **26160**

CATS Stop Description: **Tryon St & Peterson Dr**

CATS Route ID: **12, 16**

CATS Route Name: **Multiple**

Total Cost: \$ **2150.00**

