


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10036888	Main Street: S_MCDOWELL_ST	Cross Street: N/A	Location: S
ADA ID: 4F1688E5D221	Overall Compliance: No	Severity Score: 10	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

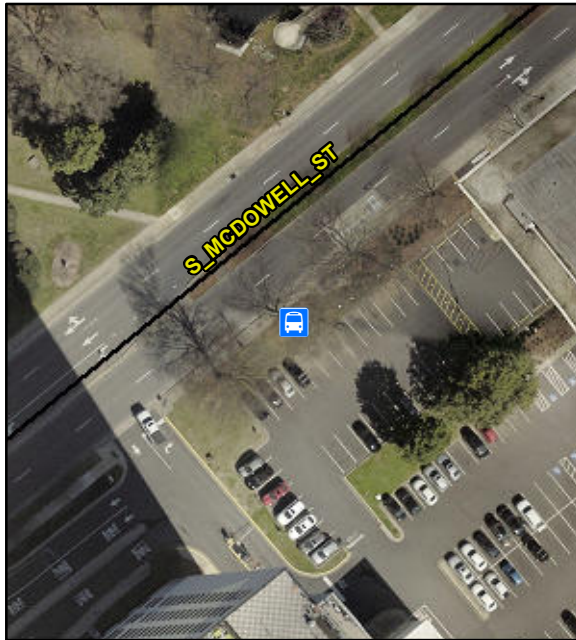

Possible Solutions:

Remove & Replace Boarding Area.

Surveyor Notes:

N/A

PROW/ADA:

810.2.2, R308.1.1.1

CATS Stop ID: **25530**

CATS Stop Description: **McDowell St & 3rd St**

CATS Route ID: **20, 6**

CATS Route Name: **Multiple**

Total Cost: \$ **750.00**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	64.0
No	Boarding Area Length (in)	74.0
Yes	Boarding Area Slope %	0.3
Yes	Boarding Area XSlope %	1.3
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	64.0
Yes	PAR 1 Slope %	0.2
Yes	PAR 1 XSlope %	1.3
N/A	PAR 1 XSlope Location	Perp
N/A	PAR 2 Exist?	No
N/A	PAR 2 Width (in)	N/A
N/A	PAR 2 Slope %	N/A
N/A	PAR 2 XSlope %	N/A
N/A	PAR 2 XSlope Location	N/A
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	0.8
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	48.0
Yes	Clear Floor Space Length (in)	62.0
Yes	Clear Floor Space Slope %	0.1
Yes	Clear Floor Space XSlope %	0.2
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	95.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

