


Access Compliance Report

Public Rights-of-Way

(Transit Stops)

Intersection ID: 10014548	Main Street: N_TRYON_ST	Cross Street: N/A	Location: N
ADA ID: 534CC2183D69	Overall Compliance: No	Severity Score: 10	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

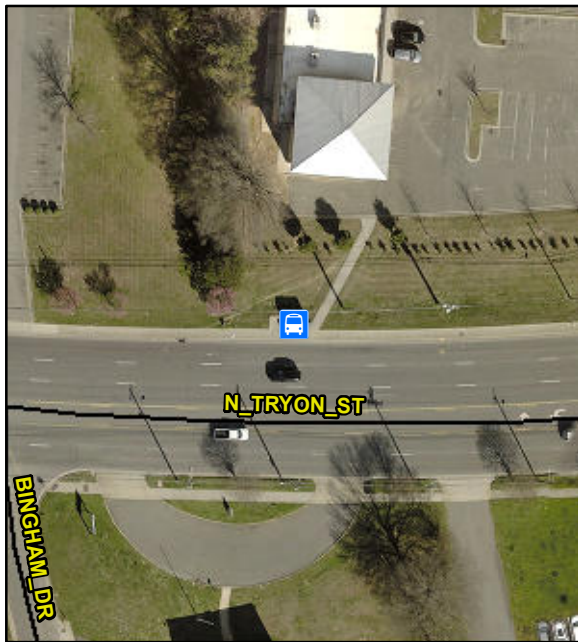

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove or Relocate
Protruding Objects/Obstructions.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, R302, R302.5,
R308.1.1.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	96.0
No	Boarding Area Slope %	2.6
Yes	Boarding Area XSlope %	1.9
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	1.9
No	PAR 1 XSlope %	2.6
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	1.9
Yes	PAR 2 XSlope %	2.0
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	2.1
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	68.0
Yes	Clear Floor Space Length (in)	60.0
Yes	Clear Floor Space Slope %	0.4
Yes	Clear Floor Space XSlope %	1.6
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	90.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: 18770

CATS Stop Description: Tryon St & Bingham Dr

CATS Route ID: 11

CATS Route Name: North Tryon

Total Cost: \$ 3450.00

