


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10036588	Main Street: RUNNYMEDE_LN	Cross Street: N/A	Location: E
ADA ID: 5CE54E5407DE	Overall Compliance: No	Severity Score: 40	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

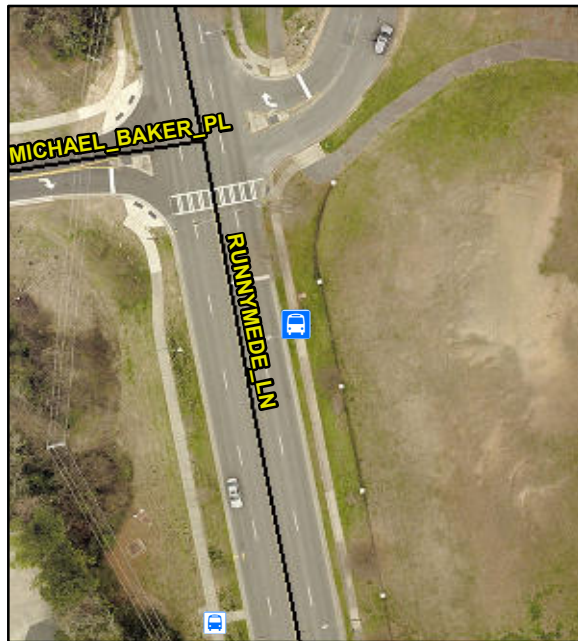

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Clear Floor
Space.**

Surveyor Notes:

N/A

PROW/ADA:

**305.2, 305.3, 810.2.2, 810.2.4, 810.3,
R308.1.1.1, R308.1.1.2, R404.1,
R404.2, R404.3**

Compliance	Description	Data
Yes	Boarding Area	Yes
No	Boarding Area Width (in)	59.0
Yes	Boarding Area Length (in)	96.0
No	Boarding Area Slope %	7.8
No	Boarding Area XSlope %	4.5
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	59.0
Yes	PAR 1 Slope %	2.3
Yes	PAR 1 XSlope %	1.7
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	59.0
Yes	PAR 2 Slope %	2.8
Yes	PAR 2 XSlope %	0.7
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	3.3
N/A	Shelter	Yes
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	117.0
No	Clear Floor Space Length (in)	36.0
Yes	Clear Floor Space Slope %	0.4
No	Clear Floor Space XSlope %	3.4
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	86.0
N/A	Bench?	No
Yes	Protruding Objects?	No

CATS Stop ID: 25220

CATS Stop Description: Runnymede Ln & Barclay Downs Dr

CATS Route ID: 20, 30

CATS Route Name: Multiple

Total Cost: \$ 1250.00

