


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10020377	Main Street: BALLANTYNE_CORPORATE_PL	Cross Street: N/A	Location: S
ADA ID: 70A54ACD1AF0	Overall Compliance: No	Severity Score: 35	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

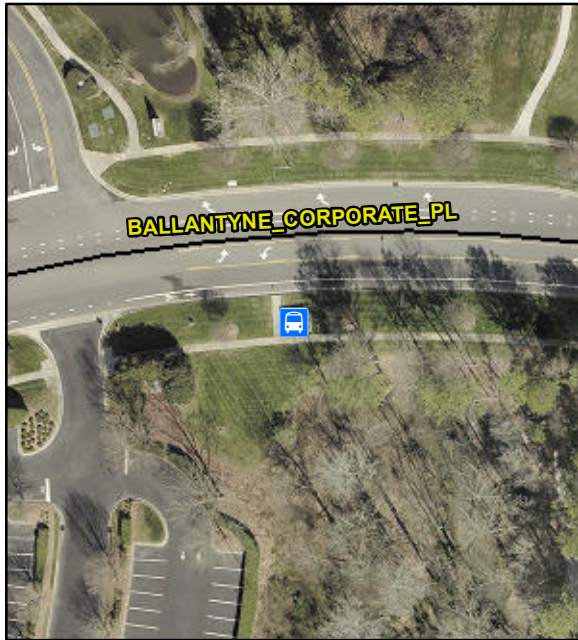

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 403.5.1, 810.2.2, 810.2.3,
810.2.4, R302, R302.3, R302.5,
R302.6, R308.1.1.1, R308.1.1.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
No	Boarding Area Width (in)	58.0
No	Boarding Area Length (in)	58.0
No	Boarding Area Slope %	5.6
Yes	Boarding Area XSlope %	1.5
No	PAR 1 Exist?	Yes
No	PAR 1 Width (in)	47.0
No	PAR 1 Slope %	2.4
No	PAR 1 XSlope %	2.8
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
No	PAR 2 Width (in)	47.0
Yes	PAR 2 Slope %	2.0
No	PAR 2 XSlope %	3.0
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.2
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	64.0
Yes	Clear Floor Space Length (in)	58.0
Yes	Clear Floor Space Slope %	0.4
Yes	Clear Floor Space XSlope %	0.5
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	94.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

CATS Stop ID: 46331

CATS Stop Description: Ballantyne Corporate Pl & Johnston Rd

CATS Route ID: 43

CATS Route Name: Ballantyne

Total Cost: \$ 2150.00

