


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10037008	Main Street: S_TRYON_ST	Cross Street: N/A	Location: E
ADA ID: 74915057BC0B	Overall Compliance: No	Severity Score: 55	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

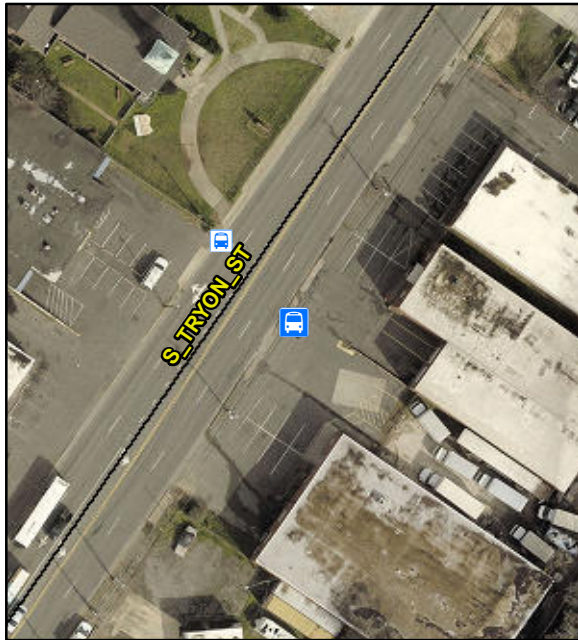

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove or Relocate
Protruding Objects/Obstructions.**

Surveyor Notes:

NO CATS ID LISTED

PROW/ADA:

**402.2, 810.2.2, 810.2.3, 810.2.4, R302,
R302.5, R302.6, R308.1.1.1,
R308.1.1.2**

CATS Stop ID: 26030

CATS Stop Description: Tryon St & Remount Rd

CATS Route ID: 16

CATS Route Name: South Tryon

Total Cost: \$ 4150.00

Compliance	Description	Data
Yes	Boarding Area	Yes
No	Boarding Area Width (in)	37.0
No	Boarding Area Length (in)	72.0
No	Boarding Area Slope %	7.8
Yes	Boarding Area XSlope %	0.2
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	1.4
No	PAR 1 XSlope %	6.1
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	2.9
No	PAR 2 XSlope %	7.5
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	3.3
N/A	Shelter	No
N/A	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	95.0
N/A	Bench?	No
No	Protruding Objects?	Yes

