


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10020726	Main Street: BEATTIES_FORD_RD	Cross Street: N/A	Location: NW
ADA ID: 757381B069D2	Overall Compliance: No	Severity Score: 15	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

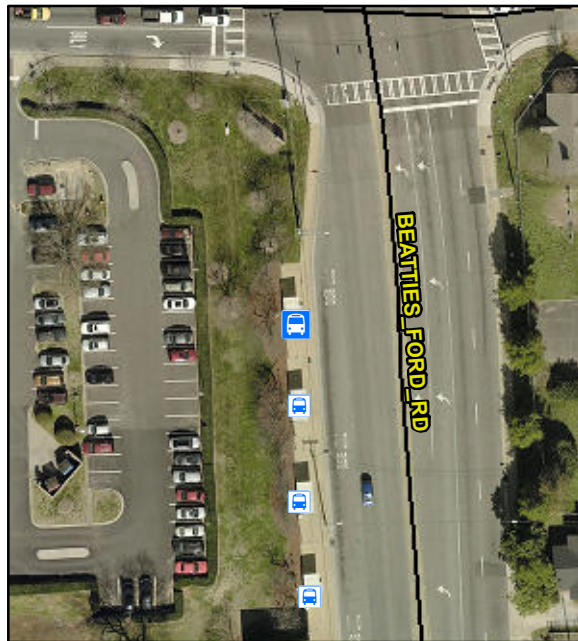

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove & Replace
Clear Floor Space. Remove or
Relocate Protruding
Objects/Obstructions. Provide**

Surveyor Notes:

**NO CATS ID LISTED AT TRANSIT
STOP**

PROW/ADA:

**305.2, 402.2, 703.5.1, 810.2.3,
810.2.4, 810.3, R302, R302.5, R302.6,
R308.1.1.2, R404.1, R404.2, R410.6**

CATS Stop ID: **45112**

CATS Stop Description: **Beatties Ford Rd & Rosa Parks PI (Bay C)**

CATS Route ID: **26, 7**

CATS Route Name: **Multiple**

Total Cost: \$ **5150.00**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	168.0
Yes	Boarding Area Length (in)	180.0
No	Boarding Area Slope %	2.1
Yes	Boarding Area XSlope %	1.3
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	1.3
No	PAR 1 XSlope %	2.1
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	58.0
Yes	PAR 2 Slope %	0.2
No	PAR 2 XSlope %	2.6
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	2.1
N/A	Shelter	Yes
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	84.0
Yes	Clear Floor Space Length (in)	72.0
Yes	Clear Floor Space Slope %	1.0
No	Clear Floor Space XSlope %	2.7
N/A	Alcove Condition?	Yes
No	Transit Sign?	No
N/A	Transit Sign Height (in)	N/A
N/A	Bench?	Yes
No	Protruding Objects?	Yes

