


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10036974	Main Street: S_TRYON_ST	Cross Street: N/A	Location: S
ADA ID: 8A7C3985544B	Overall Compliance: No	Severity Score: 25	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

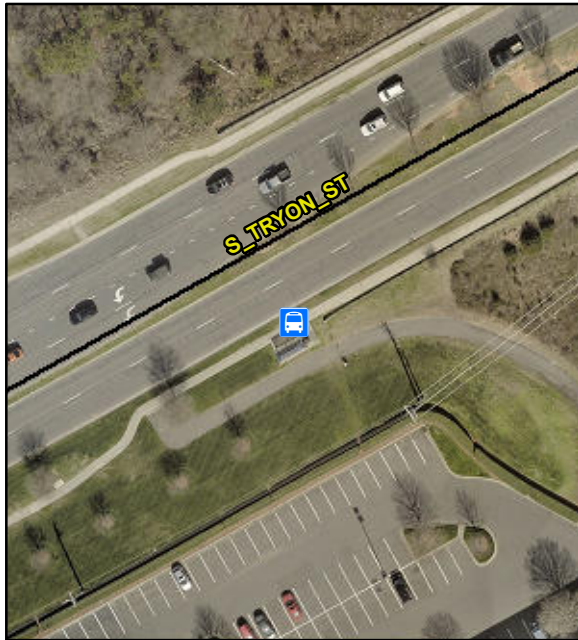

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Clear Floor
Space.**

Surveyor Notes:

N/A

PROW/ADA:

**305.2, 810.2.4, 810.3, R308.1.1.2,
R404.1, R404.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	114.0
No	Boarding Area Slope %	7.4
Yes	Boarding Area XSlope %	0.7
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	0.8
Yes	PAR 1 XSlope %	1.4
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	0.6
Yes	PAR 2 XSlope %	1.3
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	0.9
N/A	Shelter	Yes
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	54.0
Yes	Clear Floor Space Length (in)	68.0
No	Clear Floor Space Slope %	3.1
Yes	Clear Floor Space XSlope %	0.3
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	93.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

CATS Stop ID: 46324

CATS Stop Description: Tryon St & Rivergate Pkwy

CATS Route ID: 16

CATS Route Name: South Tryon

Total Cost: \$ 1250.00

