


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 53147	Main Street: ACHIEVEMENT_LN	Cross Street: NEW_RENAISSANCE_WY	Location: W
ADA ID: 95139EEABE5D	Overall Compliance: No	Severity Score: 55	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

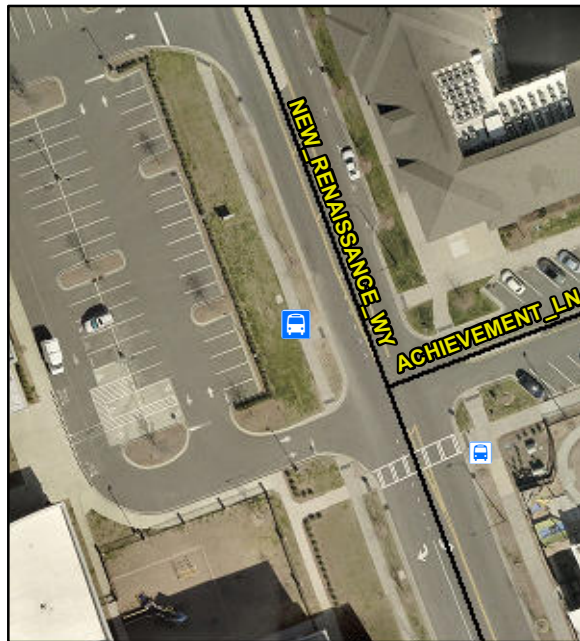

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Provide Clear Floor
Space.**

Surveyor Notes:

BOARDING AREA IS RAMP

PROW/ADA:

**402.2, 810.2.2, 810.2.3, 810.2.4,
810.3, R302, R302.6, R308.1.1.1,
R308.1.1.2, R404.1**

CATS Stop ID: **40005**

CATS Stop Description: **New Renaissance Way & West Blvd**

CATS Route ID: **10, 235**

CATS Route Name: **Multiple**

Total Cost: \$ **1900.00**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	70.0
No	Boarding Area Length (in)	83.0
No	Boarding Area Slope %	9.7
No	Boarding Area XSlope %	5.1
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	55.0
No	PAR 1 Slope %	2.1
Yes	PAR 1 XSlope %	1.8
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	71.0
Yes	PAR 2 Slope %	1.6
Yes	PAR 2 XSlope %	1.5
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	2.0
N/A	Shelter	No
No	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	97.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

