


Access Compliance Report

Public Rights-of-Way

(Transit Stops)

Intersection ID: 12879	Main Street: HICKORY_GROVE_RD	Cross Street: N_SHARON_AMITY_RD	Location: E
ADA ID: 96BBC30458E7	Overall Compliance: No	Severity Score: 40	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

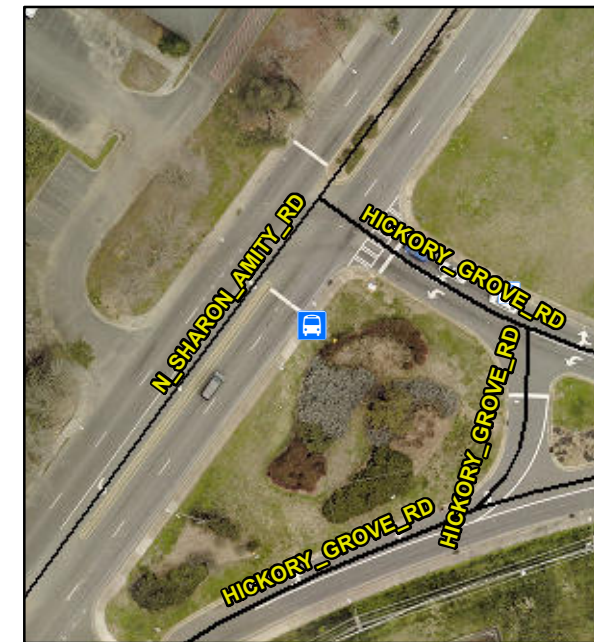

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.2, 810.2.3, R302, R302.6,
R308.1.1.1**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
No	Boarding Area Length (in)	66.0
Yes	Boarding Area Slope %	1.7
Yes	Boarding Area XSlope %	2.0
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	2.0
Yes	PAR 1 XSlope %	1.7
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	1.9
No	PAR 2 XSlope %	2.4
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.7
N/A	Shelter	No
N/A	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	94.0
N/A	Bench?	No
Yes	Protruding Objects?	No

CATS Stop ID: 28050

CATS Stop Description: Sharon Amity Rd & Hickory Grove Rd

CATS Route ID: 29

CATS Route Name: UNCC / JW Clay

Total Cost: \$ 1450.00

