


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10025611	Main Street: E_WOODLAWN_RD	Cross Street: N/A	Location: S
ADA ID: 97E3C30C655E	Overall Compliance: No	Severity Score: 60	

Codes/Mitigation Info/Possible Solution	Field Measurements/Component Compliance
---	---

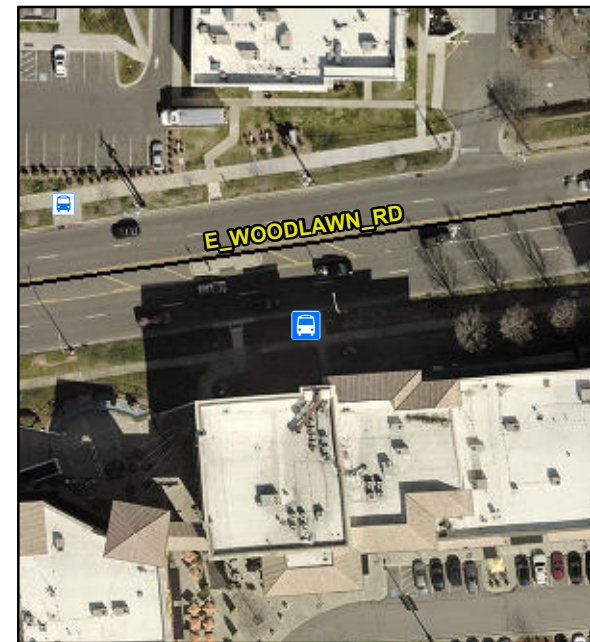

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Provide Clear Floor
Space.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.2, 810.2.3, 810.2.4,
810.3, R302.5, R308.1.1.1,
R308.1.1.2, R404.1**

Compliance	Description	Data
Yes	Boarding Area	Yes
No	Boarding Area Width (in)	57.0
Yes	Boarding Area Length (in)	146.0
No	Boarding Area Slope %	11.7
Yes	Boarding Area XSlope %	2.9
Yes	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	59.0
Yes	PAR 1 Slope %	3.4
Yes	PAR 1 XSlope %	1.4
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	59.0
No	PAR 2 Slope %	4.0
Yes	PAR 2 XSlope %	0.2
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	3.5
N/A	Shelter	No
No	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	96.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

CATS Stop ID: 35800

CATS Stop Description: Woodlawn Rd & Parktowne Village Dr

CATS Route ID: 30

CATS Route Name: Woodlawn Crosstown

Total Cost: \$ 1900.00

