


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10012158	Main Street: E_W_T_HARRIS_BV	Cross Street: N/A	Location: W
ADA ID: 9A532A93FA84	Overall Compliance: No	Severity Score: 25	

Codes/Mitigation Info/Possible Solution	Field Measurements/Component Compliance
---	---

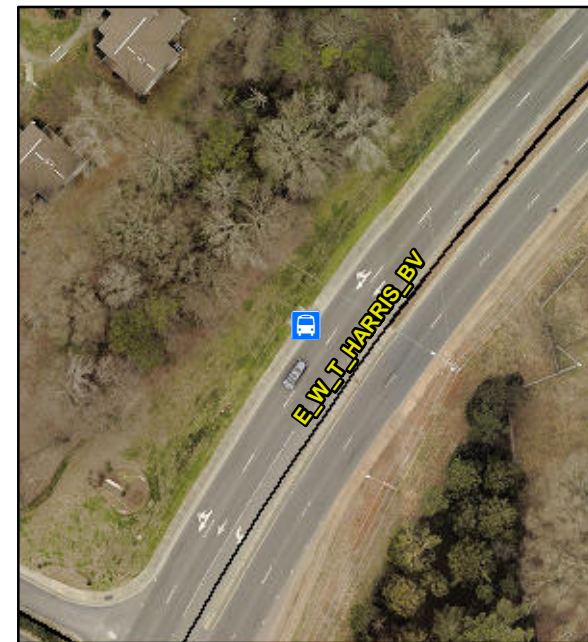

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove & Replace
Clear Floor Space.**

Surveyor Notes:

N/A

PROW/ADA:

**305.2, 402.2, 810.2.3, 810.2.4, 810.3,
R302, R302.5, R302.6, R308.1.1.2,
R404.1, R404.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	113.0
No	Boarding Area Slope %	2.9
Yes	Boarding Area XSlope %	1.0
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	1.0
No	PAR 1 XSlope %	2.9
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	0.1
No	PAR 2 XSlope %	2.2
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	0.6
N/A	Shelter	No
No	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	70.0
Yes	Clear Floor Space Length (in)	48.0
No	Clear Floor Space Slope %	4.5
Yes	Clear Floor Space XSlope %	1.7
N/A	Alcove Condition?	Yes
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	97.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

CATS Stop ID: **45225**

CATS Stop Description: **WT Harris Blvd & Delta Crossing Ln**

CATS Route ID: **3**

CATS Route Name: **The Plaza**

Total Cost: \$ **2650.00**

