


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10033115	Main Street: NORTHLAKE CENTRE PY	Cross Street: POINT O'WOODS DR	Location: SE
ADA ID: 9D8471625A3D	Overall Compliance: No	Severity Score: 50	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

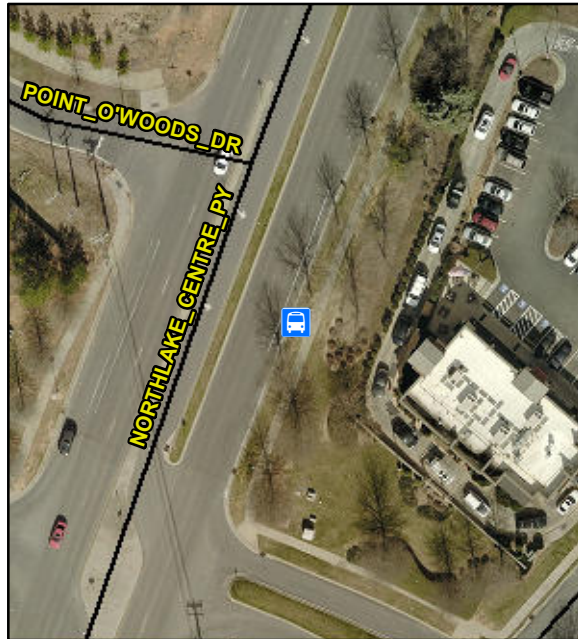

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Provide Clear Floor
Space.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, 810.3, R302,
R302.5, R302.6, R308.1.1.2, R404.1**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	96.0
Yes	Boarding Area Length (in)	120.0
No	Boarding Area Slope %	2.3
Yes	Boarding Area XSlope %	2.5
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	0.9
No	PAR 1 XSlope %	2.9
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
No	PAR 2 Slope %	3.5
No	PAR 2 XSlope %	4.3
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	3.0
N/A	Shelter	No
No	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	90.0
N/A	Bench?	Yes
Yes	Protruding Objects?	No

CATS Stop ID: **46439**

CATS Stop Description: **Northlake Centre Pkwy & Point O'Woods Dr**

CATS Route ID: **53x, 7, 99**

CATS Route Name: **Multiple**

Total Cost: \$ **2600.00**

