


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10034513	Main Street: PINEVILLE-MATTHEWS_RD	Cross Street: N/A	Location: N
ADA ID: A1949712FB55	Overall Compliance: No	Severity Score: 40	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

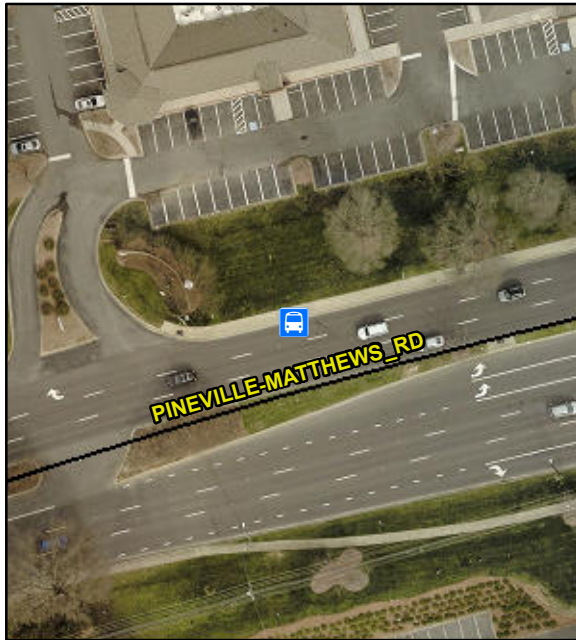

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area.**

Surveyor Notes:

CATS ID PARTIALLY ILLEGIBLE

PROW/ADA:

**402.2, 810.2.2, 810.2.3, R302, R302.5,
R308.1.1.1**

CATS Stop ID: **49414**

CATS Stop Description: **Pineville-Matthews Rd & Providence Rd**

CATS Route ID: **51**

CATS Route Name: **Pineville-Matthews Road**

Total Cost: \$ **1450.00**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
No	Boarding Area Length (in)	60.0
Yes	Boarding Area Slope %	0.9
Yes	Boarding Area XSlope %	0.9
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	0.6
No	PAR 1 XSlope %	2.1
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	0.9
Yes	PAR 2 XSlope %	2.0
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.9
N/A	Shelter	No
N/A	Clear Floor Space	No
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	N/A
N/A	Clear Floor Space Length (in)	N/A
N/A	Clear Floor Space Slope %	N/A
N/A	Clear Floor Space XSlope %	N/A
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	93.0
N/A	Bench?	No
Yes	Protruding Objects?	No

