


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 16310	Main Street: LYNNVILLE_AV	Cross Street: N_SHARON_AMITY_RD	Location: NE
ADA ID: ABC703DF3AFC	Overall Compliance: No	Severity Score: 10	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

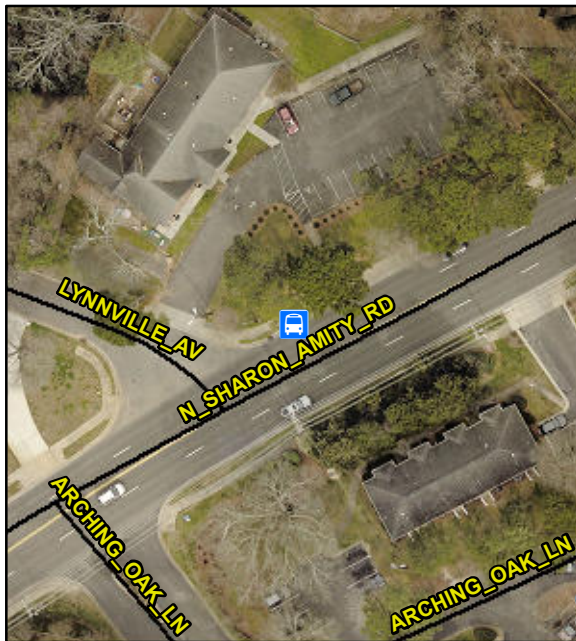

Possible Solutions:

Remove & Replace Sidewalk To Boarding Area. Remove or Relocate Protruding Objects/Obstructions.

Surveyor Notes:

N/A

PROW/ADA:

402.2, 810.2.3, R302, R302.5, R302.6

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	113.0
Yes	Boarding Area Length (in)	96.0
Yes	Boarding Area Slope %	1.3
Yes	Boarding Area XSlope %	1.4
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	1.2
No	PAR 1 XSlope %	3.4
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
No	PAR 2 Slope %	2.2
No	PAR 2 XSlope %	4.9
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.3
N/A	Shelter	No
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
Yes	Clear Floor Space Width (in)	115.0
Yes	Clear Floor Space Length (in)	48.0
Yes	Clear Floor Space Slope %	1.3
Yes	Clear Floor Space XSlope %	0.1
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	95.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: 42305

CATS Stop Description: Sharon Amity Rd & Lynnville Ave

CATS Route ID: 28

CATS Route Name: Fariview Road

Total Cost: \$ 3400.00

