


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10012988	Main Street: EASTWAY_DR	Cross Street: N/A	Location: W
ADA ID: B27EB351B95D	Overall Compliance: No	Severity Score: 10	

Codes/Mitigation Info/Possible Solution	Field Measurements/Component Compliance
---	---

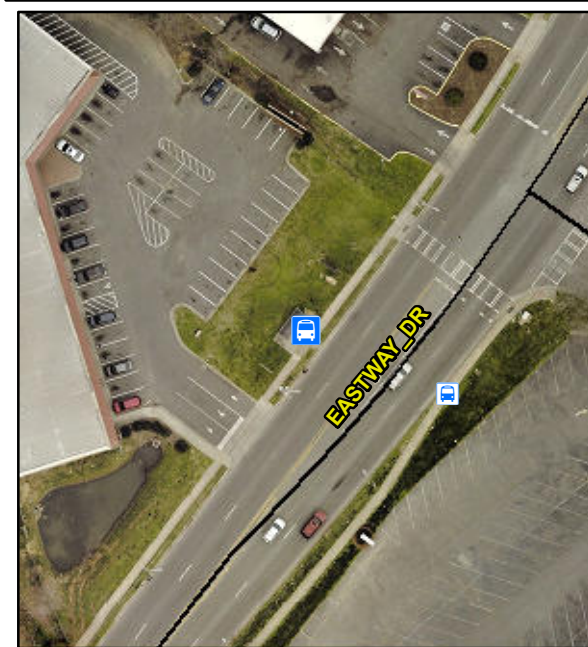

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove or Relocate
Protruding Objects/Obstructions.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, R302, R302.5,
R302.6, R308.1.1.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	108.0
Yes	Boarding Area Slope %	2.0
No	Boarding Area XSlope %	3.0
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
No	PAR 1 Slope %	2.9
No	PAR 1 XSlope %	2.1
N/A	PAR 1 XSlope Location	Perp
Yes	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	1.9
Yes	PAR 2 XSlope %	1.8
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	0.6
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	108.0
Yes	Clear Floor Space Length (in)	65.0
Yes	Clear Floor Space Slope %	1.9
Yes	Clear Floor Space XSlope %	0.7
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	94.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: 08900

CATS Stop Description: Eastway Dr @ CMC Northpark

CATS Route ID: 39

CATS Route Name: Eastway Drive

Total Cost: \$ 3450.00

