


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10041619	Main Street: WHITEHALL_COMMONS_CENTER_DR	Cross Street: N/A	Location: N
ADA ID: B5FA68879F43	Overall Compliance: No	Severity Score: 15	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

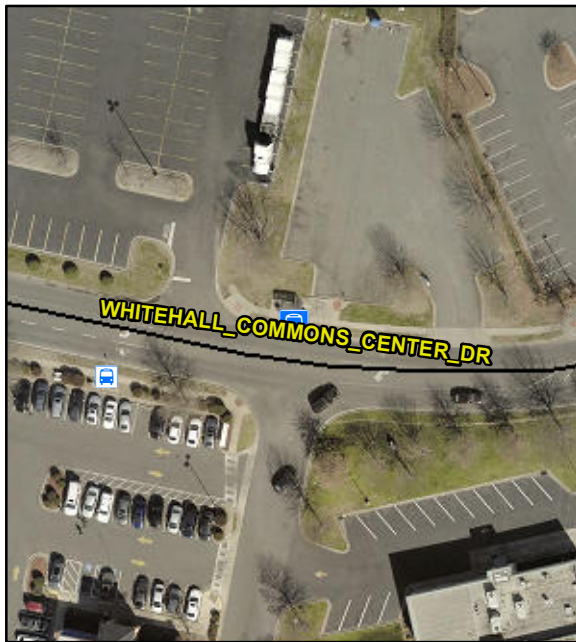

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area. Remove or Relocate
Protruding Objects/Obstructions.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, R302, R302.6,
R308.1.1.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	97.0
No	Boarding Area Slope %	2.7
Yes	Boarding Area XSlope %	2.0
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	48.0
No	PAR 1 Slope %	2.2
Yes	PAR 1 XSlope %	1.8
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	48.0
Yes	PAR 2 Slope %	1.7
No	PAR 2 XSlope %	2.8
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.4
N/A	Shelter	Yes
Yes	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	Yes
Yes	Clear Floor Space Width (in)	50.0
Yes	Clear Floor Space Length (in)	67.0
Yes	Clear Floor Space Slope %	1.6
Yes	Clear Floor Space XSlope %	1.1
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	94.0
N/A	Bench?	Yes
No	Protruding Objects?	Yes

CATS Stop ID: 42365

CATS Stop Description: Whitehall Commons Dr @ Lowe's

CATS Route ID: 41x

CATS Route Name: Steele Creek Express

Total Cost: \$ 4150.00

