


Access Compliance Report Public Rights-of-Way (Transit Stops)

Intersection ID: 10014482	Main Street: MALLARD_CREEK_RD	Cross Street: N/A	Location: W
ADA ID: B780E6FF9C70	Overall Compliance: No	Severity Score: 15	
Codes/Mitigation Info/Possible Solution		Field Measurements/Component Compliance	

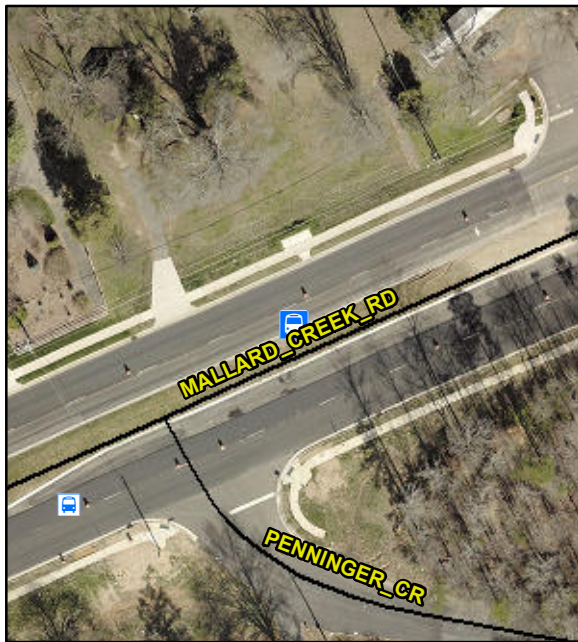

Possible Solutions:

**Remove & Replace Boarding Area.
Remove & Replace Sidewalk To
Boarding Area.**

Surveyor Notes:

N/A

PROW/ADA:

**402.2, 810.2.3, 810.2.4, R302, R302.5,
R302.6, R308.1.1.2**

Compliance	Description	Data
Yes	Boarding Area	Yes
Yes	Boarding Area Width (in)	60.0
Yes	Boarding Area Length (in)	114.0
No	Boarding Area Slope %	3.1
Yes	Boarding Area XSlope %	2.0
No	PAR 1 Exist?	Yes
Yes	PAR 1 Width (in)	60.0
Yes	PAR 1 Slope %	2.0
No	PAR 1 XSlope %	3.2
N/A	PAR 1 XSlope Location	Perp
No	PAR 2 Exist?	Yes
Yes	PAR 2 Width (in)	60.0
Yes	PAR 2 Slope %	0.1
No	PAR 2 XSlope %	2.7
N/A	PAR 2 XSlope Location	Perp
Yes	Boarding Area Connected to PAR?	Yes
N/A	Road Slope %	1.2
N/A	Shelter	No
N/A	Clear Floor Space	Yes
N/A	Clear Floor Space Shelter	No
N/A	Clear Floor Space Width (in)	192.0
N/A	Clear Floor Space Length (in)	60.0
N/A	Clear Floor Space Slope %	1.4
N/A	Clear Floor Space XSlope %	0.6
N/A	Alcove Condition?	No
Yes	Transit Sign?	Yes
Yes	Transit Sign Height (in)	91.0
N/A	Bench?	No
Yes	Protruding Objects?	No

CATS Stop ID: 40155

CATS Stop Description: **Mallard Creek Rd & Penninger Cir**

CATS Route ID: 22

CATS Route Name: **Graham Street**

Total Cost: \$ 2150.00

